



Modulelink(Shenzhen) Technology Co., Ltd.

[Http://www.modulelink.net](http://www.modulelink.net)

Optical network solutions provider

XFP 10G Transceiver M10GB-XFP-BIDI10

Features:

- Supports 9.95Gb/s to 10.5Gb/s bit rates
- Hot-pluggable XFP footprint
- Single LC for Bi-directional Transmission
- Maximum link length of 10km
- Built-in 1270/1330 WDM
- Uncooled 1270nm or 1330nm DFB Laser.
- Power dissipation <1.5W
- No Reference Clock required
- Built-in digital diagnostic functions
- Temperature range -5°C to 70°C
- Very low EMI and excellent ESD protection
- RoHS Compliant Part

Applications:

- 10GBASE-LR/LW 10G Ethernet
- 1200-SM-LL-L 10G Fibre Channel

Description:

MODULELINK' M10GB-XFP-U10& M10GB-XFP-D10 Bi-directional 10Gb/s (XFP) transceivers are compliant with the current XFP Multi-Source Agreement (MSA) Specification. They comply with 10-Gigabit Ethernet 10GBASE-LR/LW per IEEE 802.3ae and 10G Fibre Channel 1200-SM-LL-L. Digital diagnostics functions are available via a 2-wire serial interface, as specified in the XFP MSA.

Add: 3rd floor Block 2, Tianlong Science Industry Park, Kengzhi Town, Longgang Area, Shenzhen, China.

Tel: 86-755-86101649 Fax: 86-755-86101640

E-mail: sales@modulelink.net Website: www.modulelink.net

Dec 10 / 2011

Rev.1.3



Modulelink(Shenzhen) Technology Co., Ltd.

Http://www.modulelink.net

Optical network solutions provider

Specification:

Electrical Characteristics (Condition: T_a=TOP)

Parameter	Symbol	Min	Typ	Max	Uni	Note	
Main Supply Voltage	Vcc5	4.75		5.25	V		
Supply Voltage #2	Vcc3	3.13		3.45	V		
Supply Current – Vcc5 supply	Icc5			250	mA		
Supply Current – Vcc3 supply	Icc3			500	mA		
Module total power	P			2.5	W		
Transmitter							
Input differential impedance	R _{in}		100		Ω	1	
Differential data input swing	V _{in,pp}	120		820	mV		
Transmit Disable Voltage	VD	2.0		Vcc	V		
Transmit Enable Voltage	VEN	GND		GND+ 0.8	V		
Transmit Disable Assert Time				10	u		
Receiver							
Differential data output swing	V _{out,pp}	340	650	850	mV		
Data output rise time	t _r			38	p	2	
Data output fall time	t _f			38	p	2	
LOS Fault	VLOS fault	Vcc – 0.5		VccHOST	V	3	
LOS Normal	VLOS norm	GND		GND+0.5	V	3	
Power Supply Rejection	PSR	See Note 4 below					4

1. After internal AC coupling.
2. 20 – 80 %
3. Loss Of Signal is open collector to be pulled up with a 4.7k – 10kohm resistor to 3.15 – 3.6V. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
4. Per Section 2.7.1. in the XFP MSA Specification.

Optical Characteristics (Condition: T_a=TOP)

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Transmitter						
Operating Data Rate	B	9		10.5	Gb/s	
Bit Error Rate	BER			10 ⁻¹²		
Optical Modulation Amplitude (OMA)	POMA	-6		-1	dBm	1
Maximum Launch Power	P _{MAX}	-8.2		0.5	dBm	1

Add: 3rd floor Block 2, Tianlong Science Industry Park, Kengzhi Town, Longgang Area, Shenzhen, China.

Tel: 86-755-86101649 Fax: 86-755-86101640

Dec 10 / 2011

E-mail: sales@modulelink.net Website: www.modulelink.net

Rev.1.3



Modulelink(Shenzhen) Technology Co., Ltd.

Http://www.modulelink.net

Optical network solutions provider

Optical Wavelength	FTP910-2733	λ	1260	1270	1280	nm		
	FTP910-3327		1320	1330	1340			
Optical Extinction Ratio		ER	3.5			dB		
Sidemode Supression ratio		SSRmin	30			dB		
Rise/Fall Time (20%~80%)		Tr/Tf			50	ps		
Average Launch power of OFF Transmitter		POFF	-30			dBm		
Tx Jitter		Txj	Compliant with each standard requirements					
Optical Eye Mask			IEEE802.3ae					2
Receiver								
Operating Data Rate		B	9		10.5	Gb/s		
Receiver Sensitivity		R			-14	dBm	2	
Receiver Sensitivity (OMA)@10.5Gb/s		RSENS			-12.6	dBm	2	
Maximum Input Power		PMAX	+0.5			dBm	2	
Optical Center Wavelength	FTP910-2733	λ_c	1320	1330	1340	nm		
	FTP910-3327		1260	1270	1280			
Receiver Reflectance		Rrx			-12	dB		
LOS De-Assert		LOSD			-15	dBm		
LOS Assert		LOSA	-25			dBm		
LOS Hysteresis			1			dB		

Notes:

1. The optical power is launched into SMF.
2. Measured with a PRBS $2^{31}-1$ test pattern @10.3125Gbps BER< 10^{-12} .

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Storage Temperature	TST	-40	+85	°C
Operating Temperature	TIP	-5	+70	°C
Supply Voltage 1	VCC3	-0.5	+4.0	V
Supply Voltage 1	VCC5	-0.5	+6.0	V

Recommend Operation Environment:

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage 1	V _{CC}	+3.1	3.3	+3.5	V
Supply Voltage 1	V _{CC}	+4.75	5.0	+5.25	V
Operating Temperature	T _{OP}	-5	-	+70	°C

Add: 3rd floor Block 2, Tianlong Science Industry Park, Kengzhi Town, Longgang Area, Shenzhen, China.

Tel: 86-755-86101649 Fax: 86-755-86101640

E-mail:sales@modulelink.net Website: www.modulelink.net

Dec 10 / 2011

Rev.1.3




Modulelink(Shenzhen) Technology Co., Ltd.

Http://www.modulelink.net

Optical network solutions provider

Pin Assignment:

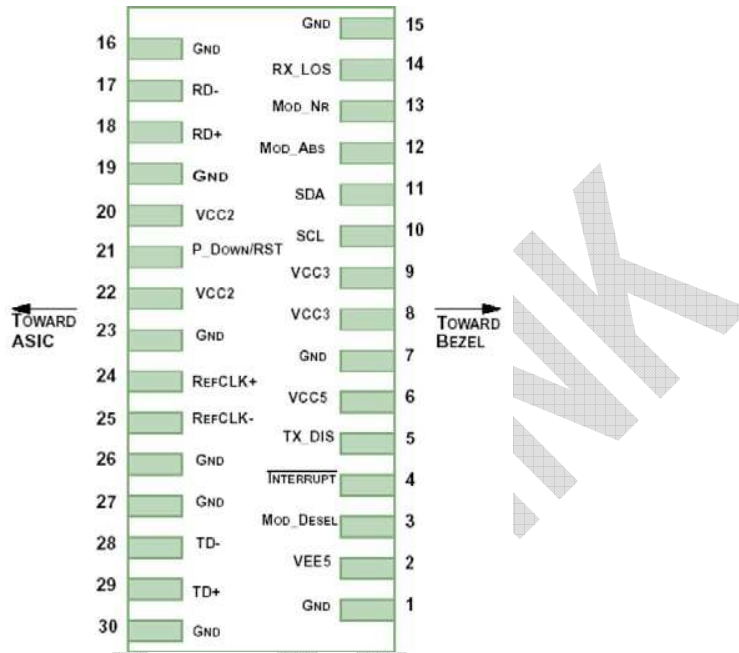

Pin Description:

Diagram of Host Board Connector Block Pin Numbers and Name

Add: 3rd floor Block 2, Tianlong Science Industry Park, Kengzhi Town, Longgang Area, Shenzhen, China.

Tel: 86-755-86101649 Fax: 86-755-86101640

Dec 10 / 2011

E-mail: sales@modulelink.net Website: www.modulelink.net

Rev.1.3



Modulelink(Shenzhen) Technology Co., Ltd.

Http://www.modulelink.net

Optical network solutions provider

Pin	Logic	Symbol	Name/Description	Ref.
1		GND	Module Ground	1
2		VEE5	Optional -5.2 Power Supply – Not required	
3	LVTTTL-I	Mod-Desel	Module De-select; When held low allows the module to , respond to 2-wire serial interface commands	
4	LVTTTL-O	Interrupt	Interrupt (bar); Indicates presence of an important condition which	2
5	LVTTTL-I	TX_DIS	Transmitter Disable; Transmitter laser source turned off	
6		VCC5	+5 Power Supply	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	LVTTTL-I	SCL	Serial 2-wire interface clock	2
11	LVTTTL-I/O	SDA	Serial 2-wire interface data line	2
12	LVTTTL-O	Mod_Abs	Module Absent; Indicates module is not present. Grounded in	2
13	LVTTTL-O	Mod_NR	Module Not Ready;	2
14	LVTTTL-O	RX_LOS	Receiver Loss of Signal indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver inverted data output	
18	CML-O	RD+	Receiver non-inverted data output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply – Not required	
21	LVTTTL-I	P_Down/RST	Power Down; When high, places the module in the low power stand-by mode and on the falling edge of P_Down Reset; The falling edge initiates a complete reset of the module	
22		VCC2	+1.8V Power Supply – Not required	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock non-inverted input, AC coupled on the host board	3
25	PECL-I	RefCLK-	Reference Clock inverted input, AC coupled on the host board – Not required	3
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter inverted data input	
29	CML-I	TD+	Transmitter non-inverted data input	
30		GND	Module Ground	1

Add: 3rd floor Block 2, Tianlong Science Industry Park, Kengzhi Town, Longgang Area, Shenzhen, China.

Tel: 86-755-86101649 Fax: 86-755-86101640

Dec 10 / 2011

E-mail: sales@modulelink.net Website: www.modulelink.net

Rev.1.3



Modulelink(Shenzhen) Technology Co., Ltd.

[Http://www.modulelink.net](http://www.modulelink.net)

Optical network solutions provider

Note

1. Module circuit ground is isolated from module chassis ground within the module.
2. Open collector; should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.
3. A Reference Clock input is not required .

Digital Diagnostic Functions:

As defined by the XFP MSA 1, Modulelink's XFP transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- Transceiver temperature
- Laser bias current
- Transmitted optical power
- Received optical power
- Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL pin) is generated by the host. The positive edge clocks data into the XFP transceiver into those segments of its memory map that are not write-protected. The negative edge clocks data from the XFP transceiver. The serial data signal (SDA pin) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 000h to the maximum address of the memory.

For more detailed information including memory map definitions, please see the XFP MSA Specification.

Add: 3rd floor Block 2, Tianlong Science Industry Park, Kengzhi Town, Longgang Area, Shenzhen, China.

Tel: 86-755-86101649 Fax: 86-755-86101640

Dec 10 / 2011

E-mail: sales@modulelink.net Website: www.modulelink.net


Rev.1.3




Modulelink(Shenzhen) Technology Co., Ltd.

Http://www.modulelink.net

Optical network solutions provider

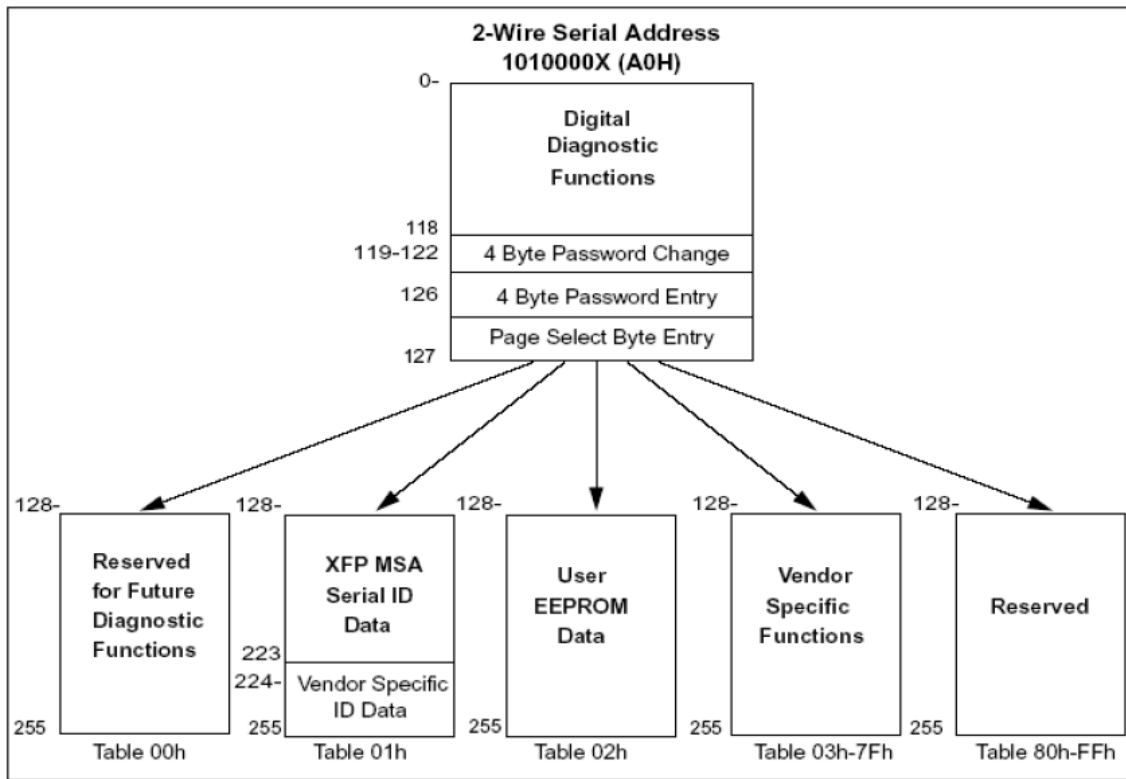

Recommended Circuit:

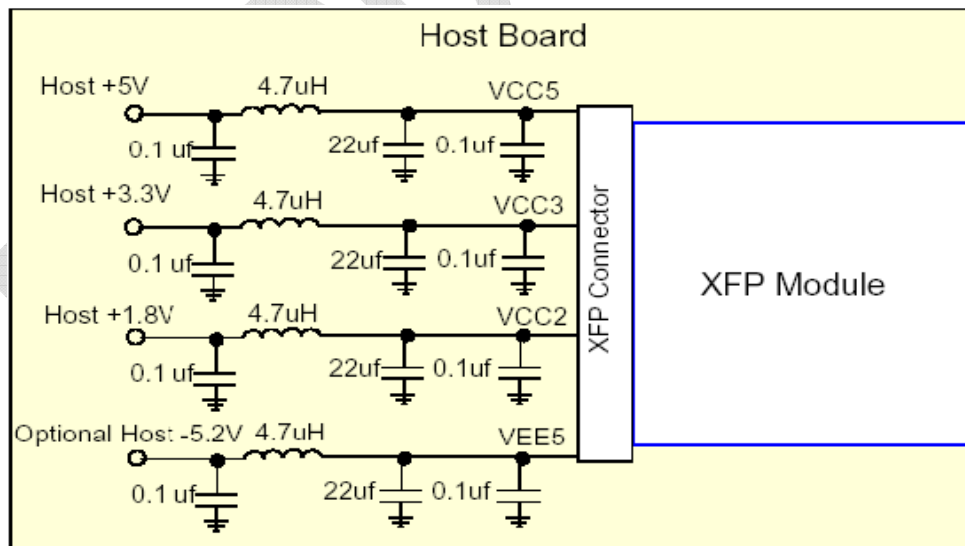

Recommended Host Board Power Supply Circuit

Add: 3rd floor Block 2, Tianlong Science Industry Park, Kengzhi Town, Longgang Area, Shenzhen, China.

Tel: 86-755-86101649 Fax: 86-755-86101640

Dec 10 / 2011

E-mail: sales@modulelink.net Website: www.modulelink.net


Rev.1.3



Modulelink(Shenzhen) Technology Co., Ltd.

Http://www.modulelink.net

Optical network solutions provider

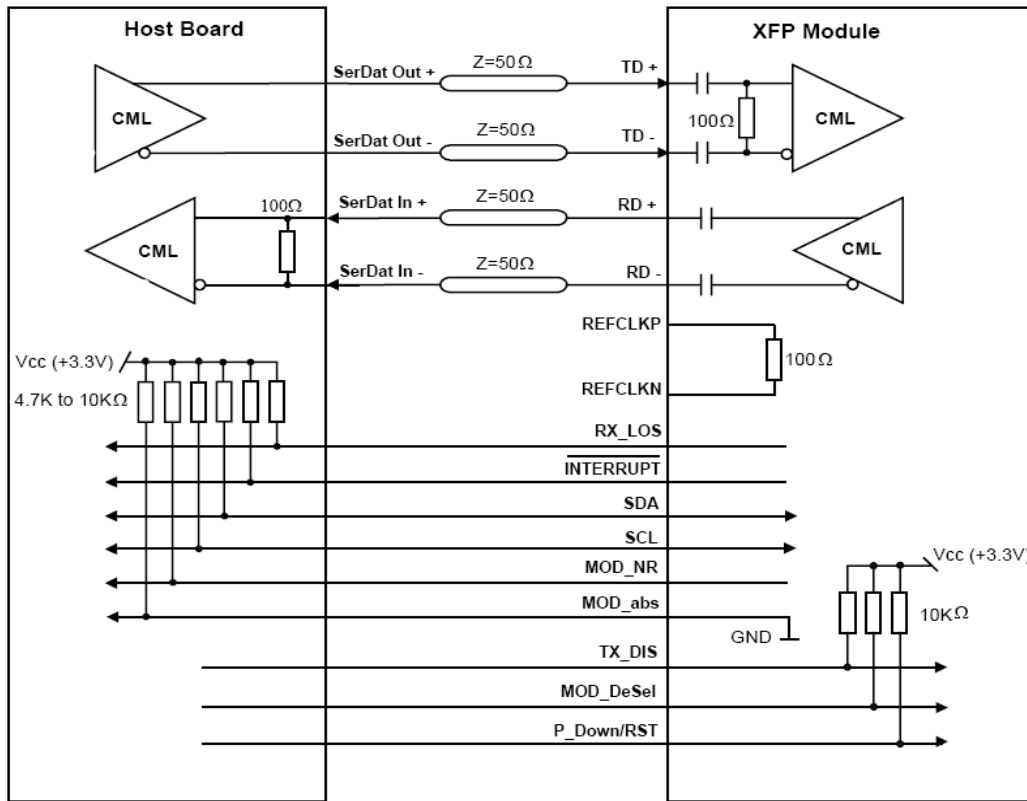

Recommended High-speed Interface Circuit

MODULE

Add: 3rd floor Block 2, Tianlong Science Industry Park, Kengzhi Town, Longgang Area, Shenzhen, China.

Tel: 86-755-86101649 Fax: 86-755-86101640

Dec 10 / 2011

E-mail: sales@modulelink.net Website: www.modulelink.net

Rev.1.3







Modulelink(Shenzhen) Technology Co., Ltd.

[Http://www.modulelink.net](http://www.modulelink.net)

Optical network solutions provider

Mechanical Dimensions:

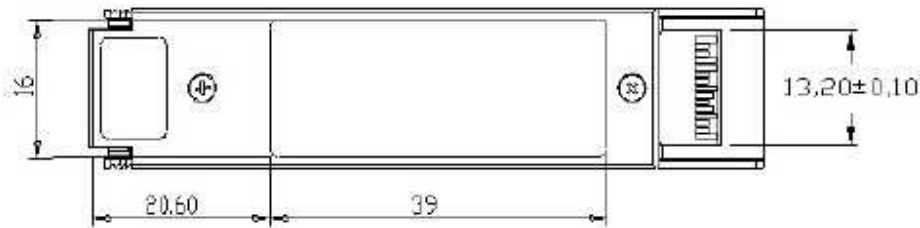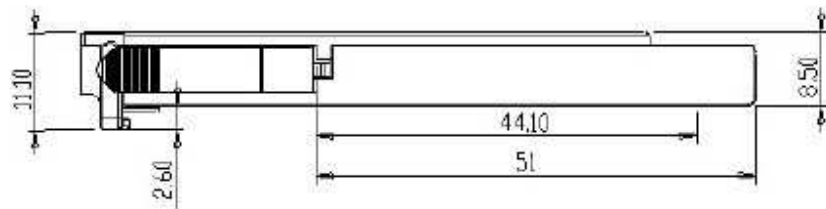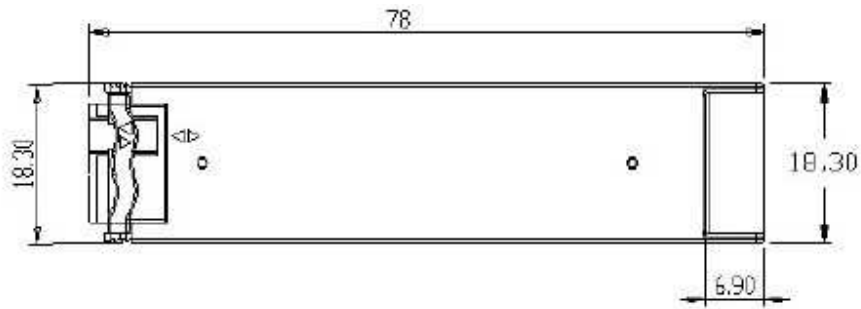

Add: 3rd floor Block 2, Tianlong Science Industry Park, Kengzhi Town, Longgang Area, Shenzhen, China.

Tel: 86-755-86101649 Fax: 86-755-86101640

Dec 10 / 2011

E-mail: sales@modulelink.net Website: www.modulelink.net

Rev.1.3