



3D8W4_1.6RP series

3Watt - 4:1 Regulated Single & Dual output

DC-DC Converter

3 Watt

- ⊕ Wide input range (4:1)
- ⊕ Highest Power Density in 8 pin DIP package
- ⊕ 1.6kVDC isolation
- ⊕ Efficiency up to 80%
- ⊕ Full SMD technology
- ⊕ Short circuit protection (SCP)
- ⊕ Operating temperature range: -40°C ~ +80°C
- ⊕ Remote on/off Control
- ⊕ Under voltage lock-out circuit

Introducing our latest 3D8W4_1.6RP series, designed to deliver top-tier performance in a compact form factor. With a wide 4:1 input range and the highest power density in an 8-pin DIP package, this module is engineered for space-conscious yet power-hungry applications. Featuring 1.6kVDC isolation and efficiency of up to 84%, it ensures optimal energy transfer with robust protection. Built with full SMD technology, the module incorporates short circuit protection (SCP) for added safety and reliability. Operating efficiently in temperatures ranging from -40°C to +80°C, it adapts seamlessly to various environmental conditions. Additionally, the remote on/off control and under voltage lock-out circuit offer precise power management and protection for sensitive systems.



Common specifications	
Efficiency	See table, typ.
Short circuit protection:	Indefinite
Cooling:	Nature Convection
Operation temperature range:	-40°C~+80°C (with derating)
Storage temperature:	-55°C~+125°C
Storage humidity range:	< 95% relative humidity
Pin soldering resistance temperature:	300°C MAX, 1.5mm away from case for 10s.
Case material:	Non conductive black plastic (UL94V-0 rated)
MTBF (MIL-HDBK-217F@25°C):	>820,000 hours
Weight:	3.6g
Switing Frqeunchcy	100kHz, min.

Input specifications	
Voltage Range	See table
Start up Time (Nominal Vin and constant resistive load)	30mS, typ.
Input Current	See table
No-Load Input Current	See table
Input Filter	Capacitor
Input Reflected Ripple Current(5)	20mA pk-pk
Remote on/off	
ON:	open or high impedance
OFF:	2-4mA input current (via 1K)
Off stand by input current (Nominal Vin)	2.5mA, max.
Under Voltage Lockout	
12V Modes Module ON / OFF	4.2VDC / 3.5VDC, typ.
24V Modes Module ON / OFF	8.5VDC / 7.0VDC, typ.
48V Modes Module ON / OFF	17.5VDC / 15.5VDC, typ.

Isolation specifications	
Isolation voltage	1600VDC
Isolation resistance	500VDC 1000 MΩ
Isolation capacitance	1000M Ohm,min.

Example:
3D8W4_1205S1.6RP
 3 = 3Watt; D8 = DIP8; W4 = Wide input (4:1); 12 = 12Vin; 05 = 5Vout;
 S = Single output; 1.6 = 1.6kVDC; R = Regulated output; P = Short circuit protection

Output specifications	
Voltage accuracy	±1%
Maximun output current	See table
No load output voltage accuracy	%
Line regulation	±0.2%,max.
Load regulation	(From 0% to 100% Load) ±1.0%,max.
Cross regulation (dual output) (1)	±5%
Ripple & noise (20 MHz bandwidth) (2)	Single 150mVpp,max. Dual 100mVpp,max.
Temperature coefficient	±0.02%/°C
Capacitive load (3)	See table
Transient recovery time (4)	500us, typ.
Transient response deviation (4)	±3%, max. single output 3.3V, 5V: ±5%, max.

EMC specifications		
CE(8)	EN55032	CLASSA
RE	EN55032	CLASSA
ESD	IEC61000-4-2	perf. Criteria A
RS	IEC61000-4-3	perf. Criteria A
EFT(9)	IEC61000-4-4	perf. Criteria A
Surge(9)	IEC61000-4-5	perf. Criteria A
CS	IEC61000-4-6	perf. Criteria A
PFMF	IEC61000-4-8	perf. Criteria A

Note:

1. One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
2. Ripple/Noise measured with a 10μF electrolytic capacitor and 0.1μF ceramic capacitor.
3. Test by minimal Vin and constant resistive load.
4. Test by normal Vin and 100%-25% load, 25% load step change.
5. Measured Input reflected ripple current with a simulated source inductance of 27μH and a source capacitor Cin (47μF, ESR<1.0Ω) .
6. "Nature Convection" is usually about 30-65 LFM but is not equal to still air (0 LFM).
7. Exceeding the absolute ratings of the unit could cause damage. It's not allowed for continuous operating ratings.
8. Input filter components are required to help meet conducted emission class A, Which application refer to the EMI Filter (Conduct) .
9. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5. The filter capacitor we suggest: Nippon - chemi - con KY series, 220μF/100V.

3D8W4_1.6RP series


3Watt - 4:1 Regulated Single & Dual output

Product Selection Guide

Part Number	Input Voltage Range [V]	Input current [mA, max/min]	Output Voltage [VDC]	Output current [mA, max/min]	Efficiency [%; min/typ]	Capacitive load [μ F]
3D8W4_1203S1.6RP	12 (4.5-18)	257/30	3.3	700/0	75	3300
3D8W4_1205S1.6RP	12 (4.5-18)	309/45	5	600/0	81	1680
3D8W4_1212S1.6RP	12 (4.5-18)	301/55	12	250/0	83	470
3D8W4_1215S1.6RP	12 (4.5-18)	301/60	15	200/0	83	330
3D8W4_1205D1.6RP	12 (4.5-18)	313/30	\pm 5	300/0	80	\pm 1000
3D8W4_1212D1.6RP	12 (4.5-18)	305/55	\pm 12	125/0	82	\pm 220
3D8W4_1215D1.6RP	12 (4.5-18)	301/60	\pm 15	100/0	83	\pm 220
3D8W4_2430S1.6RP	24 (9-36)	127/25	3.3	700/0	76	3300
3D8W4_2405S1.6RP	24 (9-36)	152/20	5	600/0	82	1680
3D8W4_2412S1.6RP	24 (9-36)	149/30	12	250/0	84	470
3D8W4_2415S1.6RP	24 (9-36)	149/35	15	200/0	84	330
3D8W4_2405D1.6RP	24 (9-36)	154/25	\pm 5	300/0	81	\pm 1000
3D8W4_2412D1.6RP	24 (9-36)	151/30	\pm 12	125/0	83	\pm 220
3D8W4_2415D1.6RP	24 (9-36)	149/35	\pm 15	100/0	84	\pm 220
3D8W4_4830S1.6RP	48 (18-75)	65/10	3.3	700/0	74	3300
3D8W4_4805S1.6RP	48 (18-75)	77/10	5	600/0	81	1680
3D8W4_4812S1.6RP	48 (18-75)	77/15	12	250/0	81	470
3D8W4_4812S1.6RP	48 (18-75)	77/15	12	250/0	81	470
3D8W4_4815S1.6RP	48 (18-75)	76/15	15	200/0	82	330
3D8W4_4805D1.6RP	48 (18-75)	79/20	\pm 5	300/0	79	\pm 1000
3D8W4_4812D1.6RP	48 (18-75)	78/20	\pm 12	125/0	80	\pm 220
3D8W4_4815D1.6RP	48 (18-75)	78/25	\pm 15	100/0	80	\pm 220

Typical characteristics

Temperature derating graph (Natural convection)


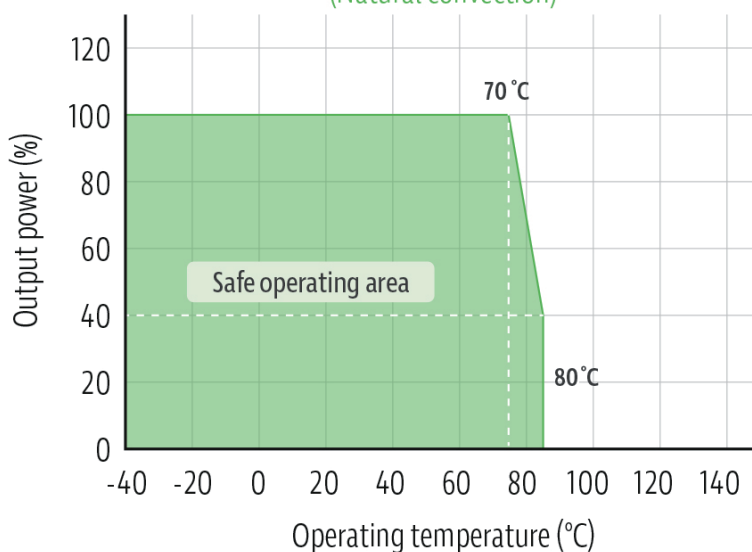


3D8W4_1.6RP series

3Watt - 4:1 Regulated Single & Dual output


Output Ripple & Noise Measurement Test

Use a 10 μ F electrolytic capacitor and 0.1 μ F ceramic capacitor.
The Scope measurement bandwidth is 20MHz.

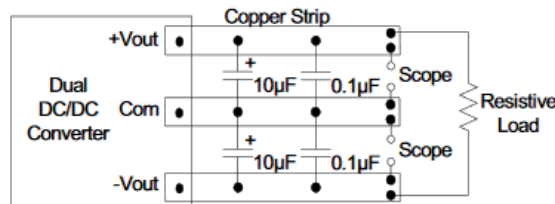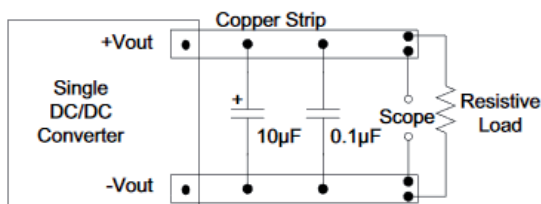


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (27 μ H) and a source capacitor C_{in} (47 μ F, ESR<1.0 Ω at 100kHz) at nominal input and full load.

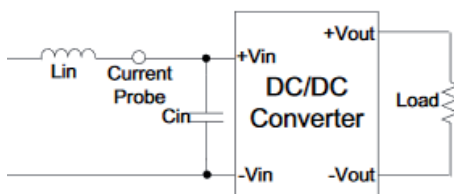

EFT/Surge Filter

Input filter components (C2) is used to help meet IEC .61000-4-4 and IEC61000-4-5

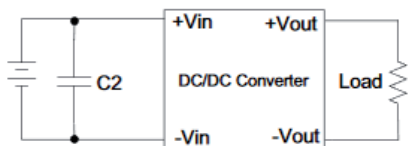


	C2
3D8W4_1.6RP	220 μ F,100V

EMI Filter Conducted Emissions

Input filter components (C1, L1) are used to meet EMI test criterial A.


These components should be mounted as close as possible to the module; and all leads should be minimized to decrease

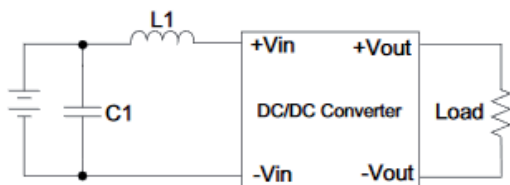

	C1	L1
3D8W4_12XXXXXX	1210,10 μ F,35V	2.2 μ H
3D8W4_24XXXXXX	1210,2.2 μ F,100V	
3D8W4_48XXXXXX	1210,4.7 μ F,100V	

Remote ON / OFF Test Step




Input current (2~4mA) via 1K Ω to Pin2 , converter OFF.
open or high impedance , converter ON

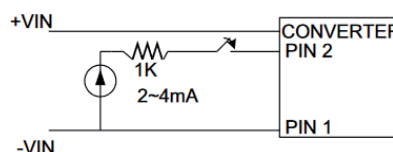

3D8W4_1.6RP series

3Watt - 4:1 Regulated Single & Dual output

Mechanical dimensions



8 Pin DIL Package

- Notes : All dimensions are typical in millimeters (inches).
1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Pin to case tolerance: ± 0.5 (± 0.02)
 4. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS

PIN NUMBER	SINGLE	DUAL
1	-V Input	-V Input
2	Remote On/ Off	Remote On/Off
4	+V Input	+V Input
5	+V Output	+V Output
6	N.P.	Common
7	-V Output	-V Output