



Noise Cancelling Electret Condenser Microphone Specification

Series M4530

Model Number: M4530CD543LF

Version 1.0

Address: 28 Genting Lane, #08-07 Platinum 28, Singapore 349585

Tel: +65-6493 5035

Fax: +65-6493 5037

Website: <http://www.flezon.com>

Email: flezon@flezon.com

ALL RIGHTS ARE STRICTLY RESERVED. ANY PORTION OF THIS PAPER SHALL NOT BE REPRODUCED, COPIED, OR TRANSLATED TO ANY OTHER FORMS WITHOUT PERMISSION FROM FLEZON GLOBAL LIMITED.

1. ELECTRICAL SPECIFICATIONS



Model No.: M4530CD543LF

Description: MIC BI 4530 2V 2.2KR 54/3 RoHS


MODEL NO.		M4530CD543LF
DIAMETER (A) ± 0.1	mm	$\varnothing 4.5$
HEIGHT (B) ± 0.2	mm	3.0
SENSITIVITY (0 dB = 1V / Pa) AT 1K Hz	dB	- 54.0 \pm 3.0 (at L = 50cm)
DIRECTIVITY		NOISE CANCELLING
POWER SUPPLY (Vs)	V	2.0
RESISTANCE LOADING (RL)	Ω	2.2 K
OPERATING VOLTAGE RANGE	V	1.0 ~ 10.0
MAX. CURRENT	mA	0.5
TERMINAL		NIL
HOUSING MATERIAL		ALUMINUM
S / N RATIO	dB	MORE THEN 55.0
FREQUENCY RANGE	Hz	100 - 10000

2. PHYSICAL DIMENSION




All dimensions stated are in mm


TOP VIEW



SIDE VIEW




BOTTOM VIEW

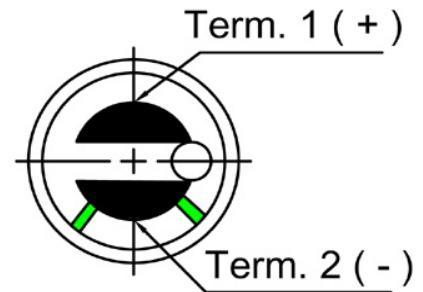

SCHEMATIC DIAGRAM

$V_s = 2V$
 $R_L = 2.2K \Omega$

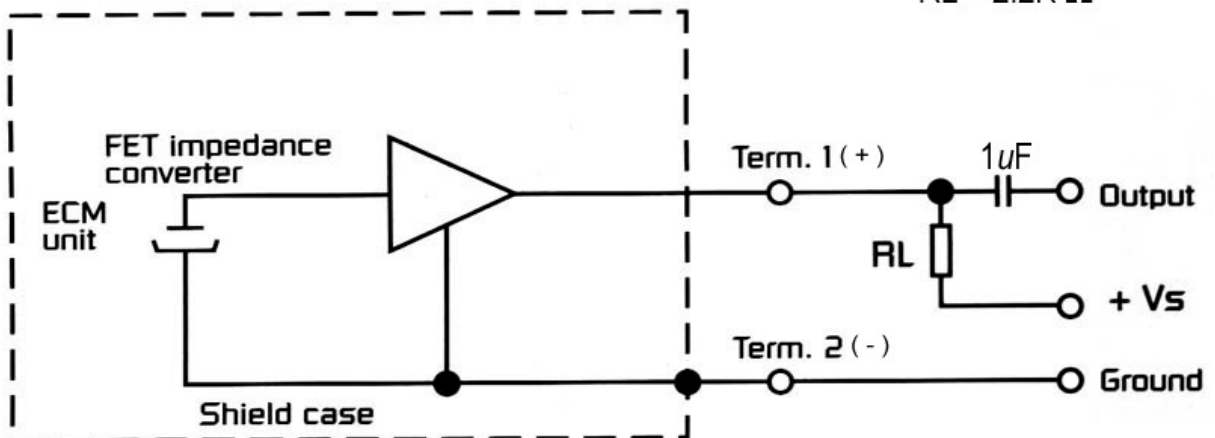

Revision History

Revision	Date	Description
1.0	2012.08	Modify Draw

FLEZON CONFIDENTIAL