



**WINSTAR Display Co.,Ltd.**  
**華凌光電股份有限公司**



# Winstar Display Co., LTD

## 華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

### SPECIFICATION

**MODULE NO.: WF101JTYAHLNT0#**

### General Specifications

Item	Dimension	Unit
Size	10.1	inch
Dot Matrix	1024 RGB x 600	dots
Module dimension	235(W) x143(H) x 6.65 (D)	mm
Active area	222.72 (H) x 125.28(V)	mm
Dot pitch	0.2175(W) x 0.2088(H)	mm
LCD type	TFT, Normally Black, Transmissive	
Interface	LVDS	
Driver IC	EK79001HN + EK73215BCGA or equivalent	
Viewing Angle	85/85/85/85	
Aspect Ratio	16:9	
Backlight Type	LED, Normally White	
Touch Panel	With RTP	
Surface	Anti-Glare	

\*Color tone slight changed by temperature and driving voltage.

# Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

# Electrical Characteristics

Typical Operation Conditions (At Ta = 25 °C)

Item	Symbol	Min	Typ	Max	Unit
Digital Power Supply Voltage For LCD	VDD	3	3.3	3.6	V
Analog Power Supply Voltage	AVDD	9.89	10.2	10.5	V
Gate On Power Supply Voltage	VGH	19.4	20.0	20.6	V
Gate Off Power Supply Voltage	VGL	-10.3	-10.0	-9.7	V
Common Power Supply Voltage	VCOM	4.0	4.3	4.6	V
Input logic high voltage	VIH	0.7 V <sub>DD</sub>	-	V <sub>DD</sub>	V
Input logic low voltage	VIL	0	-	0.3 V <sub>DD</sub>	V

# Interface

## TFT LCD MODULE

Pin No.	Symbol	Description
1	VCOM	Common voltage
2	VDD	Digital power
3	VDD	Digital power
4	NC	Not connect
5	Reset	Global reset pin. Active low to enter reset state. Suggest to connecting with an RC reset circuit for stability. Normally pull high. (R=10KΩ, C=1μF)
6	STBYB	Standby mode, normally pull high STBYB="1", normal operation STBYB="0", timing control, source driver will turn off, all output are high-Z
7	GND	Digital ground
8	RXIN0-	Negative LVDS differential data inputs
9	RXIN0+	Positive LVDS differential data inputs
10	GND	Digital ground
11	RXIN1-	Negative LVDS differential data inputs
12	RXIN1+	Positive LVDS differential data inputs
13	GND	Digital ground
14	RXIN2-	Negative LVDS differential data inputs
15	RXIN2+	Positive LVDS differential data inputs
16	GND	Digital ground
17	RXCLKN-	Negative LVDS differential clock inputs
18	RXCLKN+	Positive LVDS differential clock inputs
19	GND	Digital ground
20	RXIN3-	Negative LVDS differential data inputs
21	RXIN3+	Positive LVDS differential data inputs
22	GND	Digital ground
23	NC	Not connect
24	NC	Not connect
25	GND	Digital ground
26	NC	Not connect
27	NC	Not connect
28	SELB	6-bit/8-bit input select SELB = L , 8-bit ; SELB = H , 6-bit

29	AVDD	Analog power
30	GND	Digital ground
31	LED-	LED Cathode
32	LED-	LED Cathode
33	L/R	Left or right display control
34	U/D	Up / down display control
35	VGL	Negative power for TFT
36	NC	Not connect
37	NC	Not connect
38	VGH	Positive power for TFT
39	LED+	LED Anode
40	LED+	LED Anode


When L/R="0",set right to left scan direction.

When L/R="1",set left to right scan direction.

When U/D="0",set top to bottom scan direction.

When U/D="1",set bottom to top scan direction.

# Contour Drawing

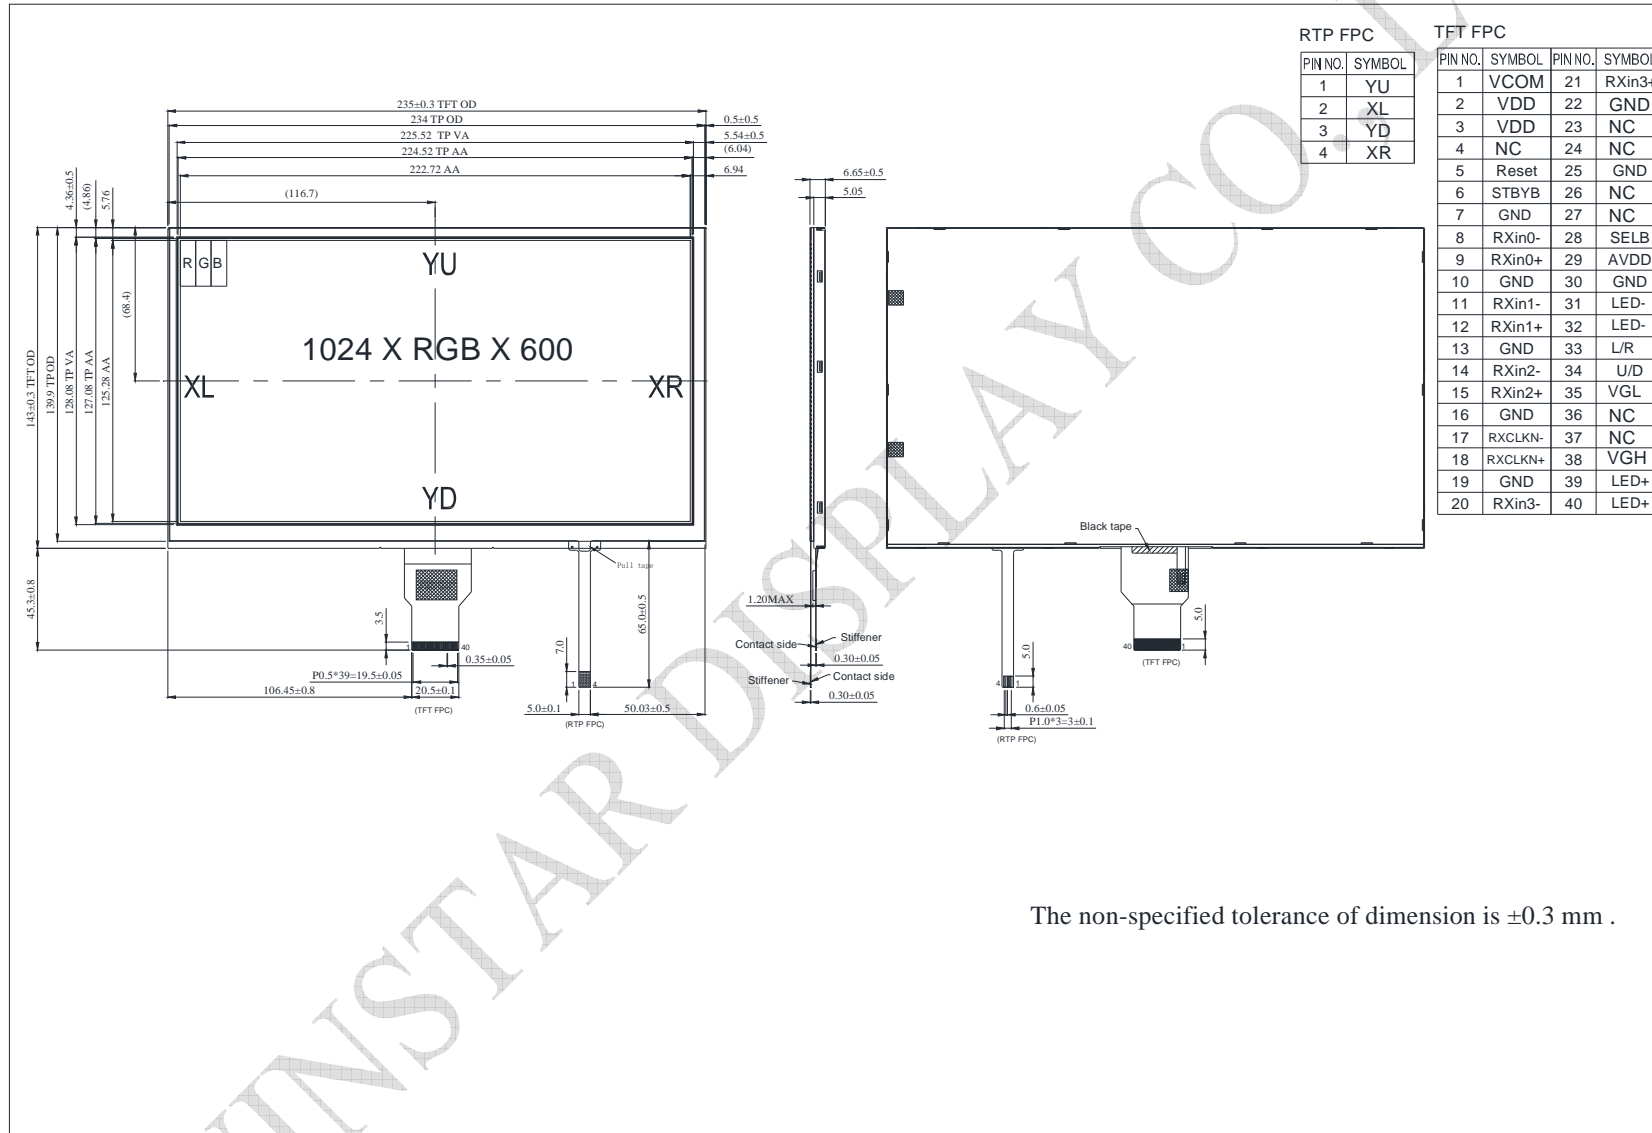

The non-specified tolerance of dimension is  $\pm 0.3$  mm .