
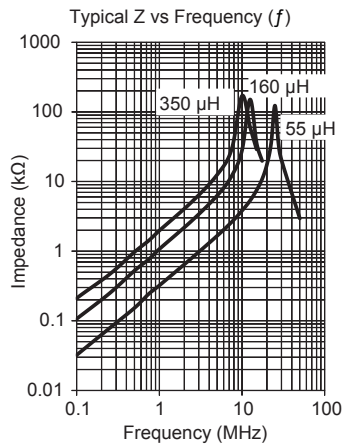


SMESC

SMD version

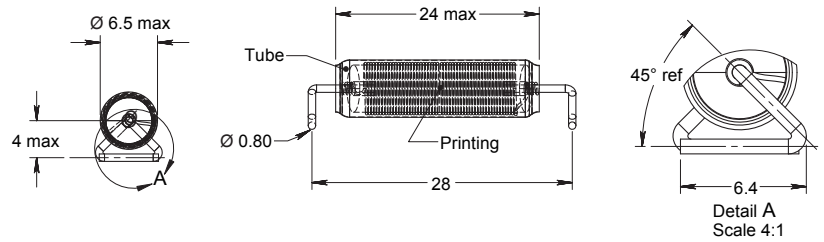

| Part No | Inductance | f _L | Tol | DCR | Rated DC | Core Material |
|---------------|------------|----------------|-------|----------|-------------|---------------|
| | L (μH) | (kHz) | ± (%) | max (mΩ) | Current (A) | |
| SMESC-550M-04 | 55 | 100 | 20 | 1560 | 0.70 | Iron Dust |
| SMESC-131M-04 | 130 | 100 | 20 | 5760 | 0.15 | Iron Dust |
| SMESC-161M-04 | 160 | 100 | 20 | 7920 | 0.30 | Iron Dust |
| SMESC-351M-04 | 350 | 100 | 20 | 25200 | 0.15 | Iron Dust |
| SMESC-560M-04 | 56 | 100 | 20 | 360 | 1.50 | Ferrite |
| SMESC-750M-04 | 75 | 100 | 20 | 780 | 0.70 | Ferrite |
| SMESC-101M-04 | 100 | 100 | 20 | 780 | 1.00 | Ferrite |
| SMESC-221M-04 | 220 | 100 | 20 | 3120 | 0.50 | Ferrite |
| SMESC-331M-04 | 330 | 100 | 20 | 5300 | 0.30 | Ferrite |
| SMESC-471M-04 | 470 | 100 | 20 | 7800 | 0.30 | Ferrite |
| SMESC-681M-04 | 680 | 100 | 20 | 16800 | 0.20 | Ferrite |
| SMESC-122M-04 | 1200 | 100 | 20 | 40800 | 0.10 | Ferrite |


SPQ :

| | |
|--------------|--------------|
| Packing Form | Taped / Reel |
| Radial | 550 [-04] |

Revision date : 11 Jul 2017

Remarks :

- Single layer - Model with tube are suitable for application in "Power Line", rated voltage 230V AC (Test voltage 500V DC).

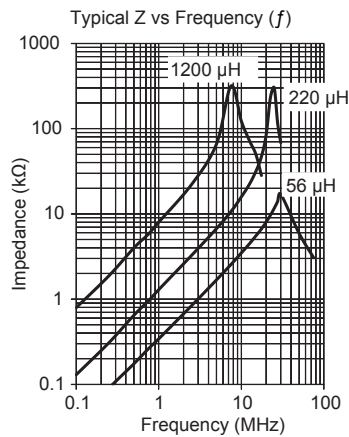

Suppression Coils