
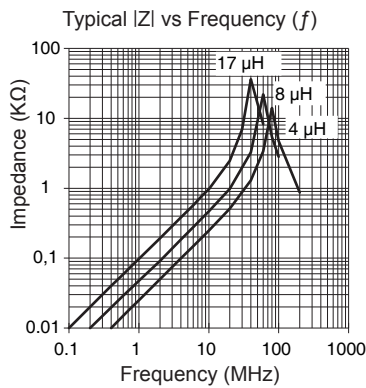


**SSSC**

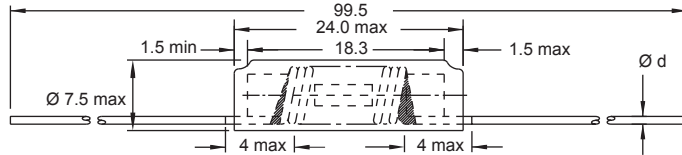

Part No	Inductance	$f_L$	Tol	DCR	Rated DC	$\varnothing d$
	L ( $\mu H$ )	(MHz)	$\pm$ (%)	max (m $\Omega$ )	Current (A)	(mm)
SSSC-4R0M-00	4	1	20	14	6	0.8
SSSC-6R0M-00	6	1	20	17	4	0.75
SSSC-8R0M-00	8	1	20	28	3	0.63, 0.65
SSSC-170M-00	17	0.1	20	63	2	0.45

Single layer

Core Material : Ferrite

Revision date : 11 Aug 2014

SPQ :

Packing Form	Loose / Box
Axial	500 [-00]

Remarks :- Available also without insulating material (SSSC/B)  
 - Single layer - Model with Insulation Foil are suitable for Application in "Power Line", rated voltage 230V AC (Testvoltage 500V DC).