

FC-500-0SB FC-500-0DB Plastic Optical Fiber

Datasheet



DESCRIPTION

Firecomms POF is a high performance optical fiber available in both simplex and duplex variants. This optical fiber has a high-purity 1 mm PMMA core with specially selected transparent polymer cladding. The core and cladding are surrounded by a 2.2 mm polyethylene (PE) jacket.

This POF cable is delivered on reels for convenience when installing runs of cable into equipment or buildings, making harness assemblies, or making custom length patch cords in small quantities.



Table 1
ORDERING INFORMATION / PART NUMBERS

Part Number	Name	Description
FC-500-0SB	500m Reel Simplex POF Cable	SI-POF 2.2 mm simplex
FC-500-0DB	500m Reel Duplex POF Cable	SI-POF 2.2 mm duplex

APPLICATIONS

- Control links within high voltage electrical control equipment
- Data communication where extreme immunity to EMI is required
- Links between equipment that requires electrical isolation to be maintained
- Rugged links in hostile environments

FEATURES

- Cost-effective, rugged optical links
- Compatible with IEC 60793-2-40 Class A4a standard
- Flameproof to UL grade VW-1
- Available in reels for on-site installation, or for making complex harnesses
- Suitable for use with Firecomms POF transceivers, including RedLink[®], LC and OptoLock[®].

SPECIFICATIONS

Table 2
Cable Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Storage Temperature	T_{stg}	-55		+85	°C
Operating Temperature	T_{op}	-55		+85	°C
Minimum Bend Radius	R_{min}	25			mm
Repeat Bending Endurance ^[1]		10,000			
Numerical Aperture	NA		0.5		
Attenuation at 650 nm	α			0.19	dB/m
Tensile Stress Simplex/Duplex		70/140			N
UL Flame Resistant Rating		VW-1			
Fiber Diameter, including Cladding	D_c	0.94	1	1.06	mm
Cable Diameter – Simplex	D_j	2.13	2.2	2.27	mm
Minor Axis – Duplex	D_j	2.13	2.2	2.27	mm
Major Axis – Duplex	D_m	4.3	4.4	4.5	mm
Jacket Material	Chlorinated Polyethylene				
Jacket Color	Black				

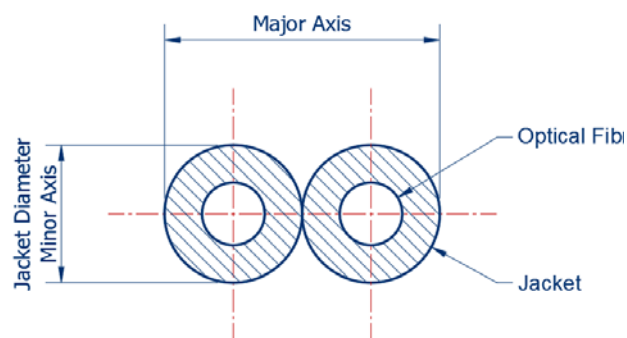


Figure 1
Duplex POE Cross-section

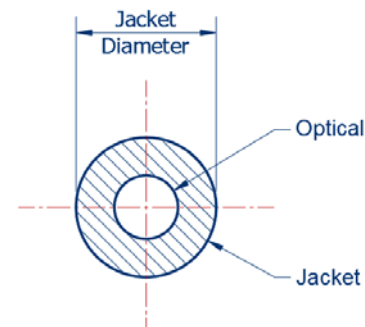


Figure 2
Simplex POE Cross-section

Note:

Repeat bending loss increment ≤ 1 dB (90° bend in direction of minor axis, 25 mm radius, deadweight 500 g).

For the most recent revision or further information please visit www.firecomms.com or contact the company directly at the following address, Firecomms Ltd, 2200 Airport Business Park, Cork, IRELAND. Copyright© 2004-2018 Firecomms. All rights reserved. Firecomms refers to Firecomms Limited and/or its subsidiaries. Firecomms assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein.