


RST-8002200-P-75-SMAM-G

Electrical Characteristics

Parameters	Specification	Unit
Frequency Range	824 ~ 960 1710 ~ 1900 ~ 2170	MHz
VSWR, max	2.0	-
Impedance	50	Ω
Power	30	W
Gain, typ	2.2	dBi
Polarization	Vertical	-
Azimuth	Omni - Direction	-
Operating Temperature Range	-40 ~ +60	$^{\circ}\text{C}$
Storage Temperature Range	-45 ~ +85	$^{\circ}\text{C}$
Lighting Protection	DC- Grounding	-
Connector type	SMA Male	-

Dimensions

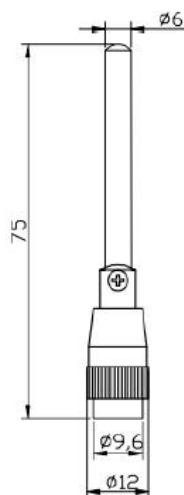

May, 2016