


■ **SPECIFICATIONS**


ANTENNA	
PARAMETER	VALUE
Frequency Range	2.4 ~ 2.5 GHz
VSWR, max	2.5
Impedance	50 Ω
Gain (typical)	2.0 dBi
Azimuth	Omni-direction
Power, Max	50 w
Polarization	Vertical
Connector Type	SMA male
Weight, Max – g	2.6

■ **MECHANICAL SPECIFICATIONS**

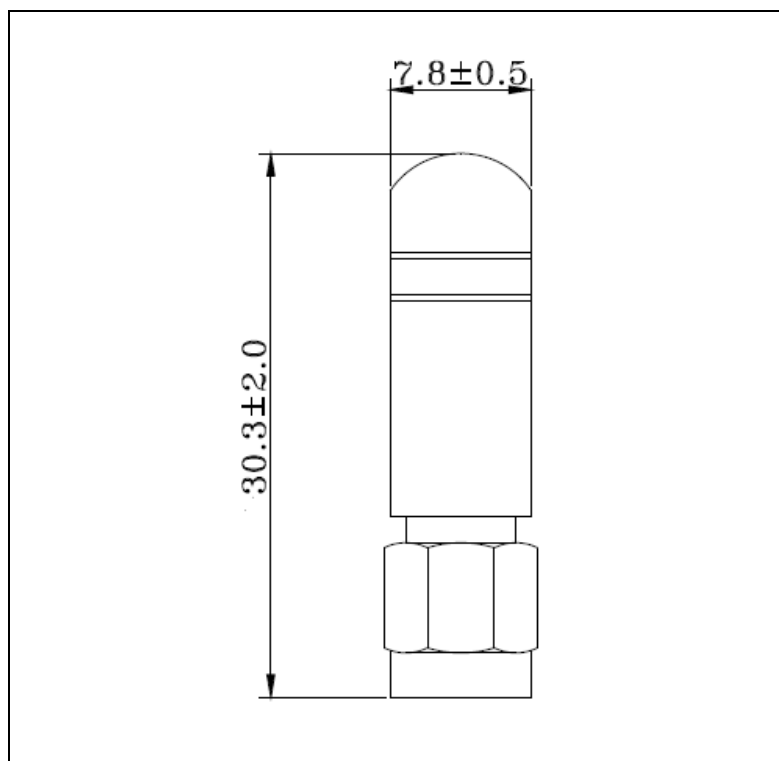

Tolerance:  $\pm 0.2$  mm

#### ELECTRICAL CHARACTERISTICS

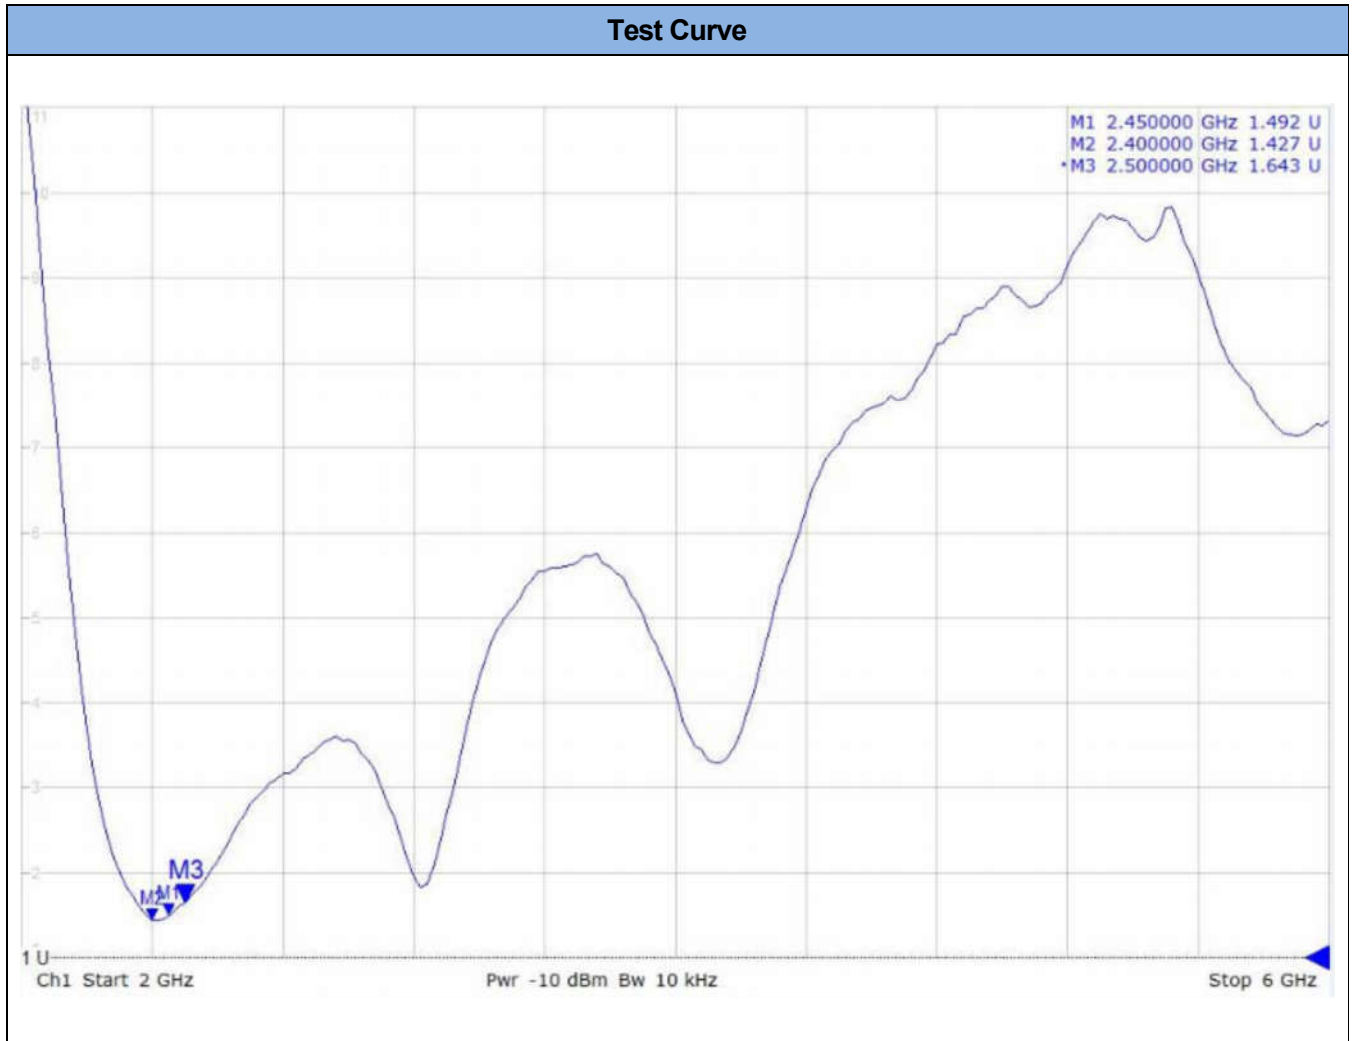

■ **ENVIRONMENTAL SPECIFICATIONS**

PARAMETER	VALUE
Operating Temperature Range	-40 to +85°C
Storage Temperature Range	-40 to +125°C

May, 2016