

Power Ring Film Capacitor 1600 μ F, 450 Vdc

The 700D16894-601 Power Ring is a 450 Vdc, 1600 μ F DC Link Capacitor with an ESR of 98 micro-Ohms at 20 kHz and an ESL of less than 5 nH.



Electrical Specifications

Part #: 700D16894-601

Capacitance/Tolerance: 1600 μ F \pm 10%

DC Voltage Rating: 450 Vdc

Dielectric/Construction: Metallized polypropylene.
Single section design

Dielectric Withstand Voltage: Units 100% tested at DC potential of 560 Volts for two minutes at 25°C

ESL: Less than 5 nH in a suitable laminar bus structure


Thermal Resistance: 1.07°C/W (case side cooling only)
0.55°C/W (case and bus side cooling only)

Operating Temperature: -40°C to +85°C at full DC voltage rating


Voltage, Temperature De-rating: De-rate voltage linearly to 250 Volts from +85°C to +107°C, with respect to hotspot temperature

System Fault Current Rating: 10,000 Amps maximum (external to the capacitor)

Typical ESR vs. Frequency:

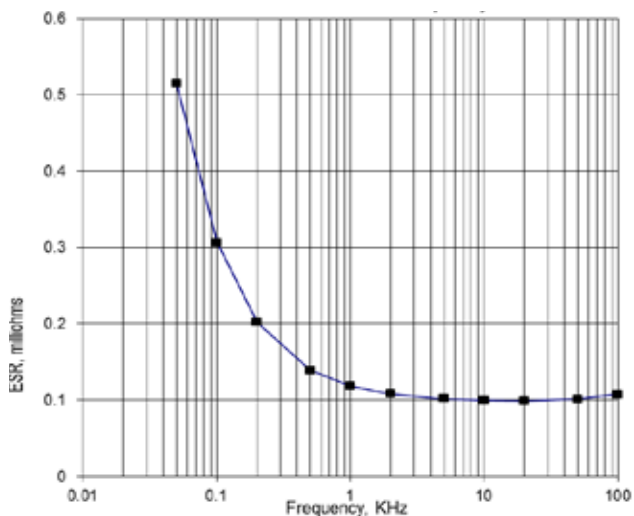

RMS Current Rating:

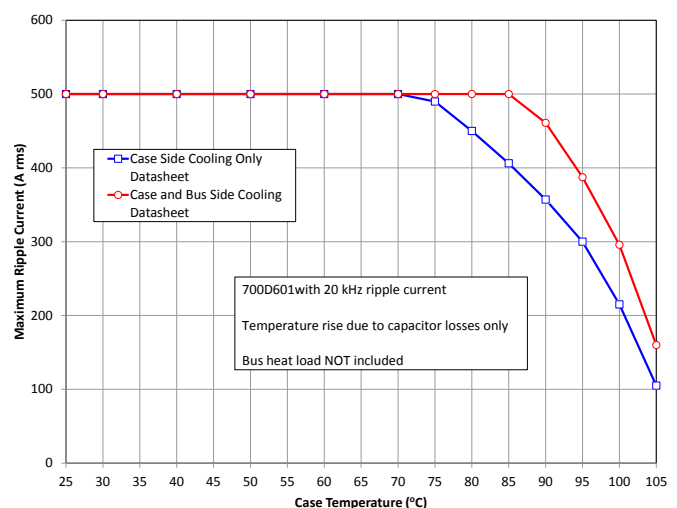

Advanced Conversion reserves the right to amend design data


Mechanical Specifications

Dimensions: See layout drawing for details
Terminals: Tin plated copper, 0.032" thick
Encapsulation: Molded polymeric case, potted with RTV silicone

Marking: APCS company identification
 700D601 Unique part number
 1600 μ F \pm 10% Capacitance value and tolerance
 450 Vdc DC voltage rating
 yyww-lot#-unit Serial number (date code, lot number, unit number)

Layout Details:

Contact Advanced Conversion to discuss your specific requirements.

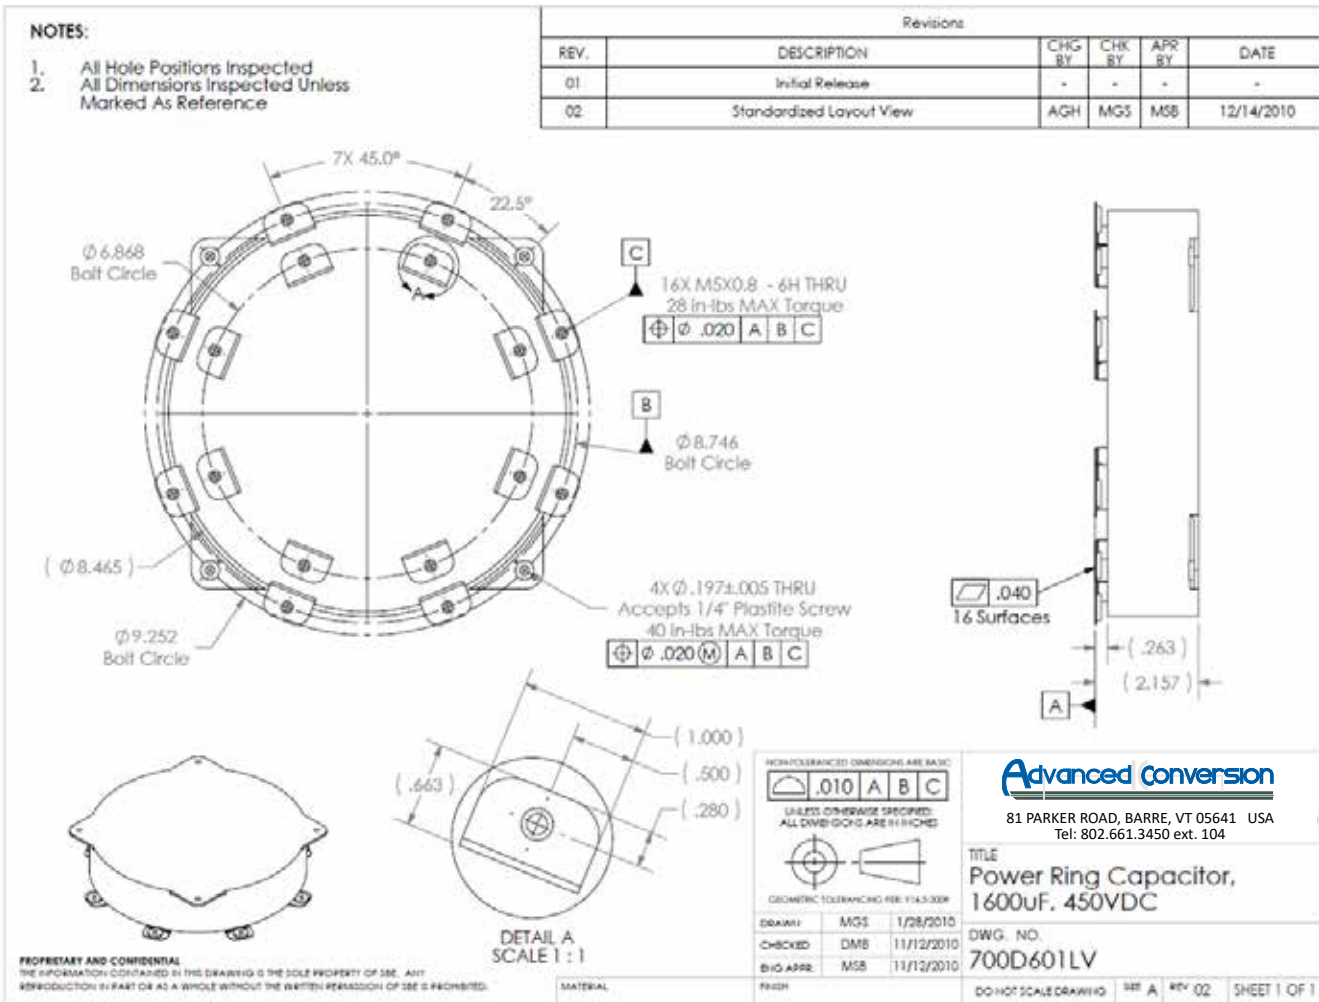

#700D601-03/21



Advanced Conversion reserves the right to amend design data