



American Opto Plus LED Corp.
0.40" SMD Type LED Display
SMA402YG-20 G/W
SMC402YG-20 G/W

● **EDIT HISTORY**

Version A: Mar. 01, 2013

Preliminary Spec.



American Opto Plus LED Corp.
0.40" SMD Type LED Display
SMA402YG-20 G/W
SMC402YG-20 G/W

● **FEATURES**

- 0.40 inch (10.16 mm) Digit Height.
- Low current operation.
- SMD type.
- Gray face, White segment.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The SMA402YG-20 G/W and SMC402YG-20 G/W are 0.40 inch (10.16 mm) height Dual digits display.

This device utilizes Super Bright Yellow Green LED chip which are made from AlGaInP on a transparent GaAs substrate.

The display has Gray face, White segment.

● **DEVICE**

PART NO	DESCRIPTION
SMA402YG-20 G/W	Common Anode
SMC402YG-20 G/W	Common Cathode

RoHS Compliance




Pb free.





American Opto Plus LED Corp.
0.40" SMD Type LED Display
SMA402YG-20 G/W
SMC402YG-20 G/W

● **MECHANICAL DIMENSIONS**

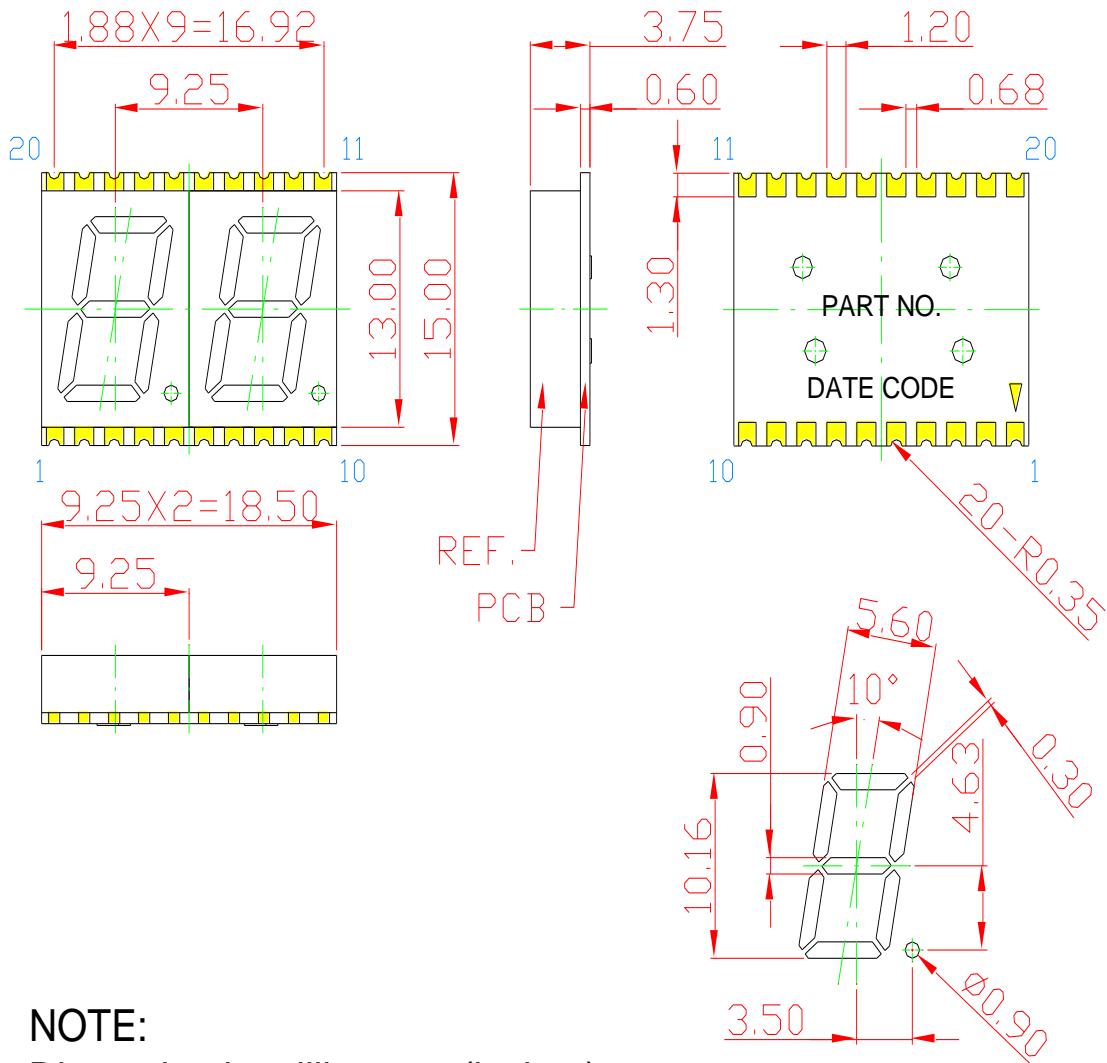

NOTE:
Dimension in millimeters (inches),
and tolerances are ± 0.25 mm (.01") specified.





American Opto Plus LED Corp.

0.40" SMD Type LED Display


SMA402YG-20 G/W

SMC402YG-20 G/W

● TYPICAL INTERNAL EQUIVALENT CIRCUIT

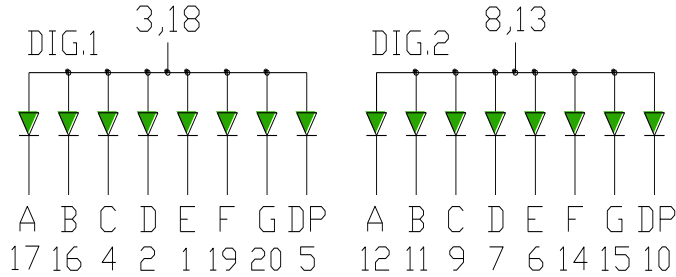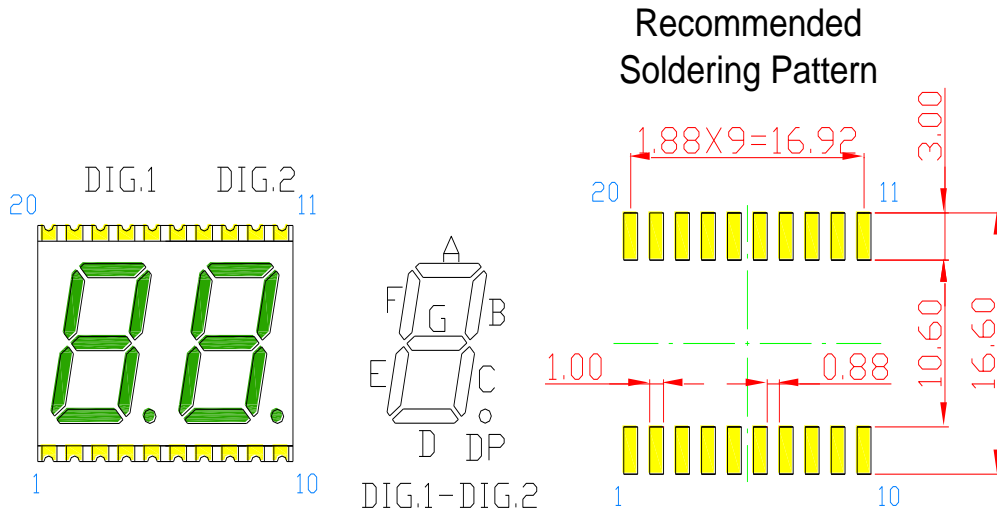

SMA402YG-20 G/W (Common Anode)

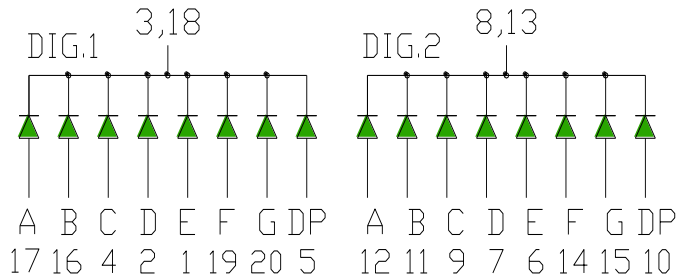

SMC402YG-20 G/W (Common Cathode)



American Opto Plus LED Corp.
0.40" SMD Type LED Display
SMA402YG-20 G/W
SMC402YG-20 G/W

● **YG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT $T_a=25^{\circ}\text{C}$

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P_{AD}	70	mW
Derating liner from 25°C	-	0.28	mA / $^{\circ}\text{C}$
Continuous forward current	I_{AF}	25	mA
Peak current (duty cycle 1/10, 1kHz)	I_{PF}	90	mA
Reverse voltage	V_R	5	V
Operating temperature	T_{OPR}	-40 to +105	$^{\circ}\text{C}$
Storage temperature	T_{STG}	-40 to +105	$^{\circ}\text{C}$

ELECTRICAL - OPTICAL CHARACTERISTICS AT $T_a=25^{\circ}\text{C}$

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V_F	$I_F=20\text{mA}$	-	2.1	2.6	V
Reverse Current, (Per Dice)	I_R	$V_R=5\text{V}$	-	-	10	μA
Peak Wavelength	λ_P	$I_F=20\text{mA}$	-	573	-	nm
Dominant Wavelength	λ_D	$I_F=20\text{mA}$	-	570	-	nm
Luminous Intensity	I_V	$I_F=20\text{mA}$	-	7	-	mcd
Spectral radiation bandwidth	$\Delta\lambda$	$I_F=20\text{mA}$	-	20	-	nm



American Opto Plus LED Corp.

0.40" SMD Type LED Display

SMA402YG-20 G/W

SMC402YG-20 G/W

● YG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

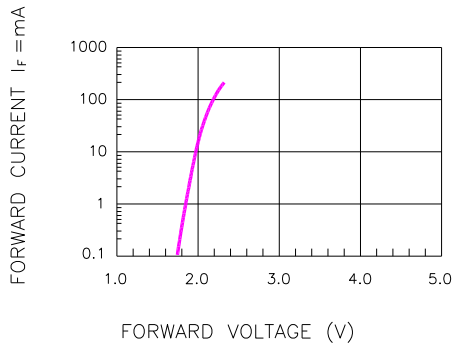


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

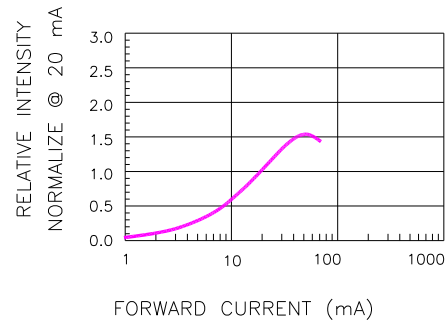


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

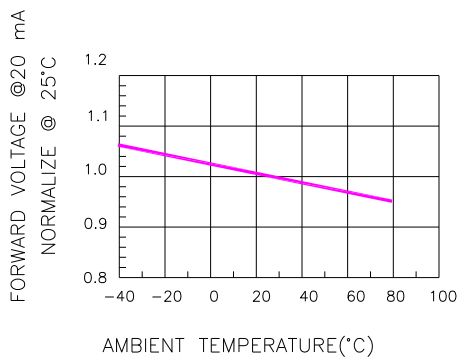


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

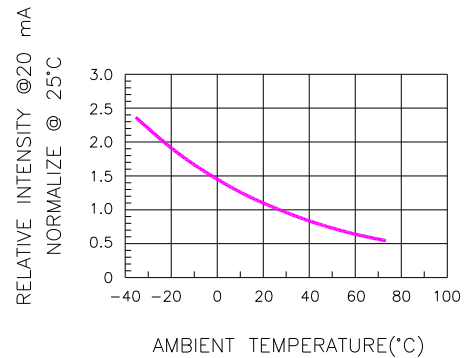


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

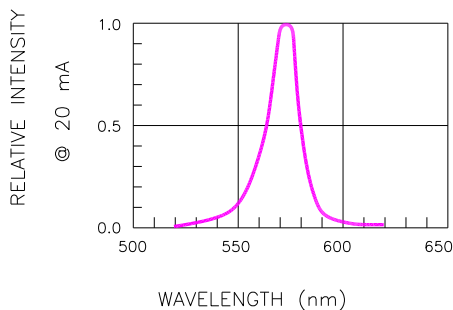


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH

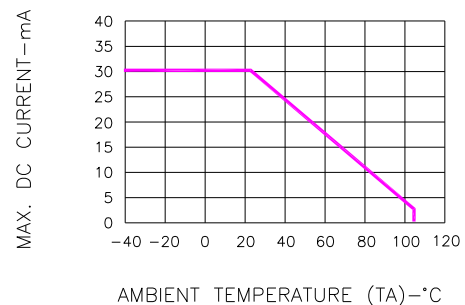


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE




American Opto Plus LED Corp.
0.40" SMD Type LED Display
SMA402YG-20 G/W
SMC402YG-20 G/W

● **RECOMMEND SOLDERING PROFILE**

SMT Soldering Profile

Pb free reflow soldering Profile

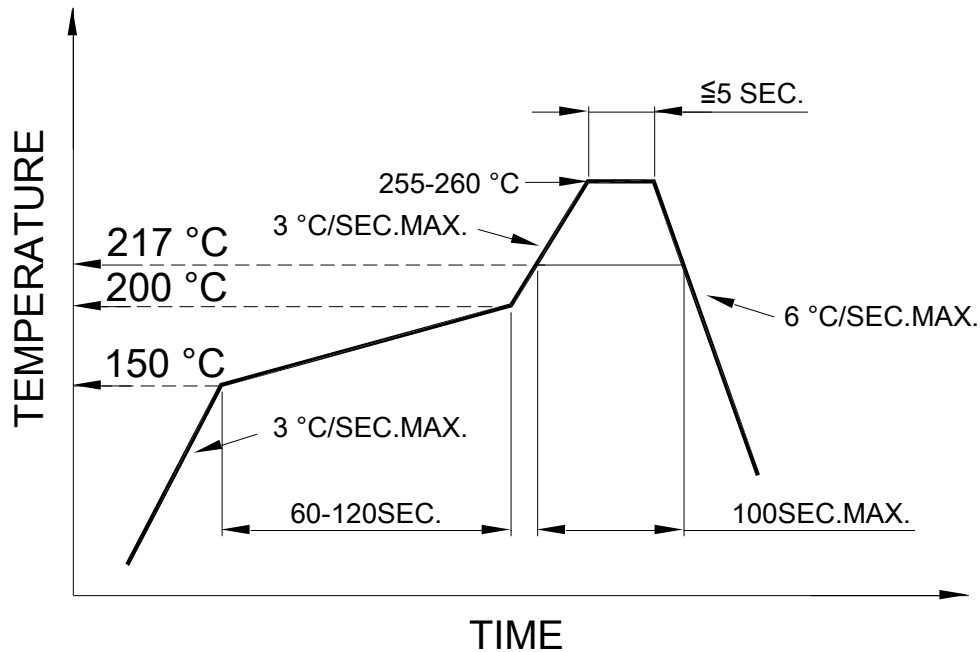

● **SOLDERING IRON**

Basic specification : ≤ 4 seconds when 260°C , If temperature is higher, time should be shorter ($+10^{\circ}\text{C} \rightarrow 1$ sec). Power dissipation of iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C .

● **REWORK**

Customer must finish rework within 3 sec. under 350°C .

The head of soldering iron cannot touch copper foil.