
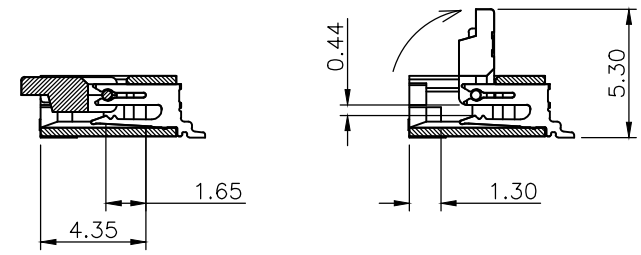
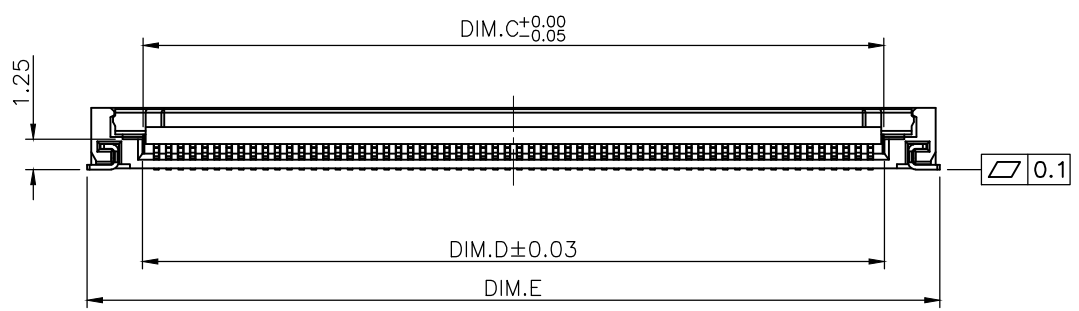
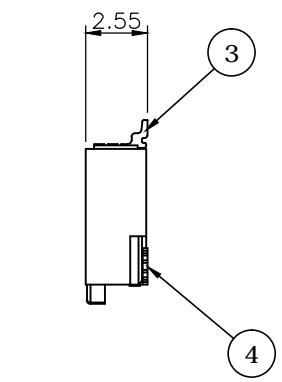


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Willis	2011/07/01
2	Revised frame, file name 314C-60BAA-R	Willis	2012/08/03
3	Add item, revised frame & file name 314C-XXBAA-R	Fros	2015/09/15

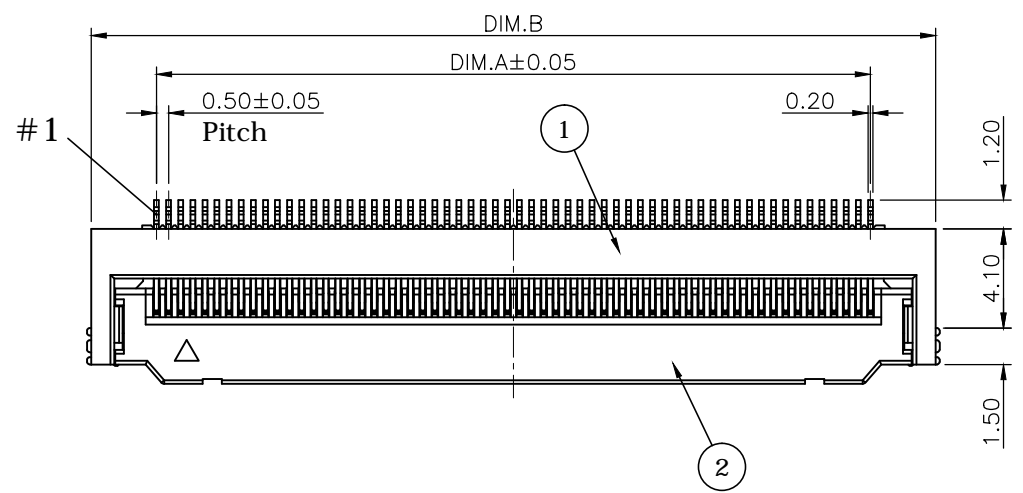

314C - XX B A A - R


Pin Count RoHS
Bottom Contact Reel Gold Flash Plated

PN TABLE	POS.	DIMENSION				
		A	B	C	D	E
314C-40BAA-R	40	19.50	24.90	20.60	20.65	25.23
314C-60BAA-R	60	29.50	34.90	30.60	30.65	35.23


4	HOLD DOWN	BRASS C2680R-H, 120u" TO 200u" MATTE-TIN OVER 50u" NICKEL PLATING
3	CONTACT	PHOSPHOR BRONZE C5191R-H, GOLD FLASH OVER 50u" TO 150u" NICKEL PLATING
2	SPACER	LCP, UL94V-0, NATURAL
1	INSULATOR	LCP, UL94V-0, NATURAL
NO.	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE


UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°


 **ATTEND**

WWW.ATTEND.COM.TW


DRAWN	Willis	2012/08/03	DRAWN NAME:	FPC Connector Horizontal Flip Type
CHECKED	Angel	2012/08/03		0.5mm Pitch, H:2.5mm, Lock Type
APPROVED	Ken	2012/08/03	PRODUCT NO.	SEE PN TABLE
	SCALE 3.2	SHEET 1/2	SIZE A4	FILE NAME 314C-XXBAA-R_B_3

REV.	DESCRIPTION	DRAWN	DATE
	SEE SHEET ONE		

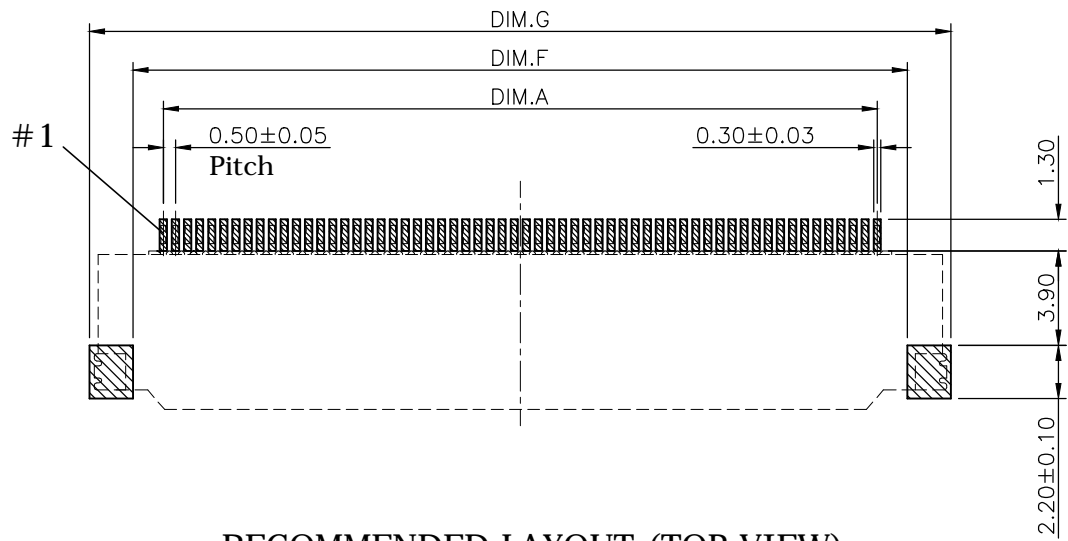

 PAD
 Connector

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ±0.05mm

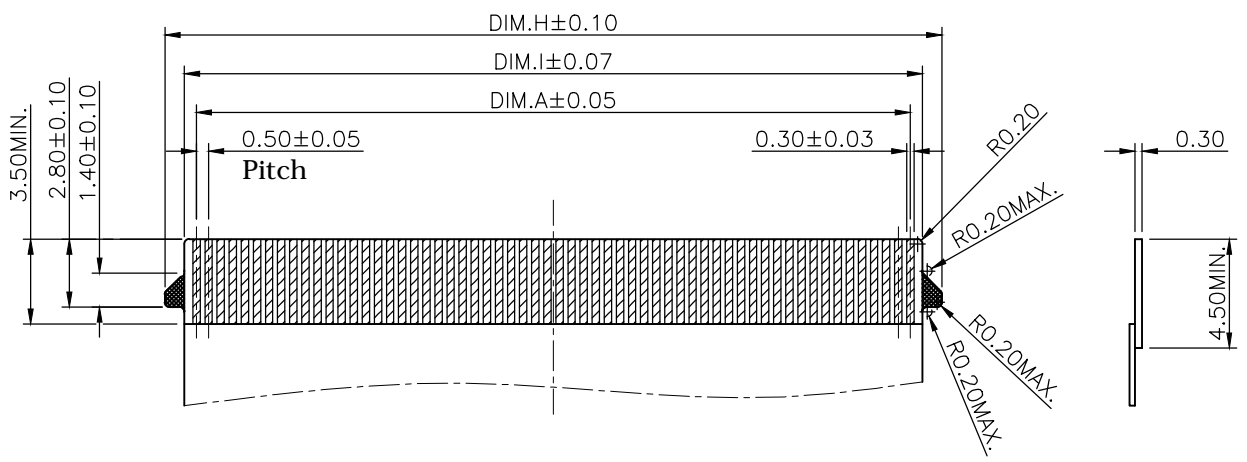


FPC LAYOUT

POS.	DIMENSION				
	A	F	G	H	I
40	19.50	22.00	25.60	22.10	20.50
60	29.50	32.00	35.60	32.10	30.50

UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



WWW.ATTEND.COM.TW

DRAWN	Willis	2012/08/03	DRAWN NAME:	FPC Connector Horizontal Flip Type
CHECKED	Angel	2012/08/03		0.5mm Pitch, H:2.5mm, Lock Type
APPROVED	Ken	2012/08/03	PRODUCT NO.	SEE PN TABLE
	SCALE 3.2	SHEET 2/2	SIZE A4	FILE NAME 314C-XXBAA-R_B_3