

BOURNS®

Features

- Multiturn / Cermet / Sealed
- [Listed on the QPL](#) per MIL-R-22097
- [Panel mount option](#) available



Model RJ22 is currently available, although not recommended for new designs.

RJ22 - 1/2 " Square Trimming Potentiometer

Electrical Characteristics

Standard Resistance Range10 ohms to 1 megohm
 (see standard resistance table)
 Resistance Tolerance±10 % std.
 Absolute Minimum Resistance1 ohm max.
 Contact Resistance Variation (whichever is greater)
2 % or 2 ohms max.
 Adjustability
 Voltage.....±0.01 %
 Resistance.....±0.05 %
 Resolution.....Infinite
 Insulation Resistance500 vdc.
 1,000 megohms min.
 Dielectric Strength
 Sea Level.....1,000 vac
 80,000 Feet.....400 vac
 Effective Travel.....25 turns nom.

Environmental Characteristics

Power Rating @ 85 °C (400 volts max.)0.50 watt
 Power Rating @ 150 °C.....0 watt
 Temperature Range-65 °C to +150 °C
 Temperature Coefficient±100 ppm/°C
 Seal Test85 °C Fluorinert* (pin styles only)
 HumidityMIL-STD-202 Method 106
 (1 % ΔTR; 10 Megohms IR)
 Vibration.....20 G (1 % ΔTR; 1 % ΔVR)
 Shock.....100 G (1 % ΔTR; 1 % ΔVR)
 Load Life1,000 hours 0.5 watt @ 85 °C
 (2 % ΔTR; 1 % ΔVR)
 Rotational Life.....200 cycles
 2 % ΔTR

Physical Characteristics

Torque.....5.0 oz-in. max.
 Mechanical Stops.....Wiper idles
 Terminals.....MIL-STD-202; Method 208
 Flexible leads(7 strands of 30 AWG)
 Weight0.065 oz.
 Wiper.....50 % (Actual TR) ±10 %
 FlammabilityU.L. 94V-0


Machine Screw Mounting

Torque.....12 oz-in. max.
 Marking.....Mil-spec part number
 Standard Packaging
 X, P & W Styles25 pcs. per tube
 L Style25 pcs. per bag
 Adjustment ToolH-90


Product Dimensions

RJ22FP


Common Dimensions (Pin Styles)

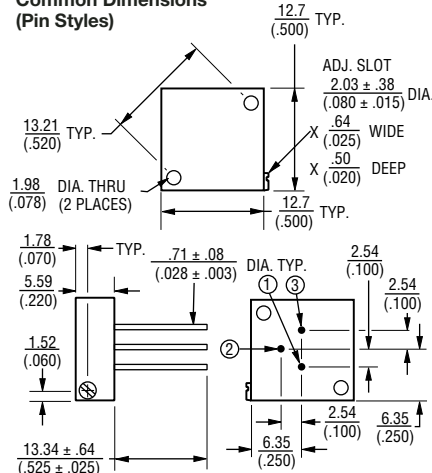


RJ22FW

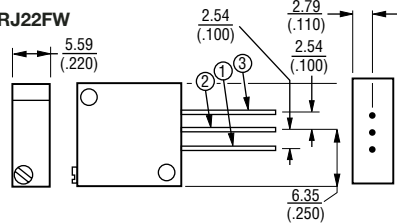

RJ22FL

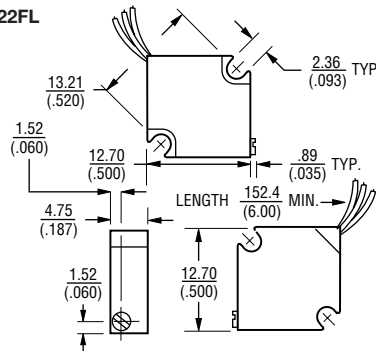

RJ22FX

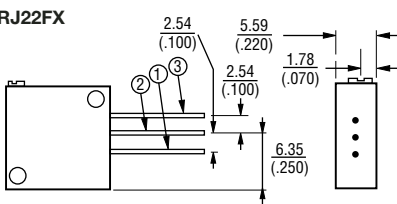

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE: $\frac{\text{MM}}{\text{(INCHES)}}$

How To Order

MIL-PRF-22097 RJ22 F W 103

Model _____
 Characteristic _____
 F = ±100 ppm/°C Temp. Coeff. Max.
 Terminal Style _____
 Resistance Code _____

Standard Resistance Table

Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
250,000	254
500,000	504
1,000,000	105

