


## 2N7002T-HF

**N-Channel**  
**RoHS Device**  
**Halogen Free**



### Features



- High density cell design for low  $R_{DS(ON)}$
- Voltage controlled small signal switch
- Rugged and reliable
- High saturation current capability

### Mechanical data

- Case: SOT-523, molded plastic.
- Terminals: Solderable per MIL-STD-750, method 2026.
- Weight: 0.002 grams(Approx.)

### Circuit diagram

- 1. Gate
- 2. Source
- 3. Drain

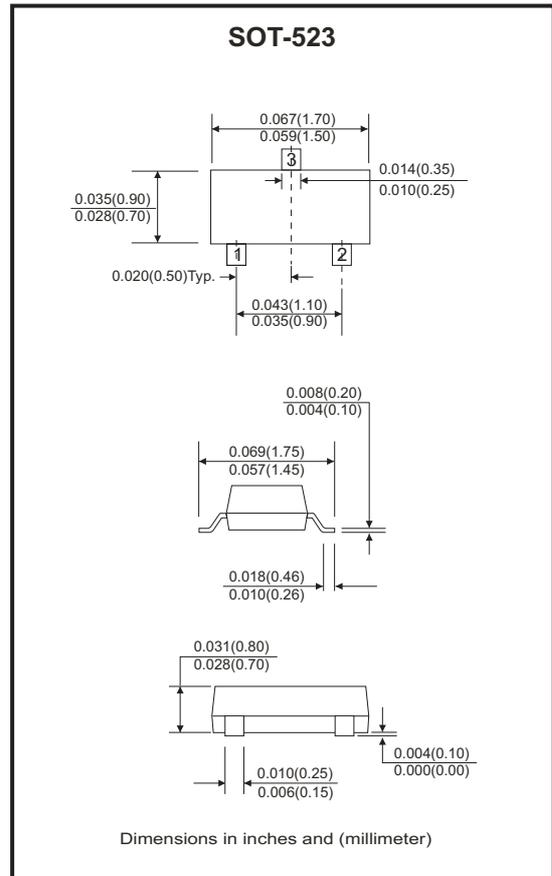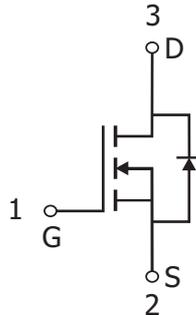

### Maximum Ratings (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-source voltage	$V_{DS}$	60	V
Gate-source voltage	$V_{GS}$	$\pm 20$	V
Drain current	$I_D$	115	mA
Power dissipation	$P_D$	150	mW
Thermal resistance from junction to ambient	$R_{\theta JA}$	833	$^\circ\text{C/W}$
Junction temperature range	$T_J$	150	$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

## Electrical Characteristics (at TA=25 °C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	60			V
Gate-threshold voltage	$V_{th(GS)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1		2.5	
Gate-body leakage	$I_{GSS}$	$V_{DS} = 0V, V_{GS} = \pm 20V$			$\pm 80$	nA
Zero gate voltage drain current	$I_{DSS}$	$V_{DS} = 60V, V_{GS} = 0V$			80	nA
On-state drain current	$I_{D(ON)}$	$V_{GS} = 10V, V_{DS} = 7V$	500			mA
Drain-source on-resistance	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 500mA$			5	$\Omega$
		$V_{GS} = 5V, I_D = 50mA$			7	
Forward trans conductance	$g_{fs}$	$V_{DS} = 10V, I_D = 200mA$	80			ms
Drain-source on-voltage	$V_{DS(on)}$	$V_{GS} = 10V, I_D = 500mA$			3.75	V
		$V_{GS} = 5V, I_D = 50mA$			0.375	V
Diode forward voltage	$V_{SD}$	$I_S = 115mA, V_{GS} = 0V$	0.55		1.2	V
Input capacitance	$C_{iss}$	$V_{DS} = 25V, V_{GS} = 0V, f = 1MHz$			50	pF
Output capacitance	$C_{oss}$				25	
Reverse transfer capacitance	$C_{rss}$				5	

## SWITCHING TIME

Turn-on time	$t_{d(on)}$	$V_{DD} = 25V, R_L = 50\Omega$ $I_D = 500mA, V_{GEN} = 10V$ $R_G = 25\Omega$			20	nS
Turn-off time	$t_{d(off)}$				40	

## RATING AND TYPICAL CHARACTERISTIC CURVES ( 2N7002T-HF )

Fig.1 - Output Characteristics

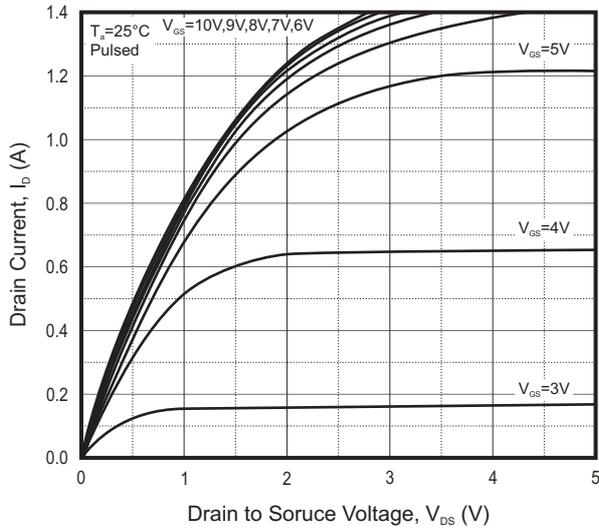


Fig.2 - Transfer Characteristics

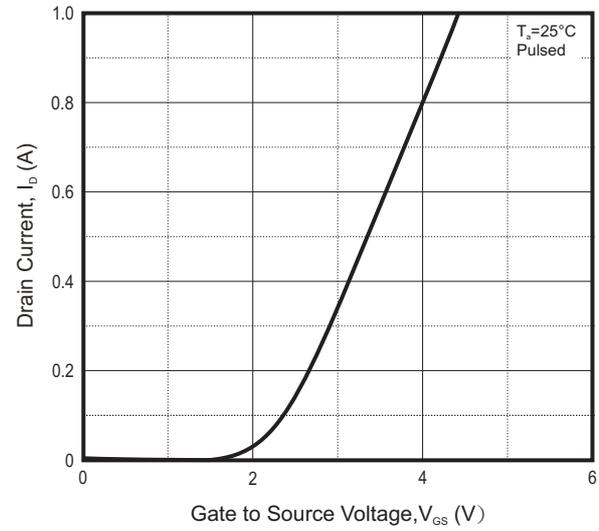


Fig.3 -  $R_{DS(ON)} - I_D$

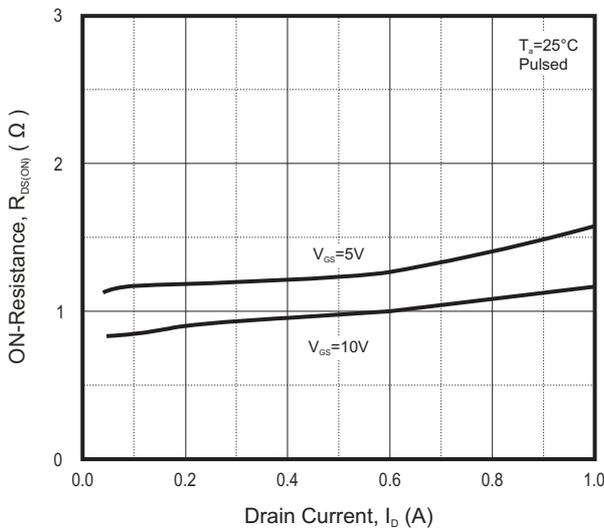


Fig.4 -  $R_{DS(ON)} - V_{GS}$






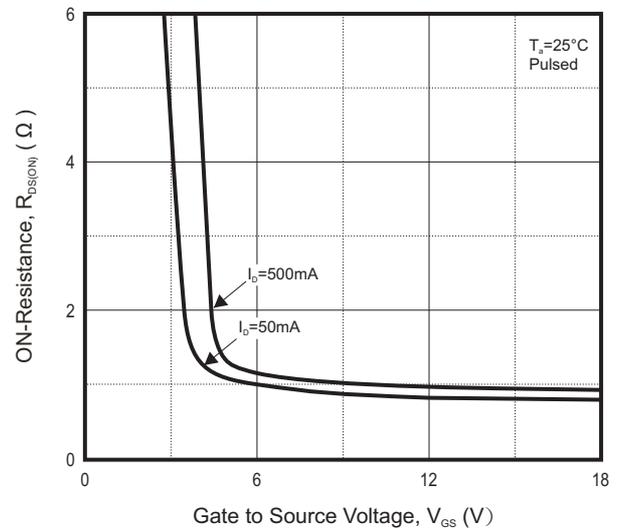


Fig.5 -  $I_S - V_{SD}$

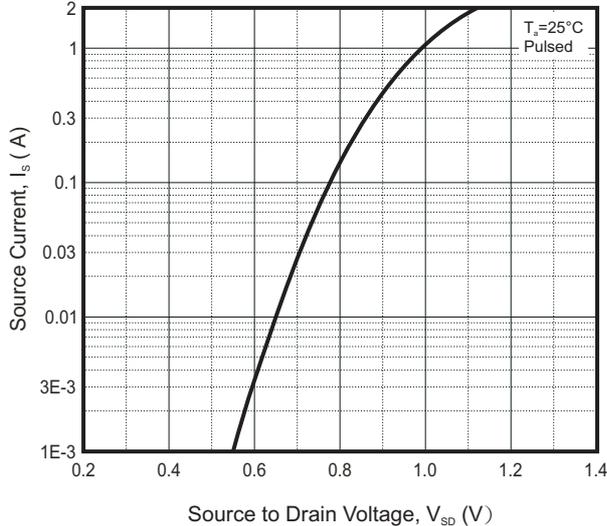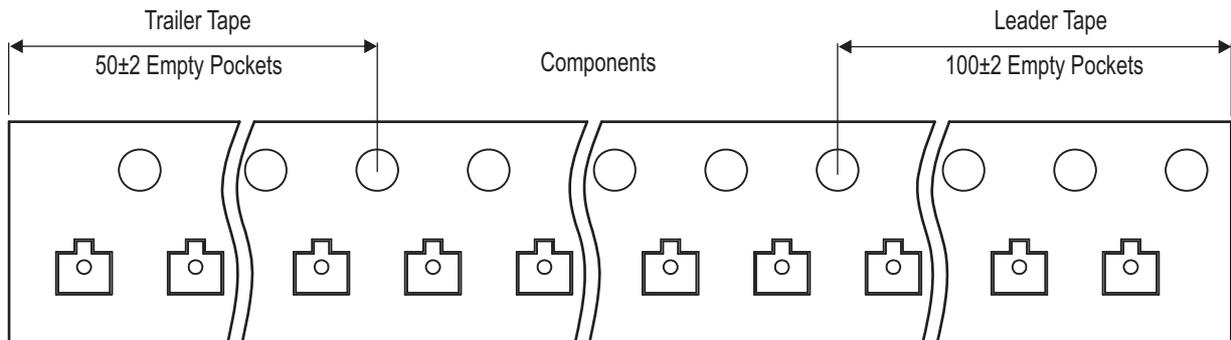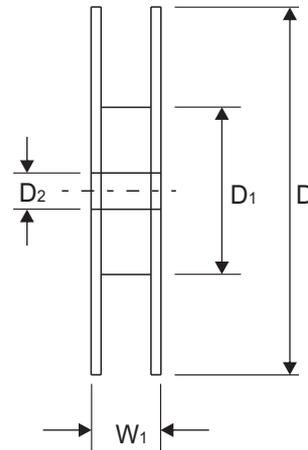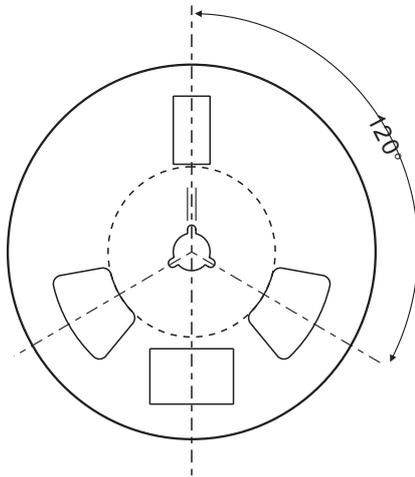

Reel Taping Specification

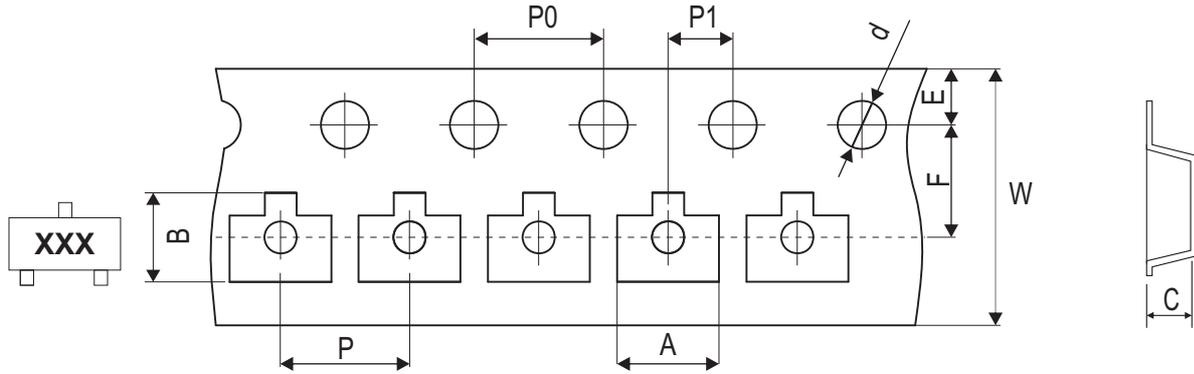

SOT-523	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	1.85 ± 0.05	1.85 ± 0.05	0.875 ± 0.05	1.50 ± 0.10	178.00 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.073 ± 0.002	0.073 ± 0.002	0.034 ± 0.002	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039


SOT-523	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 ± 0.30 / - 0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 ± 0.012 / - 0.004	0.484 ± 0.039

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

## Marking Code


Part Number	Marking Code
2N7002T-HF	K72

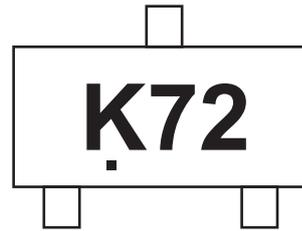

Solid dot = Pin 1 indicator

## Suggested PAD Layout

SIZE	SOT-523	
	(mm)	(inch)
A	0.60	0.024
B	0.50	0.020
C	0.40	0.016
D	1.00	0.039
E	1.24	0.049
F	1.84	0.072

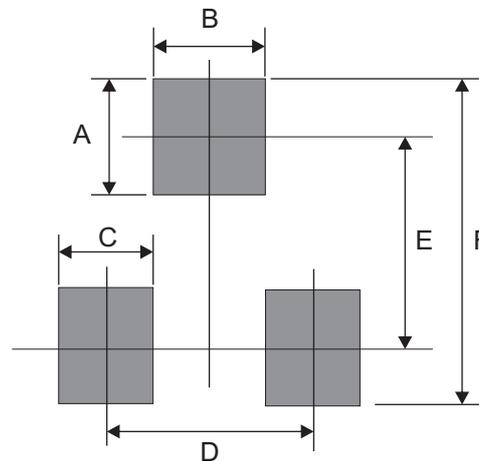

## Standard Packaging

Case Type	REEL PACK	
	REEL ( pcs )	Reel Size (inch)
SOT-523	3,000	7