



2N3906A-G (PNP) RoHS Device



Features

- PNP silicon epitaxial planar transistor for switching and amplifier application.
- As complementary type, the NPN transistor 2N3904A-G is recommended.

Circuit Diagram

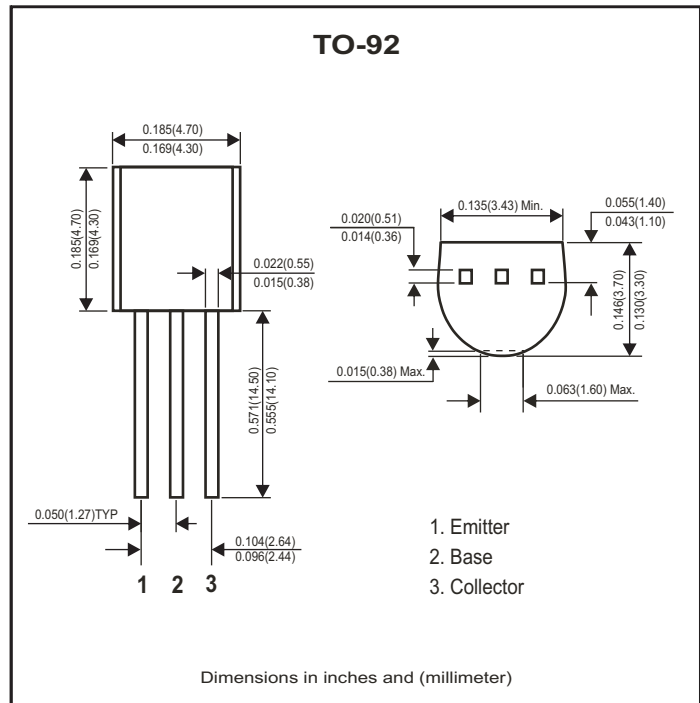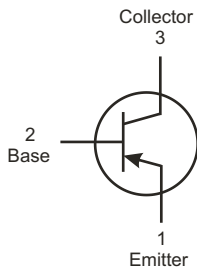

Maximum Ratings (at TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-base voltage	V _{CB0}	-40	V
Collector-emitter voltage	V _{CEO}	-40	V
Emitter-base voltage	V _{EB0}	-5	V
Collector current-continuous	I _c	-0.2	A
Collector power dissipation	P _c	0.625	W
Junction temperature	T _J	+150	°C
Storage temperature range	T _{STG}	-55 ~ +150	°C

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Max	Unit
Collector-base breakdown voltage	$I_C = -10\mu A, I_E = 0$	$V_{(BR)CBO}$	-40		V
Collector-emitter breakdown voltage	$I_C = -1mA, I_B = 0$	$V_{(BR)CEO}$	-40		V
Emitter-base breakdown voltage	$I_E = -10\mu A, I_C = 0$	$V_{(BR)EBO}$	-5		V
Collector-base cut-off current	$V_{CB} = -40V, I_E = 0$	I_{CBO}		-0.1	μA
Collector-emitter cut-off current	$V_{CE} = -30V, V_{BE(off)} = -3V$	I_{CEX}		-50	nA
Emitter cut-off current	$V_{EB} = -5V, I_C = 0$	I_{EBO}		-0.1	μA
DC current gain	$V_{CE} = -1V, I_C = -10mA$	$h_{FE(1)}$	200	300	
	$V_{CE} = -1V, I_C = -50mA$	$h_{FE(2)}$	60		
	$V_{CE} = -1V, I_C = -100mA$	$h_{FE(3)}$	30		
Collector-emitter saturation voltage	$I_C = -50mA, I_B = -5mA$	$V_{CE(sat)}$		-0.4	V
Base-emitter saturation voltage	$I_C = -50mA, I_B = -5mA$	$V_{BE(sat)}$		-0.95	V
Transition frequency	$V_{CE} = -20V, I_C = -10mA$ $f = 100MHz$	f_T	250		MHz
Delay time	$V_{CC} = -3V, V_{BE} = -0.5V$	t_d		35	nS
Rise time	$I_C = -10mA, I_{B1} = -1mA$	t_r		35	nS
Storage time	$V_{CC} = -3V, I_C = -10mA$	t_s		225	nS
Fall time	$I_{B1} = I_{B2} = -1mA$	t_f		75	nS

RATING AND CHARACTERISTIC CURVES (2N3906A-G)

Fig.1 - Static Characteristic


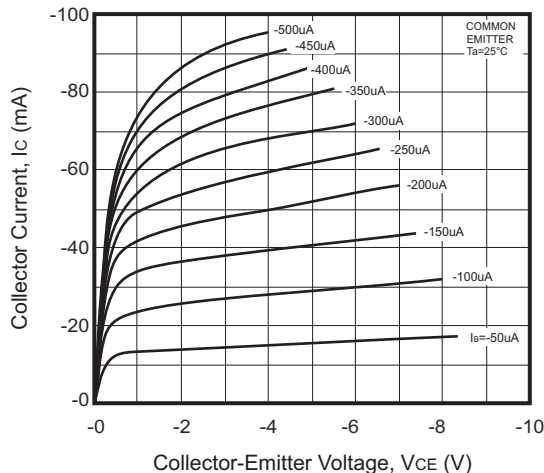


Fig.2 - $h_{FE} - I_C$

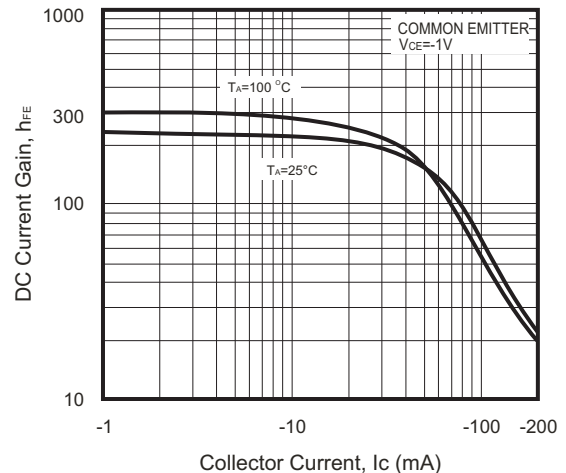

RATING AND CHARACTERISTIC CURVES (2N3906A-G)

Fig.3 - $V_{CEsat} - I_c$

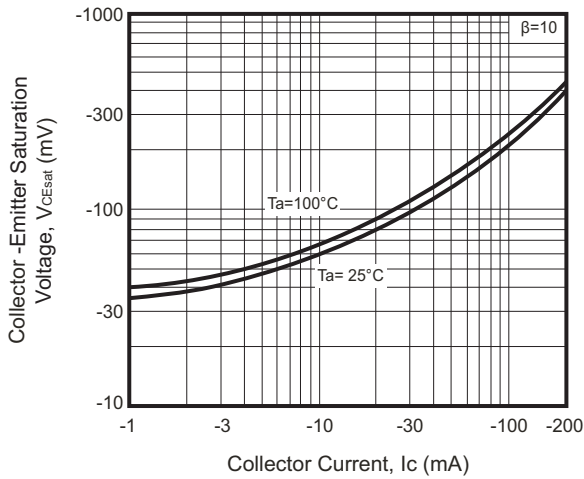


Fig.4 - $V_{BEsat} - I_c$

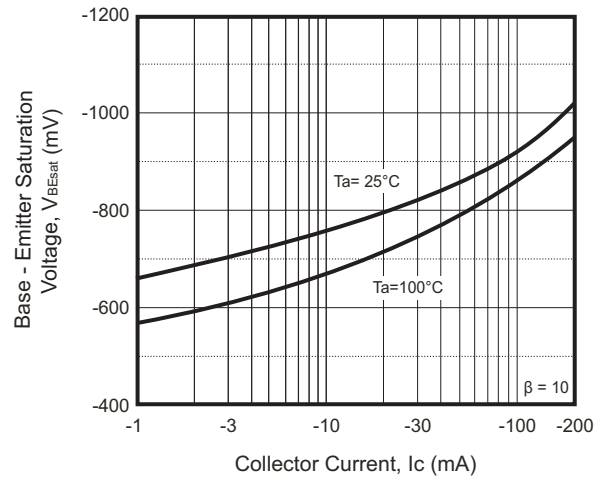


Fig.5 - $I_c - V_{BE}$

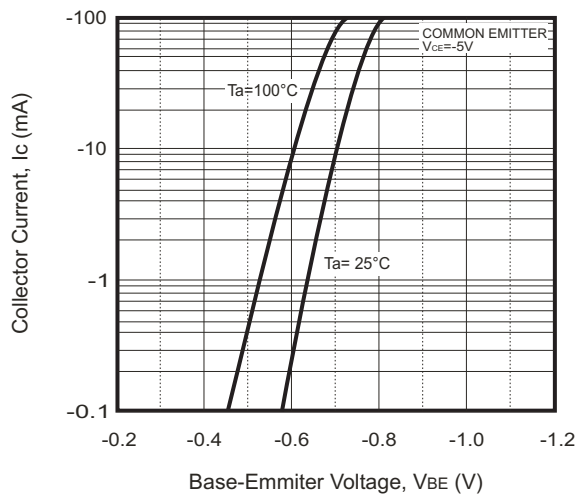


Fig.6 - $C_{ob}/C_{ib} - V_{CB}/V_{EB}$

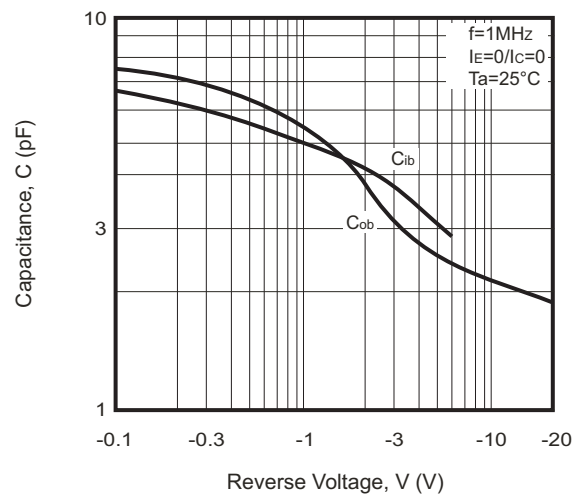


Fig.7 - $f_T - I_c$



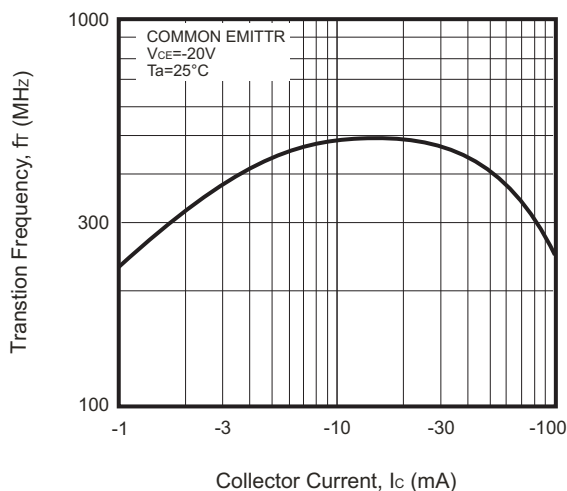


Fig.8 - $P_c - T_a$

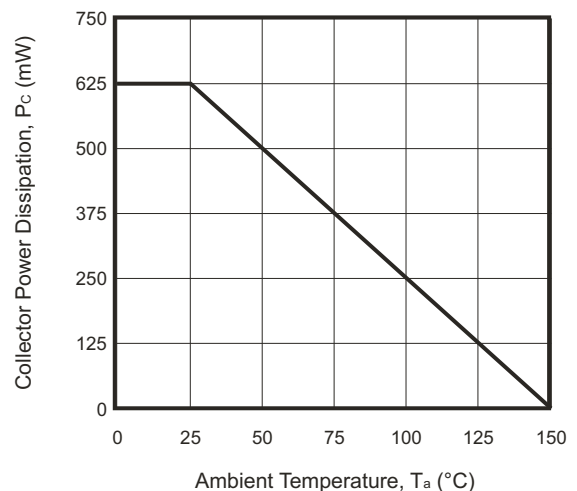


Marking Code

Part Number	Marking Code
2N3906A-G	2N3906

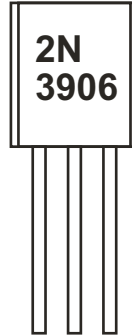

Suggested PAD Layout

SIZE	TO-92	
	(mm)	(inch)
A	0.80	0.031
B	0.70	0.028
C	1.27	0.050

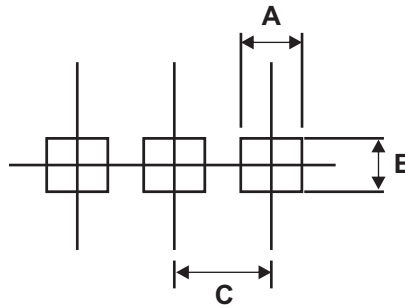

Standard Packaging

Case Type	BULK PACK	
	BAG (pcs)	BOX (pcs)
TO-92	1,000	10,000