


CDBHD220-G Thru. CDBHD2100-G

Reverse Voltage: 20 to 100 Volts

Forward Current: 2.0 Amp

RoHS Device




Features

- Schottky barrier chips in TO-269AA bridge.
- Metal semiconductor junction with guard ring.
- Silicon epitaxial planar chips.
- Very low forward drop down voltage.
- For use in low voltage, high efficiency inverters, free wheeling, and polarity protection applications.
- Lead-free parts meet RoHS requirements.
- UL recognized file # E321971

Mechanical data

- Case: TO-269AA, molded plastic.
- Terminals: solderable per MIL-STD-750, method 2026.
- Polarity: Marked on body.
- Mounting Position: Any.
- Weight: 0.13 gram (approx.).

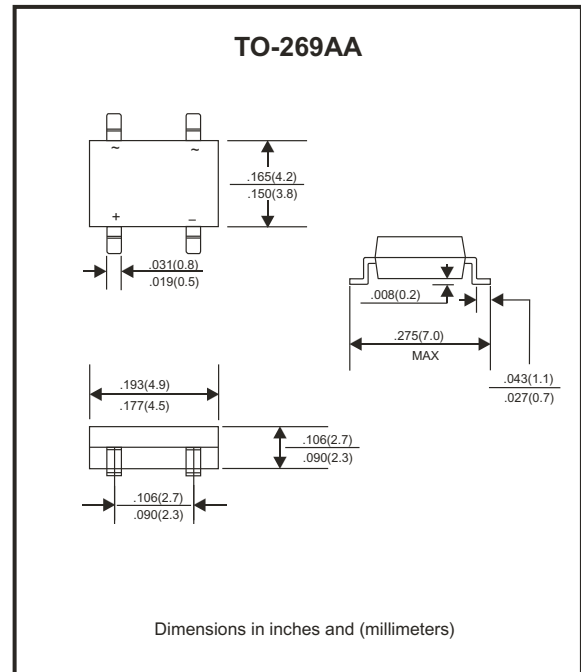

Maximum Ratings and Electrical Characteristics

Parameter	Conditions	Symbol	CDBHD 220-G	CDBHD 240-G	CDBHD 260-G	CDBHD 280-G	CDBHD 2100-G	Units
Max. repetitive peak reverse voltage		V _{RRM}	20	40	60	80	100	V
Max. DC blocking voltage		V _{RMS}	14	28	42	56	70	V
Max. RMS voltage		V _R	20	40	60	80	100	V
Max. Instantaneous forward voltage at 2.0A		V _F	0.5		0.70	0.85		V
Average Forward rectified current	2.0X2.0"(5.0x5.0mm) copper pad, See fig.1	I _{AV}	2.0					A
Peak Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC methode)	I _{FSM}	50					A
Reverse current	V _R =V _{RRM} T _A =25°C	I _R	0.5					mA
	V _R =V _{RRM} T _A =100°C		20					
Thermal resistance	Junction to ambient	R _{θJA}	85					°C/W
	Junction to lead	R _{θJL}	20					
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	C _J	150					pF
Operating junction temperature		T _J	-55 to +125			-55 to +150		°C
Sorage temperature		T _{STG}	-65 to +175					°C

Company reserves the right to improve product design, functions and reliability without notice.

RATING AND CHARACTERISTIC CURVES (CDBHD220-G Thru. CDBHD2100-G)

Fig.1 - Forward Current Derating Curve

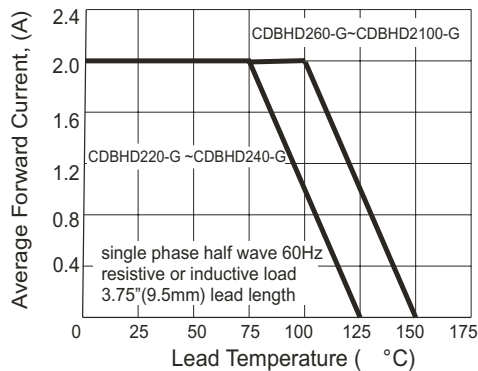


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

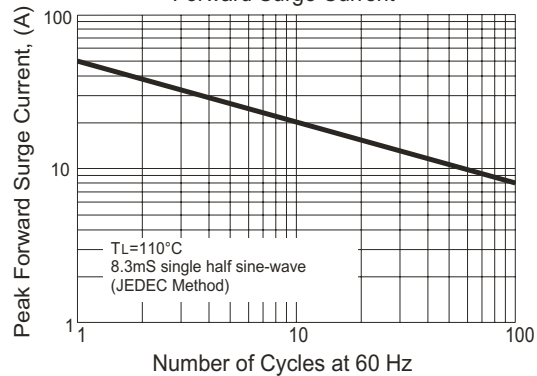


Fig. 3 - Typical Instantaneous Forward Characteristics

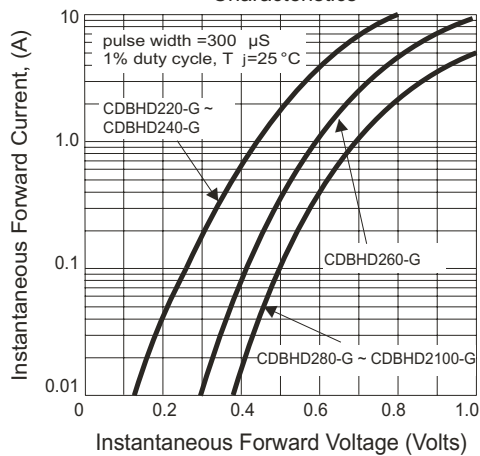


Fig. 4A - Typical Reverse Characteristics

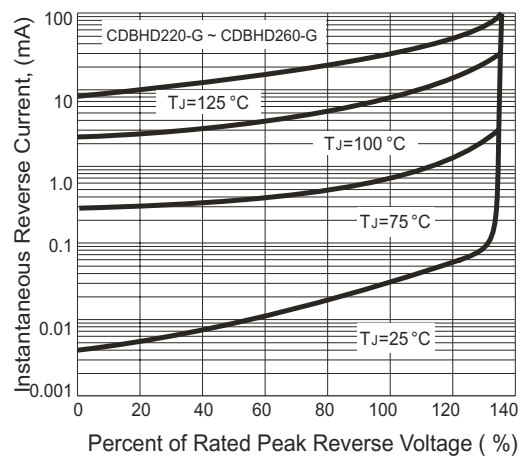


Fig. 5 - Typical Junction Capacitance



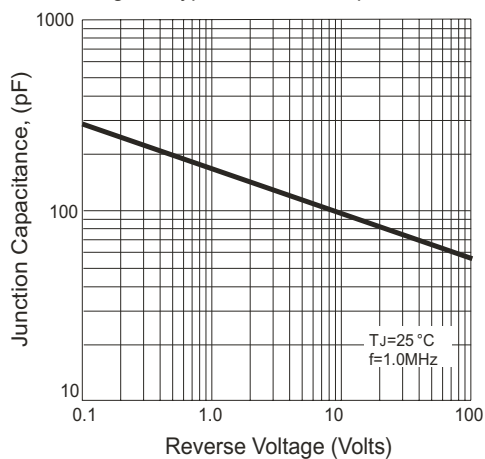


Fig. 4B - Typical Reverse Characteristics

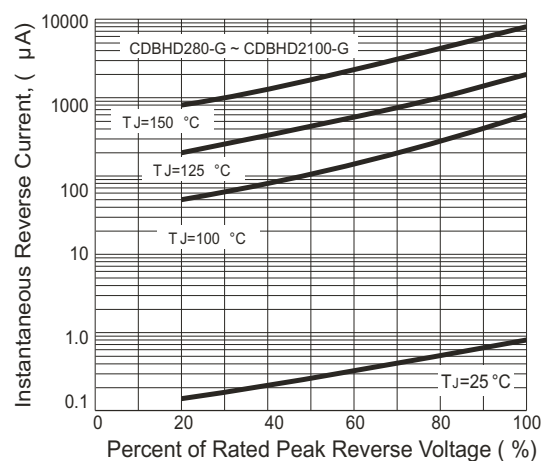

Reel Taping Specification

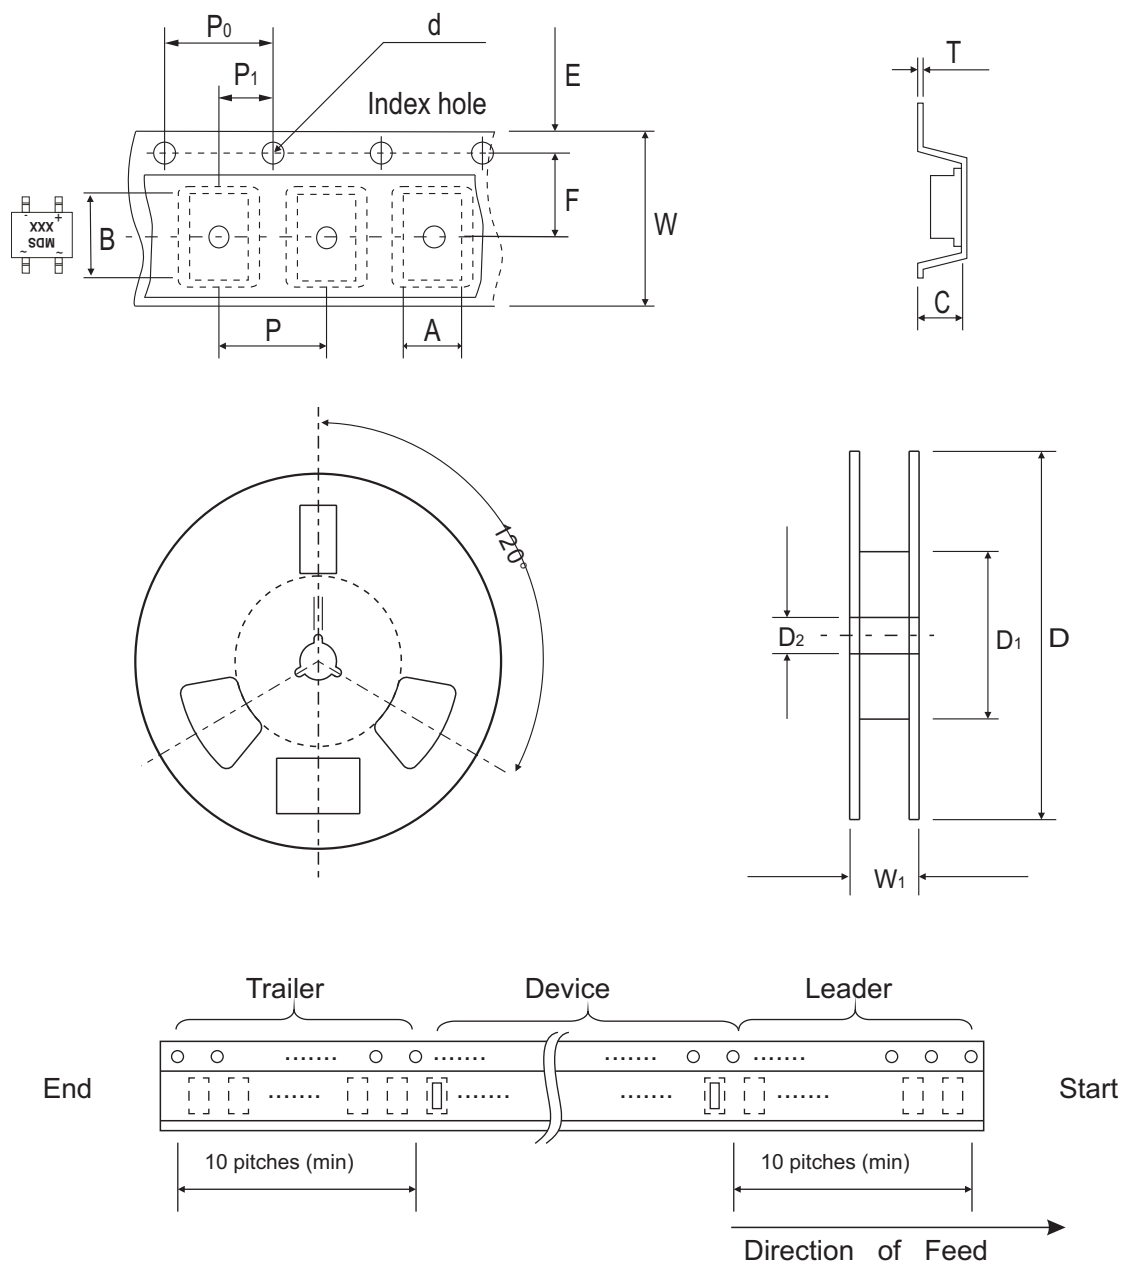


TO-269AA	SYMBOL	A	B	C	d	D	D ₁	D ₂
	(mm)	5.00 ± 0.10	3.20 ± 0.10	2.90 ± 0.10	1.55 ± 0.10	330 ± 1.00	50.0 MIN.	13.0 ± 0.20
	(inch)	0.197 ± 0.004	0.126 ± 0.004	0.114 ± 0.004	0.0610 ± 0.004	12.992 ± 0.039	1.969 MIN.	0.512 ± 0.008

TO-269AA	SYMBOL	E	F	P	P ₀	P ₁	W	W ₁
	(mm)	1.75 ± 0.10	5.50 ± 0.05	8.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	12.00 ± 0.20	18.40 MAX.
	(inch)	0.069 ± 0.004	0.217 ± 0.002	0.315 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.472 ± 0.008	0.724 MAX.

Marking Code


Part Number	Marking Code
CDBHD220-G	MDS22
CDBHD240-G	MDS24
CDBHD260-G	MDS26
CDBHD280-G	MDS28
CDBHD2100-G	MDS210



xxx = Product type marking code

Suggested PAD Layout

SIZE	TO-269AA	
	(mm)	(inch)
A	0.58	0.023
B	0.76	0.030
C	1.78	0.070
D	5.75	0.226

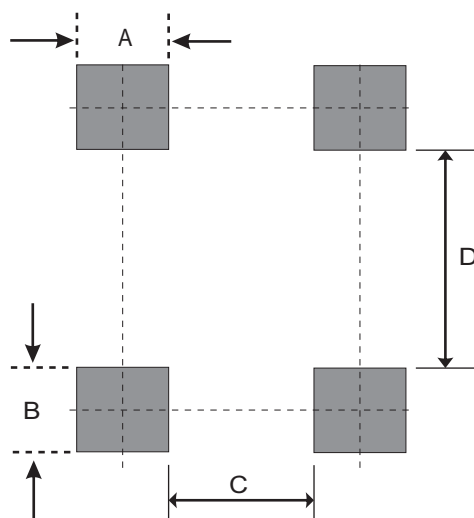

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
TO-269AA	2,500	13