




# MSV series MSV-200



## Valve Regulated Lead Acid Battery


Maintenance-Free Sealed Lead Acid Battery.  
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

### General Design for Standby Power Applications

<b>【Design Life】</b> Up to 15 Years in Standby Service at 25°C Eurobat (20°C) : >12 YEARS VERY LONG LIFE <b>【Operating Temperature Range】</b> Nominal Operating Temperature : 25°C (77°F) Discharge : -15°C ~ 50°C (5°F~122°F) Charge: -15°C ~ 40°C (5°F~104°F) Storage: -15°C ~ 40°C (5°F~104°F)	<b>【Float Charging Voltage】</b> 2.21 ~ 2.25 VDC/Unit at 25°C (77°F) <b>【Equalization Charging Voltage】</b> 2.35 VDC/Unit at 25°C (77°F) <b>【Self Discharge】</b> Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).
--	---

### Specification

Nominal Voltage	2V (single cell per unit)		
Nominal Capacity	200 Ah @10hr-rate to 1.80V per cell @25°C (77°F)		
Weight	Approx. 13.60 Kg (29.97 lbs)		
Maximum Discharge Current	1200 A (5sec)		
Internal Resistance	Approx. 0.59 mΩ		
Short Circuit Current	2968A		
Maximum Charge Current	60 A		
Terminal types	I4 thread copper alloy terminal to accept M8 bolt		
Terminal tightening torque	126±25 Kgf·cm / 109±22 Lbf·in / 12.3±2.5 N·m		
Container Material	Flame Retardant ABS (UL 94-V0)		
Dimensions	Length (L)	170.0±2.0 mm	6.69±0.08 inch
	Width (W)	106.0±1.5 mm	4.17±0.06 inch
	Container height (h)	331.0±2.5 mm	13.03±0.10
	Overall Height (H)	339.0±2.5 mm	13.15±0.10 inch

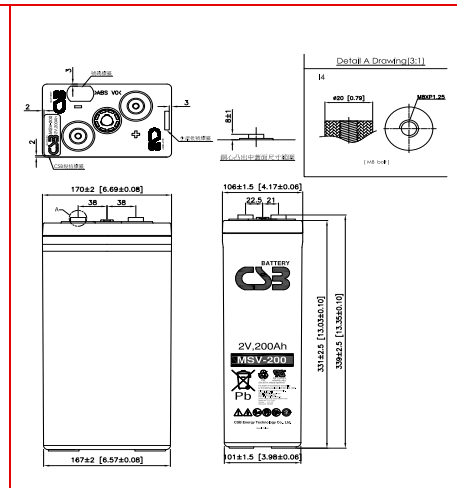

### Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	2HR	2.5HR	3HR	5HR	6HR	8HR	10HR	20HR	24HR
1.60V	285	196	130	76.5	65.4	57.5	38.5	33.5	26.5	22.5	11.3	9.38
1.67V	260	187	124	74.0	62.5	54.5	37.0	32.0	26.0	22.0	11.0	9.17
1.70V	241	182	122	72.5	61.6	54.0	36.5	31.5	25.5	21.5	10.8	8.96
1.75V	210	168	112	68.5	57.9	50.5	34.5	30.0	24.5	20.5	10.3	8.54
1.80V	183	147	106	66.0	55.7	48.5	33.5	29.5	24.0	20.0	10.0	8.33
1.83V	159	130	97.5	62.0	52.9	46.5	32.0	28.0	22.8	19.5	9.75	8.13

### Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	2HR	2.5HR	3HR	5HR	6HR	8HR	10HR	20HR	24HR
1.60V	466	344	231	139	118	104	70.5	62.0	50.0	42.0	21.0	17.5
1.67V	427	330	230	138	117	103	70.0	61.5	49.5	41.5	20.8	17.3
1.70V	407	319	223	135	115	101	69.5	60.5	48.5	41.0	20.5	17.1
1.75V	368	298	208	129	110	96.5	66.5	58.0	47.5	40.0	20.0	16.7
1.80V	336	267	196	124	106	92.5	64.5	56.5	46.0	39.5	19.8	16.5
1.83V	286	231	181	116	100	88.5	61.5	54.0	44.0	38.0	19.0	15.8

Please refer to the official site for the latest rating confirmation. URL: [www.csb-battery.com](http://www.csb-battery.com)

Issued: 201112

### Sales Offices

希世比能源科技股份有限公司  
CSB Energy Technology Co., Ltd.

#### BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600  
Fax: +886-2-2888-3300

#### USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)  
Fax: +1-817-244-4445

#### SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075  
Fax: +86-755-8831-6548

#### EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140  
Fax: +31(0)180-418-327

#### SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094  
Fax: +86-21-5046-1046

Recognized under UL 1989,  
and certified by ISO 9001, 14001, 45001, 50001.



#### TAIPEI OFFICE

Tel: +886-2-2880-5600  
Fax: +866-2-2888-3300

#### BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265  
Fax: +86-10-6597-8565