



# MSV series MSV-400



## Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.  
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

### General Design for Standby Power Applications

#### 【Design Life】

Up to 15 Years in Standby Service at 25°C  
Eurobat (20°C) : >12 YEARS VERY LONG LIFE

#### 【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)  
Discharge : -15°C ~ 50°C (5°F~122°F)  
Charge: -15°C ~ 40°C (5°F~104°F)  
Storage: -15°C ~ 40°C (5°F~104°F)

#### 【Float Charging Voltage】

2.21 ~ 2.25 VDC/Unit at 25°C (77°F)

#### 【Equalization Charging Voltage】


2.35 VDC/Unit at 25°C (77°F)

#### 【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);  
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

### Specification

Nominal Voltage	2V (single cell per unit)		
Nominal Capacity	400 Ah @10hr-rate to 1.80V per cell @25°C (77°F)		
Weight	Approx. 24.90 Kg (54.88 lbs)		
Maximum Discharge Current	2400 A (5sec)		
Internal Resistance	Approx. 0.43 mΩ		
Short Circuit Current	--		
Maximum Charge Current	120 A		
Terminal types	I4 thread copper alloy terminal to accept M8 bolt		
Terminal tightening torque	126±25 Kg·cm / 109±22 Lbf·in / 12.3±2.5 N·m		
Container Material	Flame Retardant ABS (UL 94-V0)		
Dimensions	Length (L)	197.0±2.0 mm	7.76±0.08 inch
	Width (W)	170.0±2.0 mm	6.69±0.08 inch
	Container height (h)	331.0±2.5 mm	13.03±0.10 inch
	Overall Height (H)	339.0±2.5 mm	13.15±0.10 inch

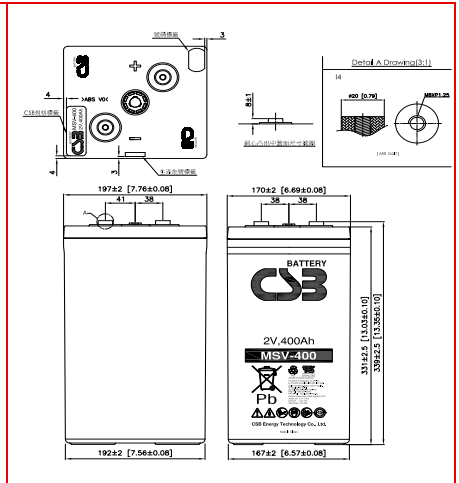

### Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	2HR	2.5HR	3HR	5HR	6HR	8HR	10HR	20HR	24HR
1.60V	586	425	259	158	133	116	77.3	66.2	52.0	43.0	21.5	18.0
1.67V	543	399	253	156	132	115	76.7	65.8	51.7	42.9	21.4	17.9
1.70V	517	385	248	155	131	114	76.4	65.5	51.5	42.7	21.3	17.8
1.75V	476	354	237	152	129	113	75.4	64.8	51.0	42.3	21.2	17.6
1.80V	428	313	222	146	124	109	73.5	63.3	50.0	41.6	20.8	17.3
1.83V	381	284	211	140	120	106	71.5	61.7	48.9	40.8	20.4	17.0

### Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	2HR	2.5HR	3HR	5HR	6HR	8HR	10HR	20HR	24HR
1.60V	884	733	474	292	245	212	142	124	99.2	83.5	41.8	34.8
1.67V	871	701	465	289	242	210	141	123	98.5	83.1	41.6	34.6
1.70V	862	679	458	287	241	209	141	122	98.3	83.0	41.5	34.6
1.75V	842	631	442	282	238	207	140	121	97.8	82.5	41.3	34.4
1.80V	755	566	420	273	232	203	139	120	96.8	81.5	40.8	34.0
1.83V	674	520	402	262	224	197	136	119	95.1	80.2	40.1	33.4

Please refer to the official site for the latest rating confirmation. URL: [www.csb-battery.com](http://www.csb-battery.com)

Issued: 201112

### Sales Offices

希世比能源科技股份有限公司  
CSB Energy Technology Co., Ltd.

#### BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600  
Fax: +886-2-2888-3300

#### USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)  
Fax: +1-817-244-4445

#### SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075  
Fax: +86-755-8831-6548

#### EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140  
Fax: +31(0)180-418-327

#### SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094  
Fax: +86-21-5046-1046

Recognized under UL 1989,  
and certified by ISO 9001, 14001, 45001, 50001.



#### TAIPEI OFFICE

Tel: +886-2-2880-5600  
Fax: +886-2-2888-3300

#### BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265  
Fax: +86-10-6597-8565