





Outline: 产品概要

- Magnetic shielded structure: excellent resistance to electromagnetic interference(EMI)
磁屏蔽结构：抗电磁干扰(EMI)性能强
- Assemblage design, sturdy structure.
组立式设计，结构坚固。
- Low magnetic loss, low ESR, small parasitic capacitance.
低磁损，低阻抗，寄生电容小。
- Closed magnetic circuit, ultra low buzz noise, can high density mount.
磁路闭合，超低蜂鸣噪音，可高密度贴装。
- Operating temperature : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
(Including coil's temperature rise)
工作温度： $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ (包含线圈发热)


1 Appearance and dimensions (mm) 外形尺寸

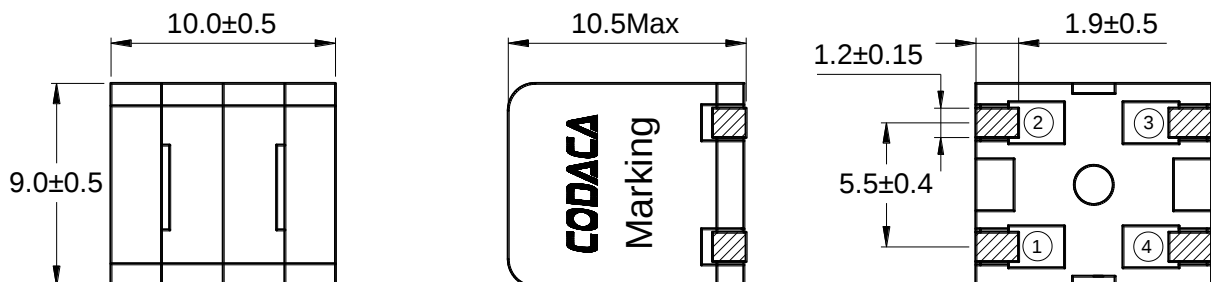


2 Marking 印字标识



3 Reference land pattern (mm) 参考基板尺寸

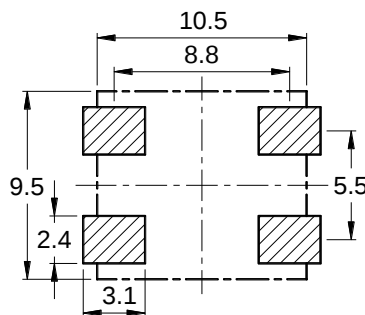

4 Schematic 原理图

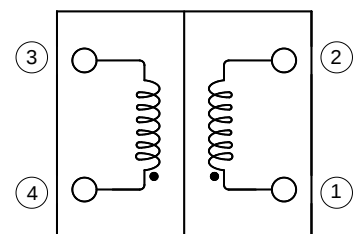

5 Electrical characteristics

电气特性

Part No. 型 号	Inductance (μH) (1-2)/(3-4) 电感值 ※1 ±20%	D.C.R. (mΩ) (1-2)/(3-4) 直流电阻		Saturation current (A) (1-2)/(3-4) 饱和电流 ※2 Typical	Temperature rise current (A) (1-2)/(3-4) 温升电流 ※3 Typical
		Typical	Max		
CSD0910B-3R3M	3.30	15.6	19.0	18.0	5.00
CSD0910B-4R7M	4.70	15.6	19.0	11.0	5.00
CSD0910B-6R8M	6.80	15.6	19.0	8.70	5.00
CSD0910B-8R2M	8.20	15.6	19.0	6.80	5.00
CSD0910B-100M	10.0	15.6	19.0	5.60	5.00
CSD0910B-120M	12.0	20.0	22.0	5.00	4.80
CSD0910B-150M	15.0	32.7	36.0	4.60	3.50
CSD0910B-220M	22.0	32.7	36.0	3.00	3.50

■ All data is tested based on 25°C ambient temperature.

所有数据基于环境温度 25°C条件下测试。

※1 Inductance measure condition at 1kHz, 1V.

电感测试条件为 1kHz, 1V。

※2 Saturation current: the actual value of DC current when the inductance decrease 20% of its initial value.

饱和电流: 电感值下降其初始值的 20%时所加载的实际直流电流值。

※3 Temperature rise current: the actual value of DC current when the temperature rise is $\Delta T40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$).









温升电流: 使产品温度上升到 $\Delta T40^{\circ}\text{C}$ 时所加载的实际直流电流值($T_a=25^{\circ}\text{C}$)。

※ Special remind: Circuit design, component placement, PWB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.

特别提醒: 线路设计, 组件布局, 印刷线路板(PWB)尺寸及厚度, 散热系统等均会影响产品温度。

请务必在最终应用时, 验证产品发热状况。

6 Saturation current VS temperature rise current curve 饱和电流 VS 温升电流曲线

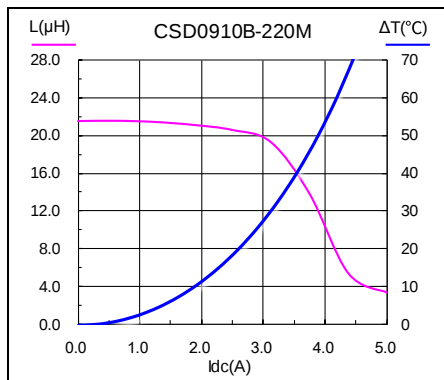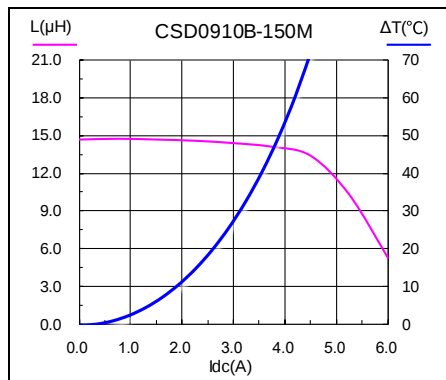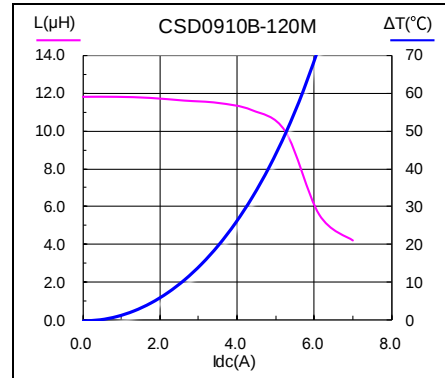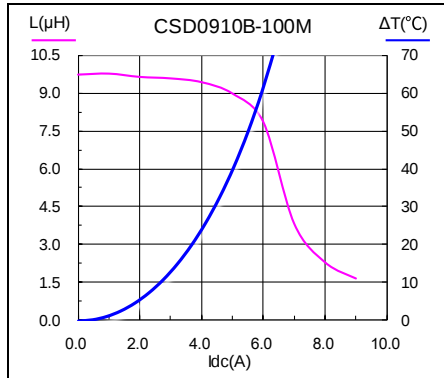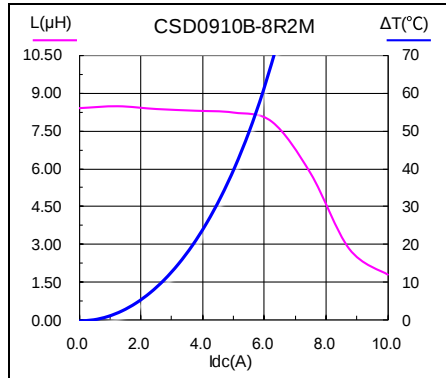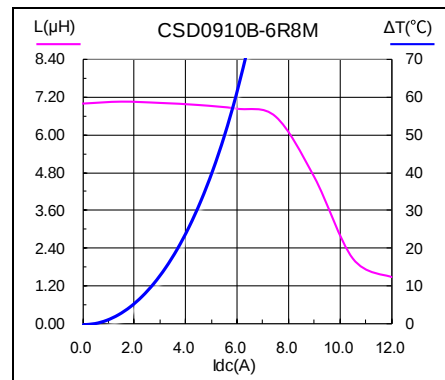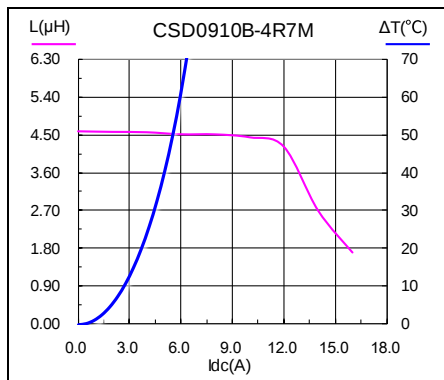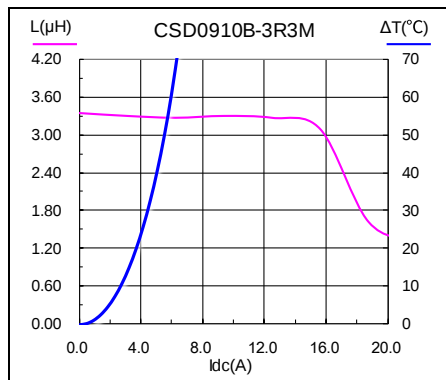


7 Packing specification

包装规格

7.1 Carrier tape dimensions (mm)


载带尺寸

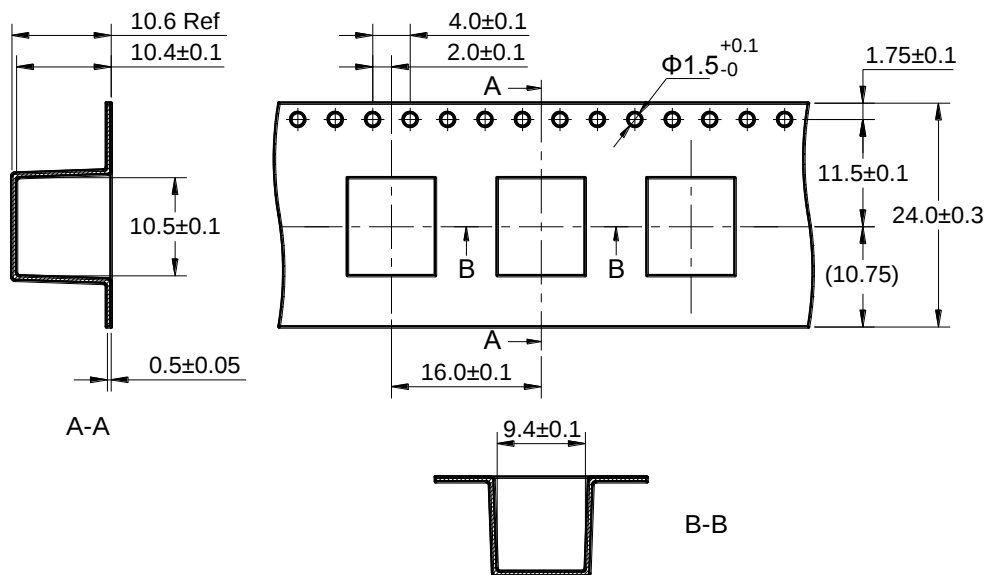

※ Packing is referred to the international standard IEC 60286-3.
包装参照国际标准 IEC 60286-3。

7.2 Tape direction


捆包方向

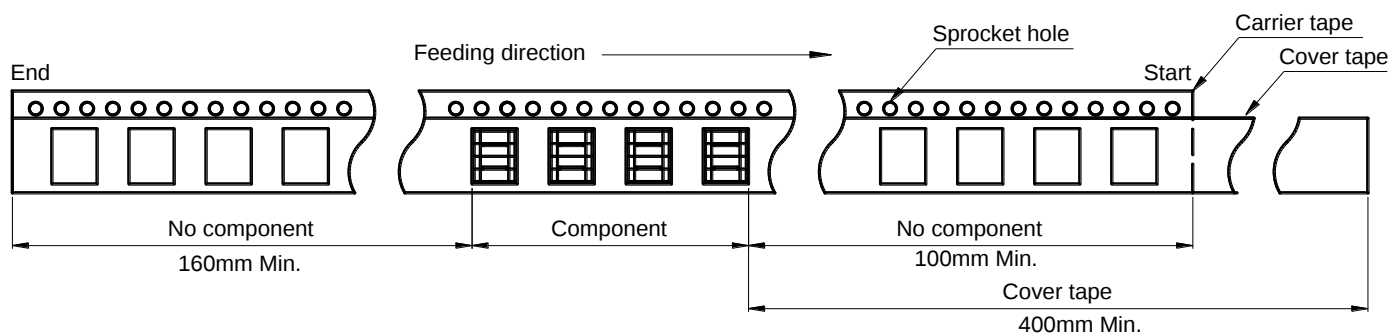

7.3 Cover tape peel off condition

盖带剥离条件


- Cover tape peel force shall be 0.1 to 1.3N.
盖带剥离力度为 0.1~1.3N。
- Reference peel speed 300±10mm/min.
参考剥离速度 300±10mm/分钟。

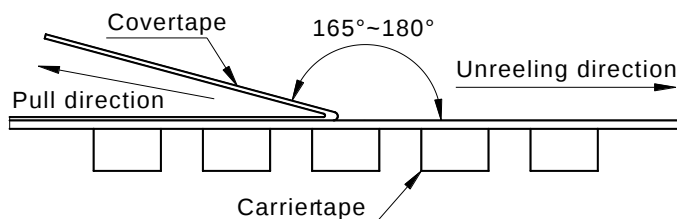

CODACA科达嘉

High Current Inductor For Digital AMP
- CSD0910B Series

7.4 Reel dimensions (mm)
卷盘尺寸

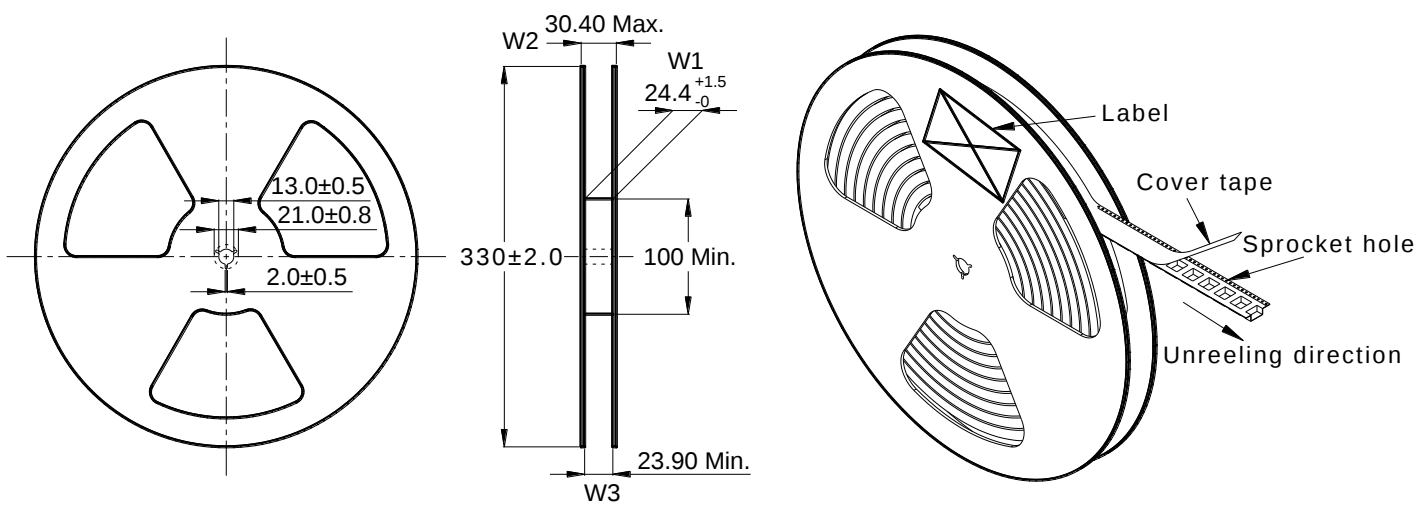

7.5 Carton dimensions and packing quantity
包装箱尺寸和包装数量

- Inner Carton：340×340×95mm
内包装盒
- Out Carton ：355×355×385mm
外包装箱

Product Series 产品系列	Quantity / Reel 数量 / 卷	Inner Carton Quantity 内盒 包装数量	Out Carton Quantity 外箱 包装总数量
CSD0910B	300pcs	(300×2) = 600pcs	(600×3) = 1800pcs

7.6 Label making
标签标识

The following items will be marked on the reel of product label and shipping label.
以下项目将明确标识于产品卷盘标签以及运输标签上。

Production Label
产品标签

■ Part No.
产品型号

■ Electrical Information
产品电性信息

■ Quantity
数量

■ Packing No.
包装流水号

Shipping Label
运输标签

■ Customer Name
客户名称

■ Customer Part No.
客户型号

■ Supplier Part No.
供应商型号

■ Supplier Name
供应商名称


■ Country of origin
产品产地

8 Soldering specification

焊接规格

8.1 Reflow profile for SMT components

SMT 回流焊温度曲线

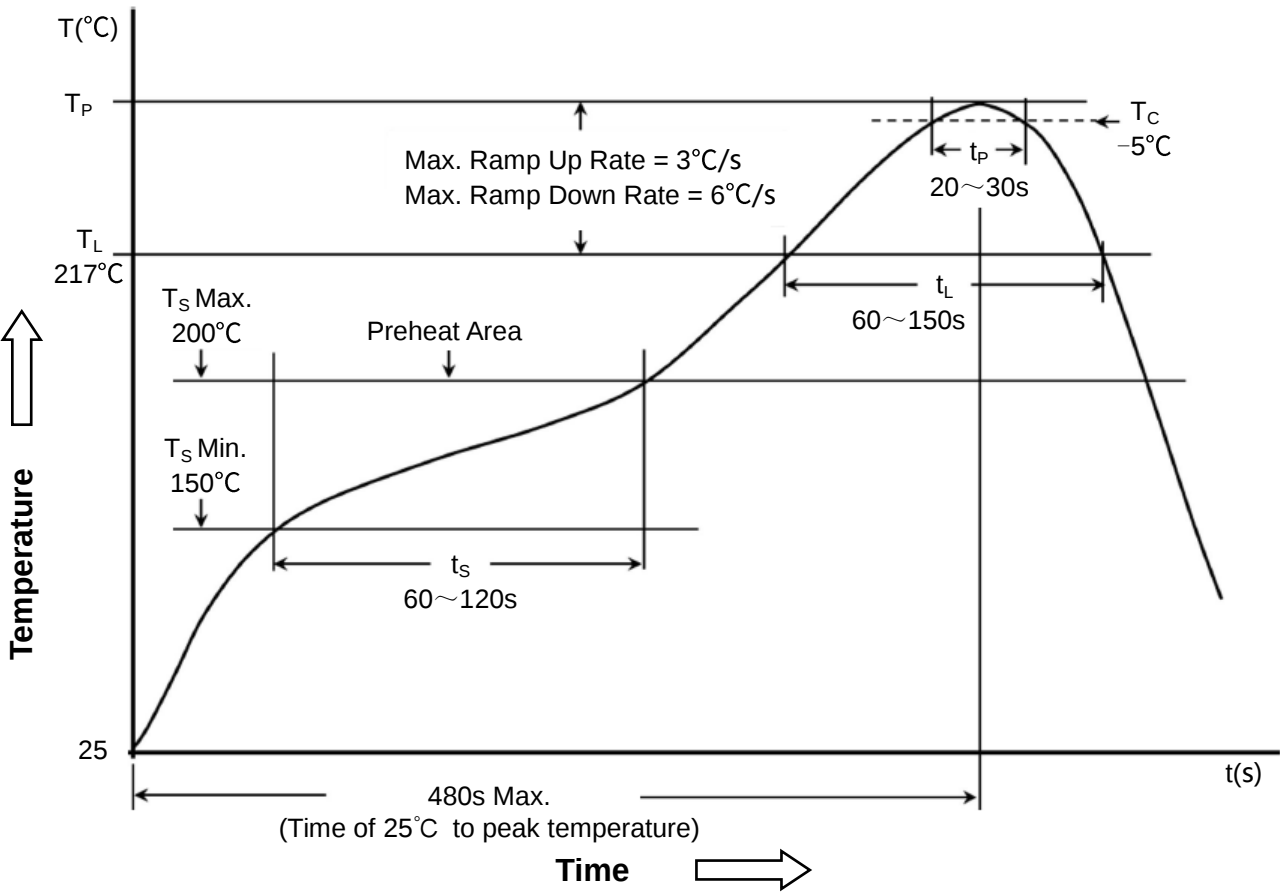

8.2 Classification of peak package body temperature (T_{P})

封装体峰值温度(T_{P})分类

	Package Thickness 封装厚度	Package Volume 封装体积		
		<350 mm ³	350~2000 mm ³	>2000 mm ³
PB-Free Assembly 无铅装配	<1.6mm	260°C	260°C	260°C
	1.6~2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

※ Reflow is referred to standard IPC/JEDEC J-STD-020D.
回流焊参照标准 IPC/JEDEC J-STD-020D。