




Outline: 产品概要

- Low DCR, high rated current.
低直流电阻, 耐大电流。
- Magnetic shielded structure
磁性屏蔽结构
- Lead free product, RoHS compliant.
无铅产品, 符合 RoHS 指令。
- Carrier tape packing, suitable for SMT process.
载带包装, 适用于回流焊 SMT 工艺。
- Widely used in buck converter, laptop, display, network communication equipment, and etc.
广泛应用于升降压转换器, 笔记本电脑, 显示器, 网络通信设备等。
- Operating temperature : -40°C ~ +125°C
(Including coil's temperature rise)
工作温度: -40°C ~ +125°C (包含线圈发热)


1 Appearance and Dimensions (mm) 外形尺寸 (mm)

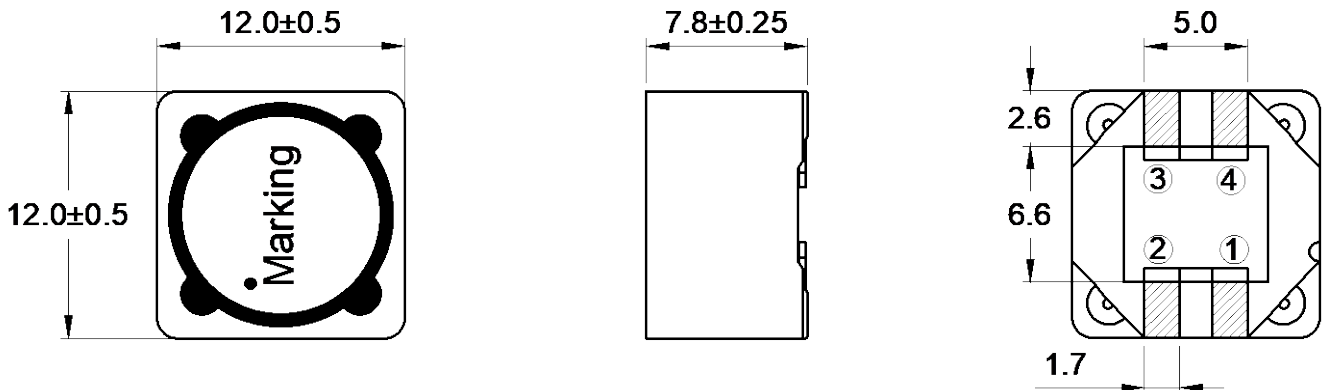


2 Marking 印字标识



3 Reference land pattern (mm) 参考基板尺寸 (mm)

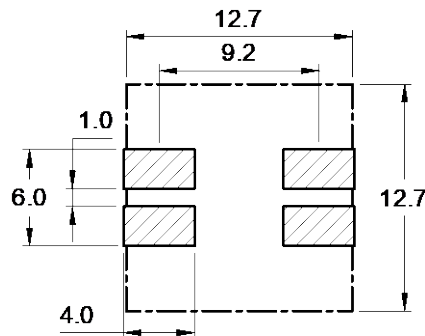

4 Schematic 原理图



5 Electrical Characteristics

电气特性

Part No. 型号	Inductance (μ H) 电感值 ※1	D.C.R. (m Ω) 直流电阻		Leakage Inductance (μ H) 漏感 ※2	Saturation Current (A) 饱和电流 ※3			Temperature rise Current (A) 温升电流 ※4	
		Typical	Max		10% drop	20% drop	30% drop	Both Windings	One Winding
SPRHS127C-3R3M:3R3M	3.30 \pm 20%	22.0	30.0	0.21	19.00	20.00	22.00	3.58	5.01
SPRHS127C-4R7M:4R7M	4.70 \pm 20%	28.3	40.0	0.22	13.90	15.20	16.36	3.16	4.47
SPRHS127C-5R6M:5R6M	5.60 \pm 20%	29.4	46.0	0.23	13.38	14.86	15.74	2.87	4.06
SPRHS127C-6R8M:6R8M	6.80 \pm 20%	32.8	48.0	0.22	12.10	13.56	14.20	2.81	3.98
SPRHS127C-8R2M:8R2M	8.20 \pm 20%	35.5	55.0	0.34	10.30	11.52	12.20	2.76	3.90
SPRHS127C-100M:100M	10.0 \pm 20%	39.3	58.0	0.34	8.80	10.00	10.66	2.56	3.62
SPRHS127C-120M:120M	12.0 \pm 20%	42.6	62.0	0.36	8.20	9.18	9.74	2.48	3.50
SPRHS127C-150M:150M	15.0 \pm 20%	43.9	72.0	0.41	7.40	8.36	9.03	2.30	3.25
SPRHS127C-180M:180M	18.0 \pm 20%	61.8	80.0	0.37	6.50	7.38	7.86	2.18	3.08
SPRHS127C-220M:220M	22.0 \pm 20%	70.6	96.0	0.41	6.00	6.80	7.26	1.99	2.81
SPRHS127C-270M:270M	27.0 \pm 20%	85.0	120	0.43	5.80	6.56	7.02	1.78	2.52
SPRHS127C-330M:330M	33.0 \pm 20%	93.9	150	0.56	5.50	6.10	6.52	1.59	2.25
SPRHS127C-390M:390M	39.0 \pm 20%	103	161	0.64	4.70	5.26	5.60	1.54	2.18
SPRHS127C-470M:470M	47.0 \pm 20%	122	180	0.70	3.70	4.34	4.60	1.45	2.05
SPRHS127C-560M:560M	56.0 \pm 20%	138	190	0.76	3.60	4.18	4.50	1.41	2.00
SPRHS127C-680M:680M	68.0 \pm 20%	180	210	0.88	3.50	4.04	4.32	1.35	1.90
SPRHS127C-820M:820M	82.0 \pm 20%	195	280	0.85	3.30	3.72	4.02	1.16	1.65
SPRHS127C-101M:101M	100 \pm 20%	246	300	0.90	2.80	3.24	3.46	1.13	1.59
SPRHS127C-121K:121K	120 \pm 10%	298	410	1.31	2.60	2.94	3.16	0.96	1.36
SPRHS127C-151K:151K	150 \pm 10%	367	460	1.46	2.20	2.54	2.70	0.91	1.29
SPRHS127C-181K:181K	180 \pm 10%	450	510	0.93	2.10	2.42	2.58	0.86	1.22
SPRHS127C-221K:221K	220 \pm 10%	523	690	1.54	1.90	2.16	2.28	0.74	1.05
SPRHS127C-271K:271K	270 \pm 10%	676	900	1.17	1.70	1.94	2.10	0.65	0.92
SPRHS127C-331K:331K	330 \pm 10%	807	1020	4.14	1.50	1.70	1.84	0.61	0.86
SPRHS127C-391K:391K	390 \pm 10%	969	1120	1.64	1.40	1.60	1.70	0.58	0.82
SPRHS127C-471K:471K	470 \pm 10%	1090	1530	0.25	1.30	1.50	1.60	0.50	0.70
SPRHS127C-561K:561K	560 \pm 10%	1280	1690	2.68	1.20	1.34	1.46	0.47	0.67
SPRHS127C-681K:681K	680 \pm 10%	1603	2290	2.11	1.00	1.08	1.22	0.41	0.58
SPRHS127C-821K:821K	820 \pm 10%	2003	2550	2.39	0.900	1.04	1.18	0.39	0.55
SPRHS127C-102K:102K	1,000 \pm 10%	2491	2870	4.28	0.850	0.948	1.050	0.32	0.45

■ All data is tested based on 25°C ambient temperature.

所有数据基于环境温度 25°C条件下测试。

※1 Inductance measure condition at 100kHz, 0.1V.

电感测试条件为 100kHz, 0.1V。

※2 Leakage inductance is for L1 and is measured with L2 shorted.

漏感：在短路 L2 绕组的前提下测试 L1 绕组所得的电感。

※3 Saturation current: the actual value of DC current when the inductance decrease corresponding percentage of its initial value.

饱和电流：电感值下降其初始值相应百分比时所加载的实际直流电流值。

※4 Temperature rise current: the actual value of DC current when the temperature rise is $\Delta T40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$).


温升电流：使产品温度上升到 $\Delta T40^{\circ}\text{C}$ 时所加载的实际直流电流值($T_a=25^{\circ}\text{C}$)。













※ Special remind: Circuit design, component placement, PCB size and thickness, cooling system and etc. all will affect the product temperature. Please verify the product temperature in the final application.

特别提醒：线路设计，组件布局，印刷电路板(PCB)尺寸及厚度，散热系统等均会影响产品温度。

请务必在最终应用时，验证产品发热状况。

**6 Saturation Current vs Temperature Rise Current Curve
饱和电流 vs 升温电流曲线**

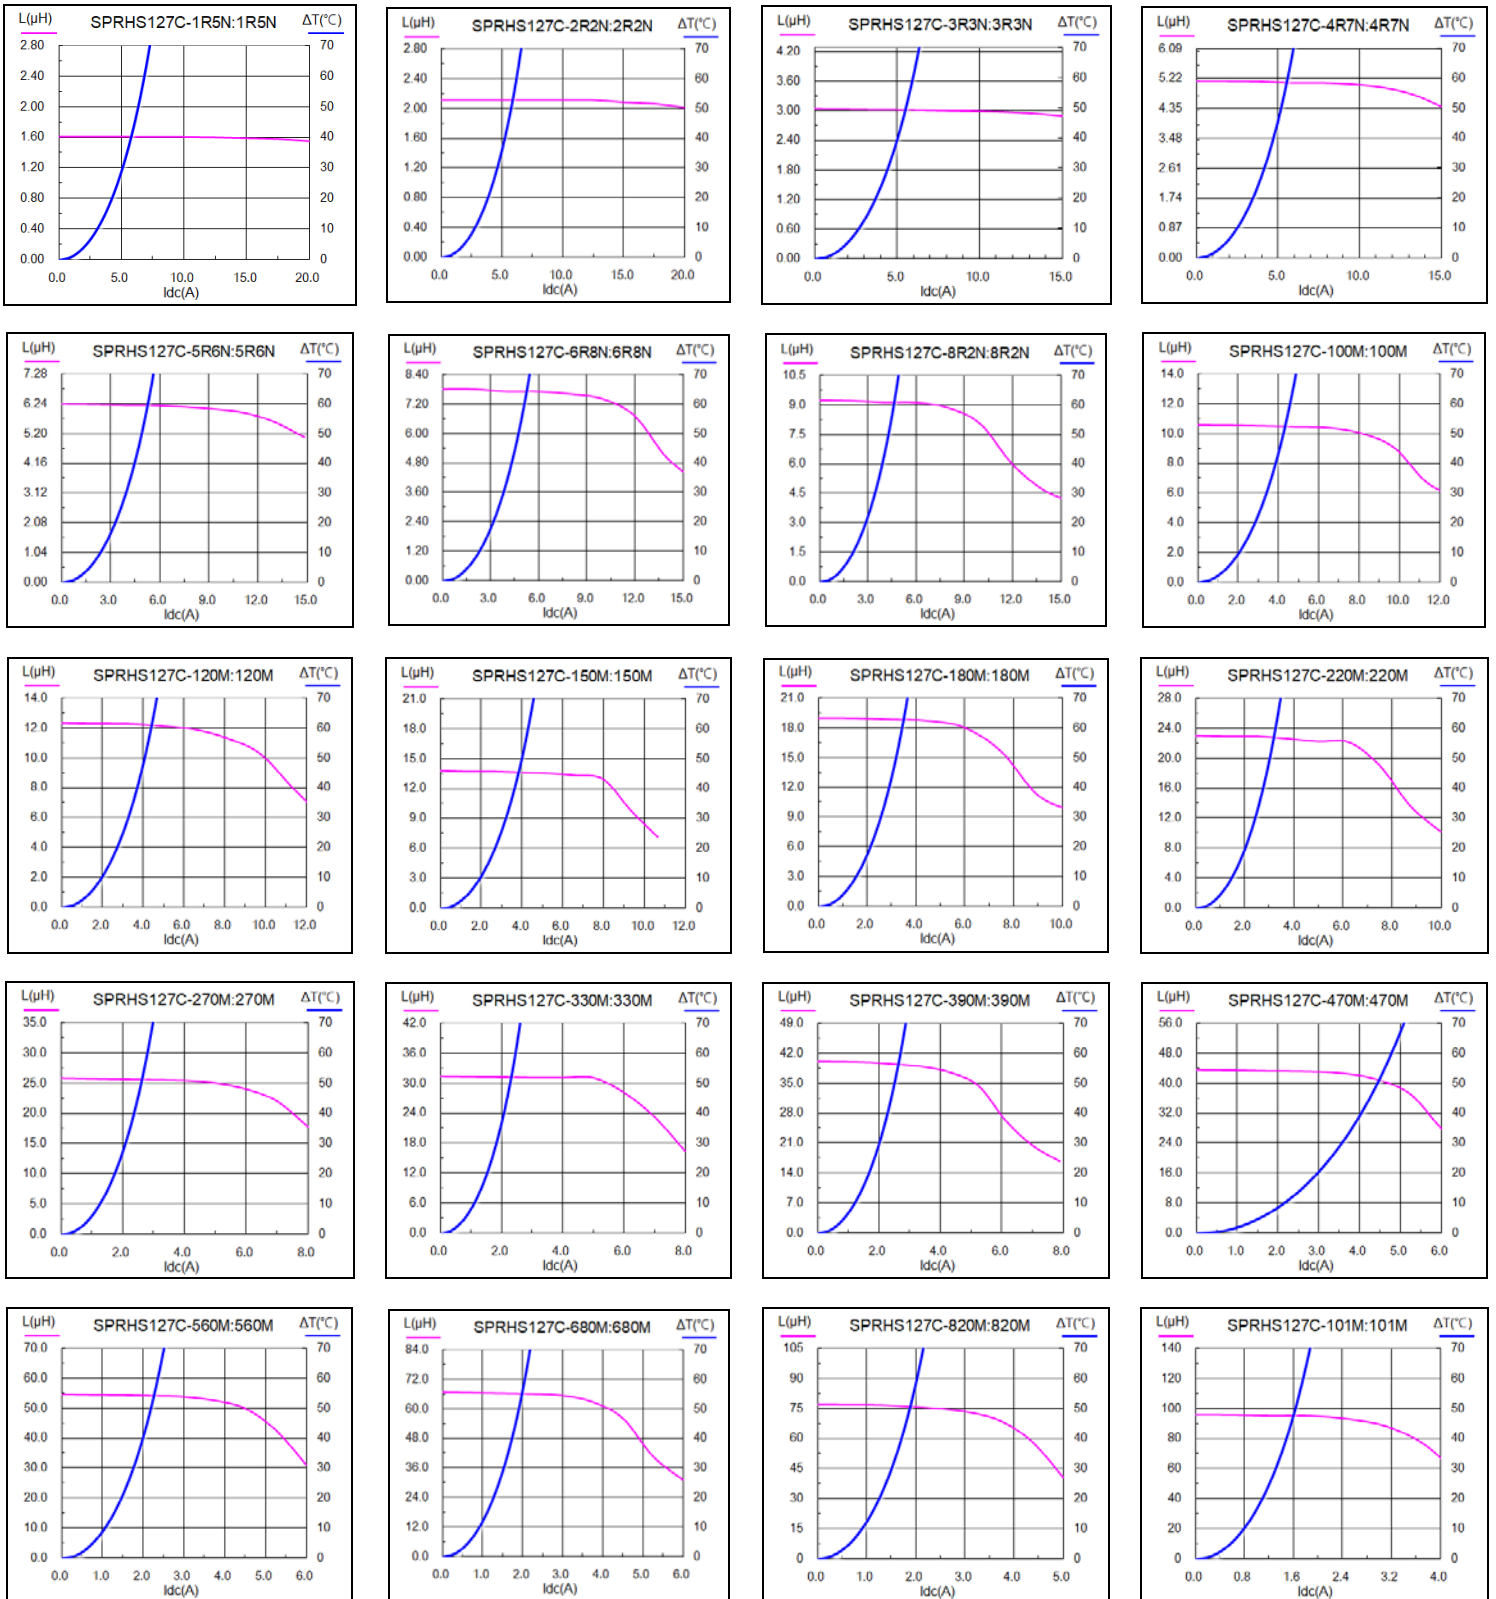

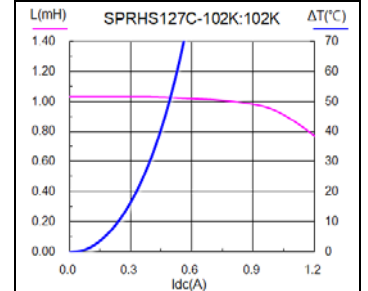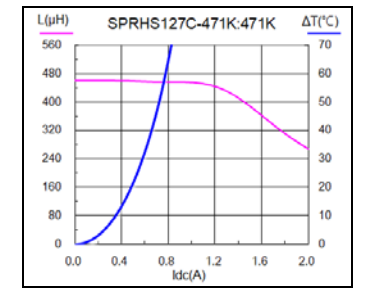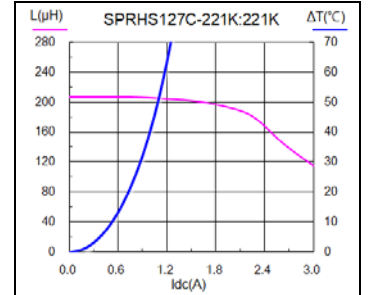


7 Packing specification

包装规格

7.1 Carrier tape dimensions (mm)


载带尺寸

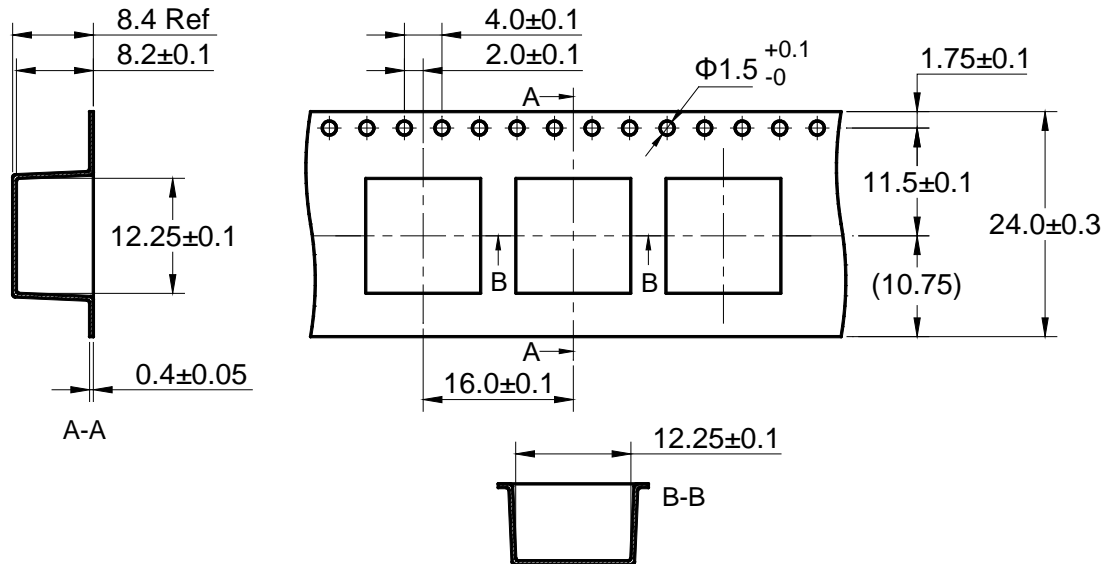

※ Packing is referred to the international standard IEC 60286-3.
包装参照国际标准 IEC 60286-3。

7.2 Tape direction


捆包方向

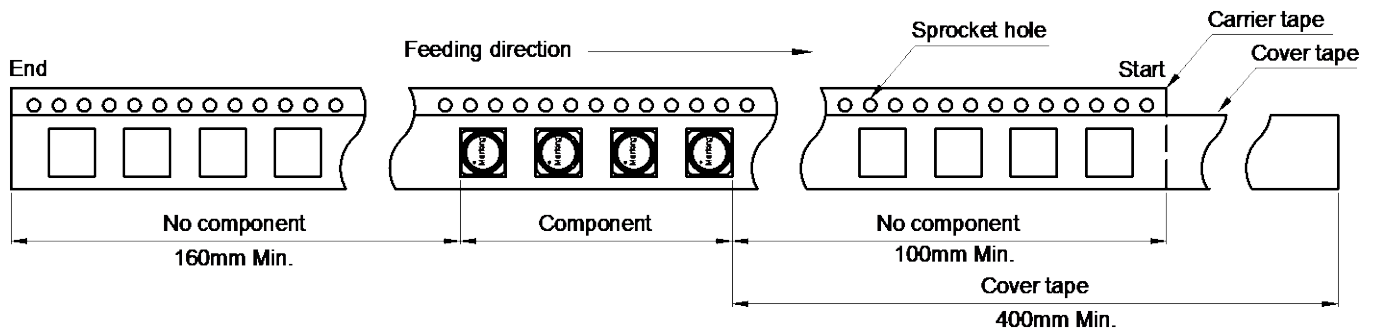


7.3 Cover tape peel off condition

盖带剥离条件

- Cover tape peel force shall be 0.1 to 1.3N.
盖带剥离力度为 0.1~1.3N。
- Reference peel speed 300±10mm/min.
参考剥离速度 300±10mm/分钟。

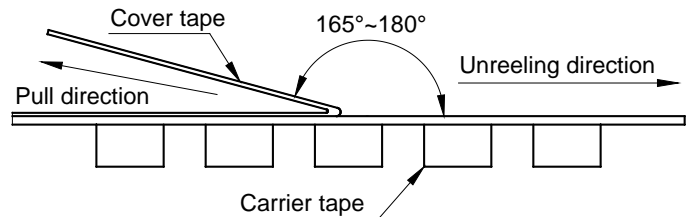

7.4 Reel Dimensions (mm) 卷盘尺寸(mm)

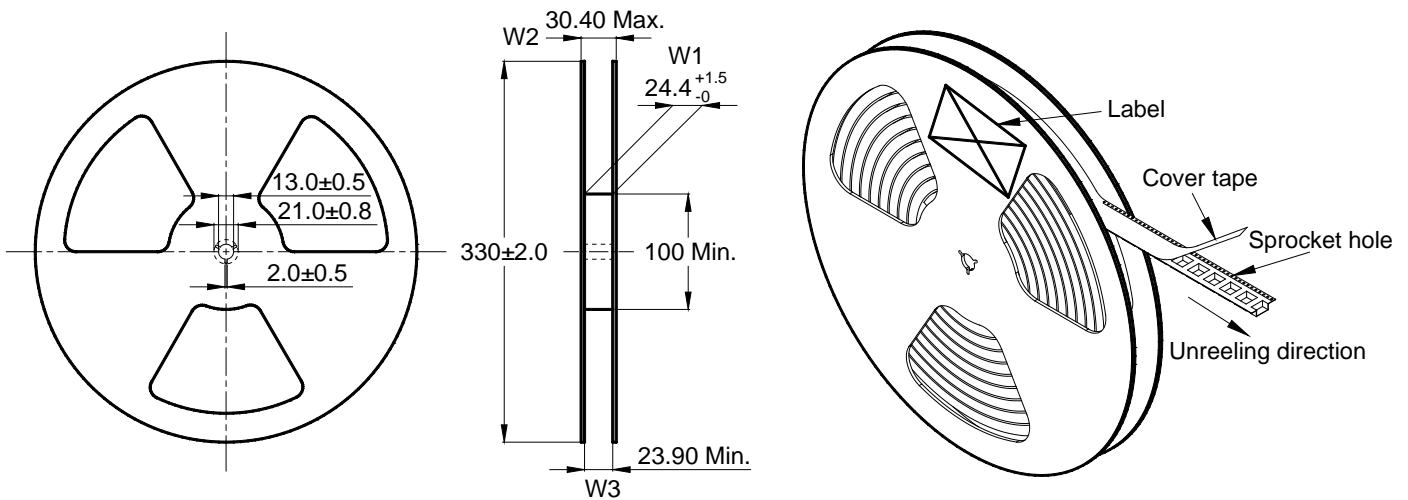

7.5 Carton dimensions and packing quantity 包装箱尺寸和包装数量

■ Inner Carton: 365×345×105mm
内包装盒

■ Out Carton : 385×365×245mm
外包装箱

Product Series 产品系列	Quantity / Reel 数量 / 卷	Inner Carton Quantity 内盒 包装数量	Out Carton Quantity 外箱 包装总数量
SPRHS127C	500pcs	(500×3) = 1500pcs	(1500×2) = 3000pcs

7.6 Label Making 标签标识

The following items will be marked on the tray of product label and shipping label.
以下项目将明确标识于产品吸塑盘标签以及运输标签上。

Production Label 产品标签
■ Packing No. 包装流水号
■ Quantity 数量
■ Shipment Date 出货日期
■ Part No. 产品型号
■ Customer Part No. 客户型号
■ Customer Po No. 客户订单号


Shipping Label 运输标签
■ Packing No. 包装流水号
■ Quantity 数量
■ Shipment Date 出货日期
■ Part No. 产品型号
■ Customer Part No. 客户型号
■ Customer Po No. 客户订单号

8 Soldering Specification

焊接规格

8.1 Reflow profile for SMT components

SMT 回流焊温度曲线

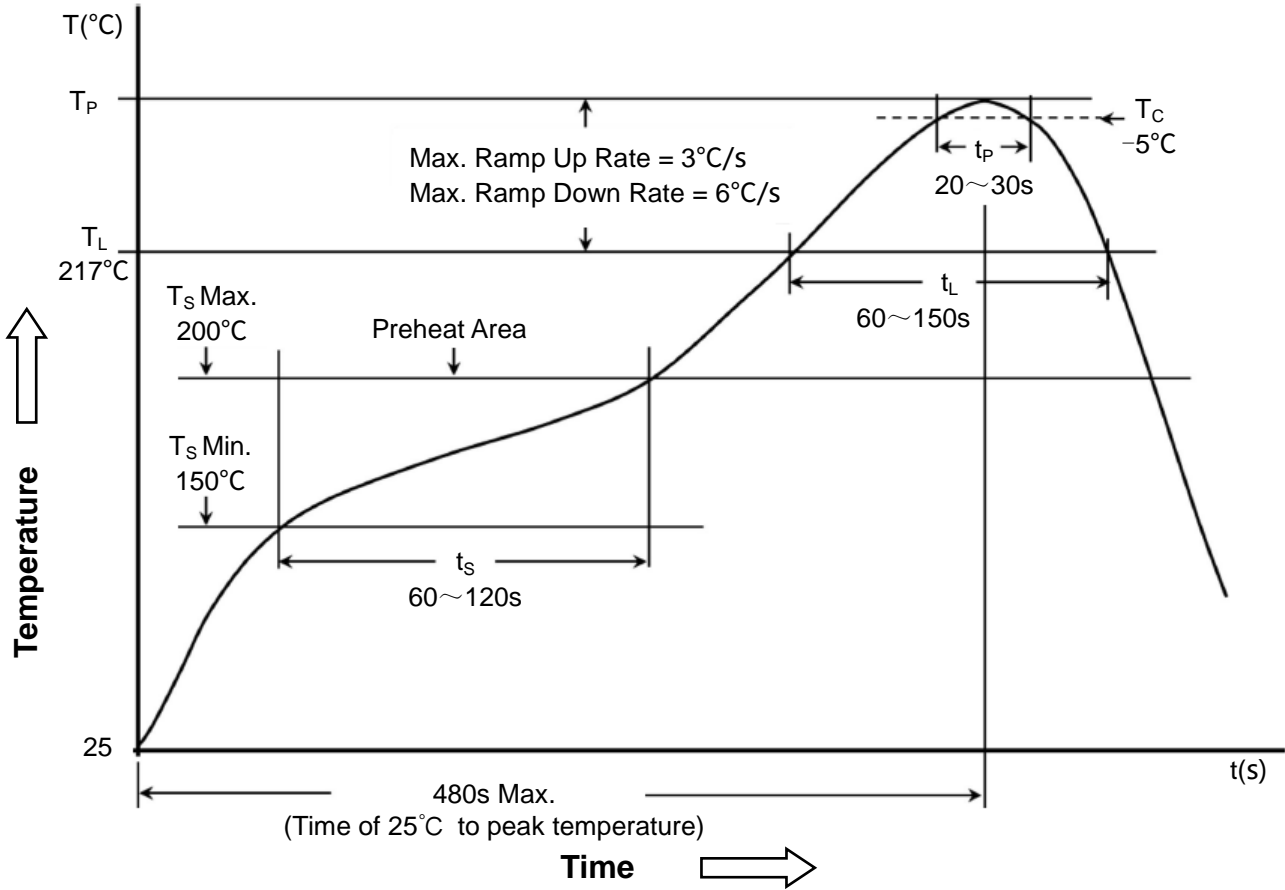

8.2 Classification of peak package body temperature (Tp)

封装体峰值温度(Tp)分类

	Package Thickness 封装厚度	Package Volume 封装体积		
		<350 mm ³	350~2000 mm ³	>2000 mm ³
PB-Free Assembly 无铅装配	<1.6mm	260°C	260°C	260°C
	1.6~2.5mm	260°C	250°C	245°C
	≥2.5mm	250°C	245°C	245°C

※ Reflow is referred to standard IPC/JEDEC J-STD-020D.
回流焊参照标准 IPC/JEDEC J-STD-020D.