

CPDQ03C5V0UP-HF

RoHS Device

Halogen Free





Features

- IEC61000-4-2 Level 4 ESD Protection.
- Uni-directional ESD protection of one line.
- Surface mount package.
- High component density.

Mechanical data

- Case: 0402C-03/SOT-883 package, molded plastic.
- Mounting position: Any.

Circuit Diagram

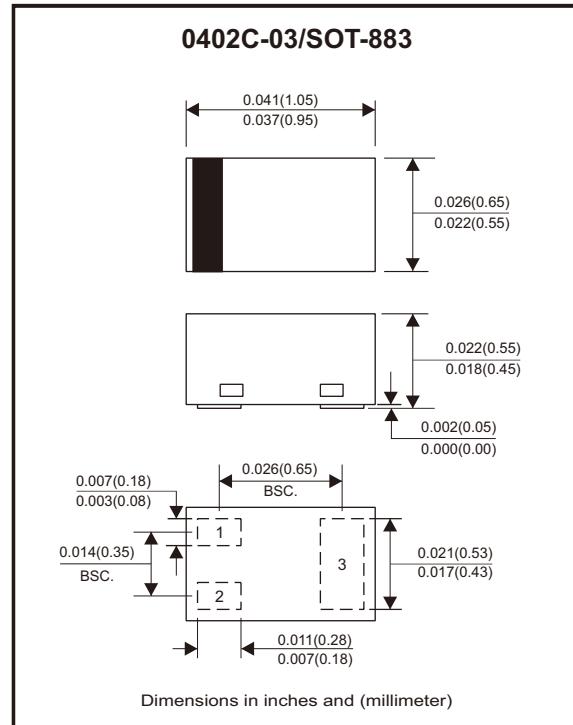

Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Peak pulse power	T _P = 8/20μs	P _{PP}	30	W
Peak pulse current	T _P = 8/20μs	I _{PP}	2	A
ESD capability	IEC 61000-4-2(air) IEC 61000-4-2(contact)	ESD	±15 ±8	kV
Operation temperature range		T _J	-55~+125	°C
Storage temperature range		T _{STG}	-55~+150	°C

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Working peak reverse voltage		V _{RWM}			5	V
Breakdown voltage	I _F = 1mA	V _{BR}	6			V
Reverse leakage current	V _{RWM} = 5V	I _R			1	μA
Forward voltage	I _F = 10mA	V _F			1.2	V
Clamping voltage	I _{PP} = 2A, T _P = 8/20μs	V _c			15	V
Junction capacitance	V _R = 0V, f = 1MHz (any I/O pin to GND)	C _J			12	pF

Company reserves the right to improve product design , functions and reliability without notice.

REV:A

SMD ESD Protection Diode

Comchip
SMD Diode Specialist

Rating and Characteristic Curves (CPDQ03C5V0UP-HF)

Fig.1 - 8/20 μ s Peak Pulse Current
Waveform Acc. IEC 61000-4-5

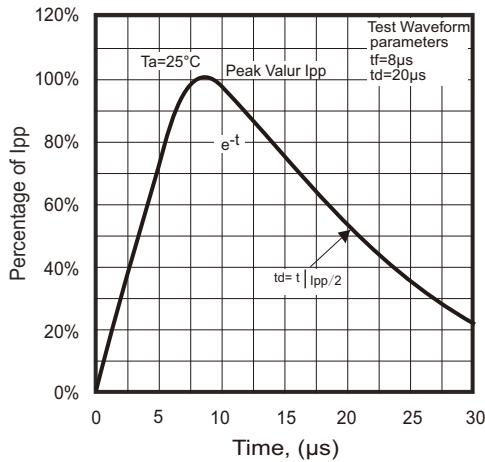


Fig.2 - Power Rating Derating Curve

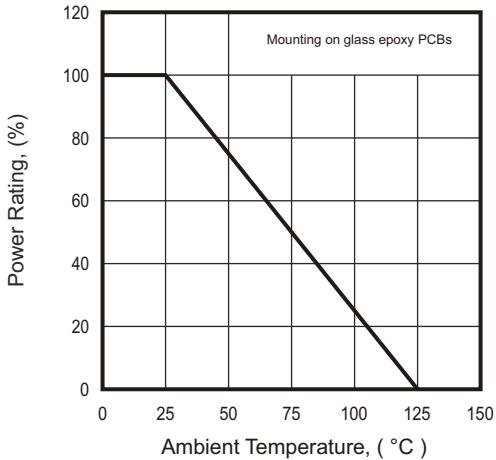


Fig.3 - Typical Clamping Voltage Vs.
Peak Pulse Current

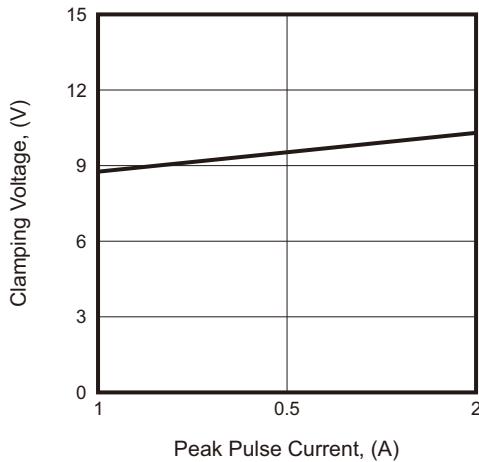


Fig.4 - Forward Characteristic



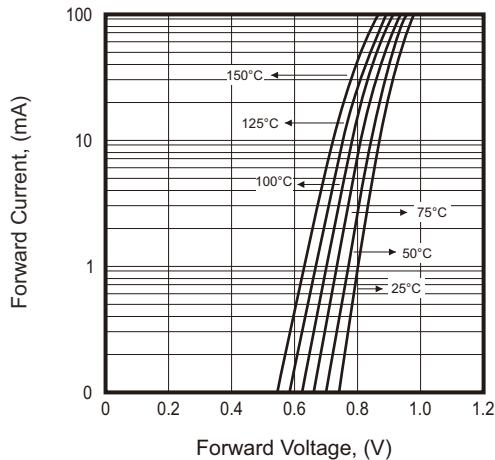


Fig.5 - Typical Capacitance Between
Terminals Characteristics

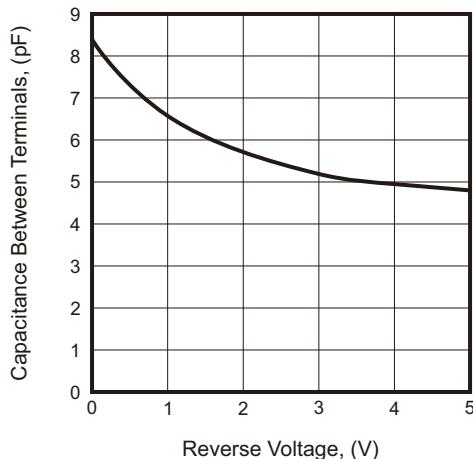

Company reserves the right to improve product design , functions and reliability without notice.

Reel Taping Specification

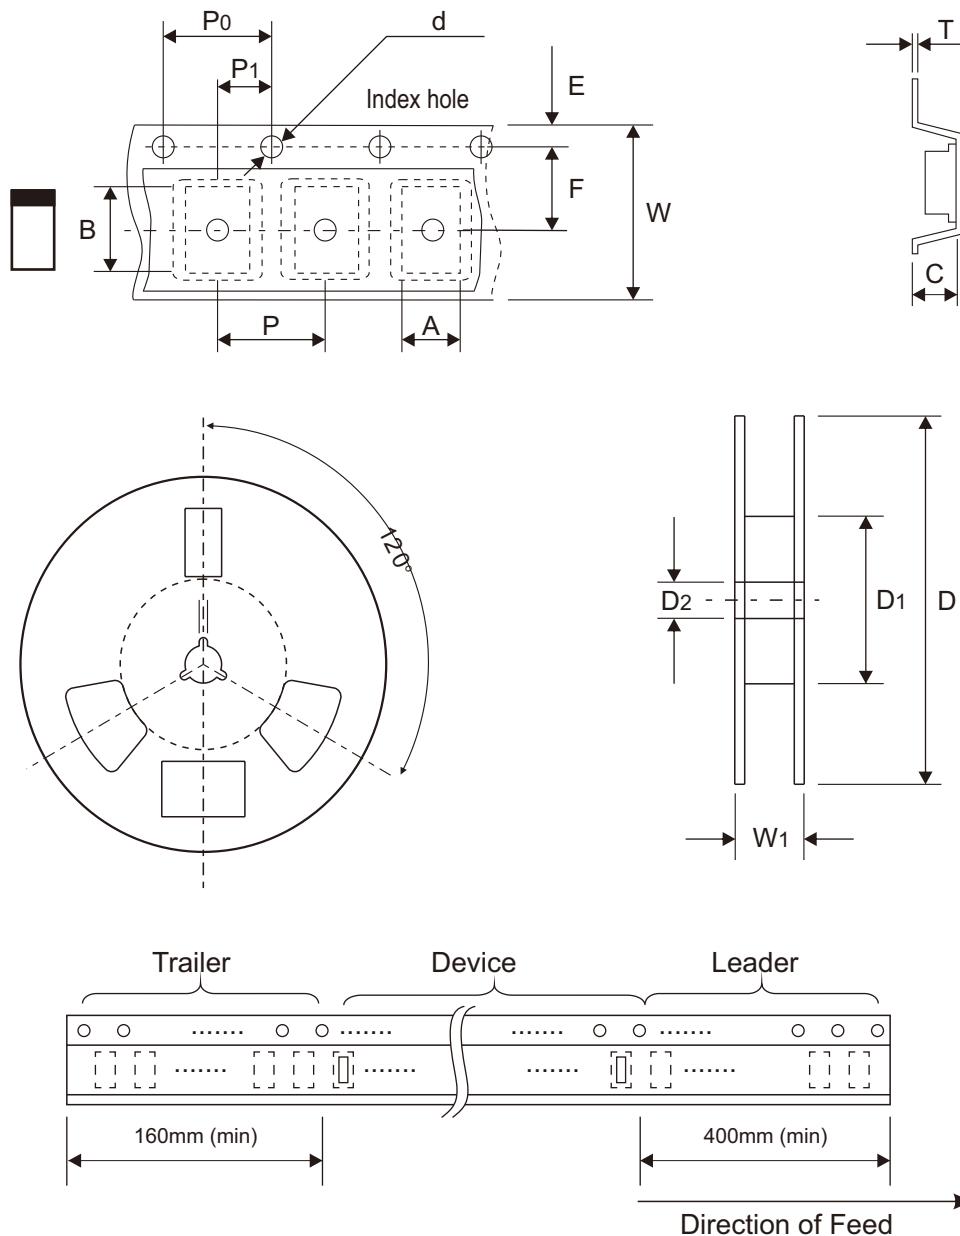

	SYMBOL	A	B	C	d	D	D1	D2
0402C-03 (SOT-883)	(mm)	0.75 ± 0.05	1.17 ± 0.05	0.65 ± 0.05	$1.50 + 0.10$ $- 0.00$	178.00 ± 1.00	60.00 ± 0.50	13.50 ± 0.20
	(inch)	0.030 ± 0.002	0.046 ± 0.002	0.026 ± 0.002	$0.059 + 0.004$ $- 0.000$	7.008 ± 0.039	2.362 ± 0.020	0.531 ± 0.008

	SYMBOL	E	F	P	P0	P1	T	W	W1
0402C-03 (SOT-883)	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	$0.20 + 0.02$ $- 0.05$	8.00 ± 0.20	$12.00 + 0.50$ $- 0.00$
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	$0.008 + 0.001$ $- 0.002$	0.315 ± 0.008	$0.472 + 0.020$ $- 0.000$

Company reserves the right to improve product design , functions and reliability without notice.

REV:A


Marking Code

Part Number	Marking Code
CPDQ03C5V0UP-HF	E5

|E5

Suggested PAD Layout

SIZE	0402C-03 (SOT-883)	
	(mm)	(inch)
A	0.65	0.026
B	0.40	0.016
C	0.25	0.010
D	0.65	0.026
E	0.40	0.016

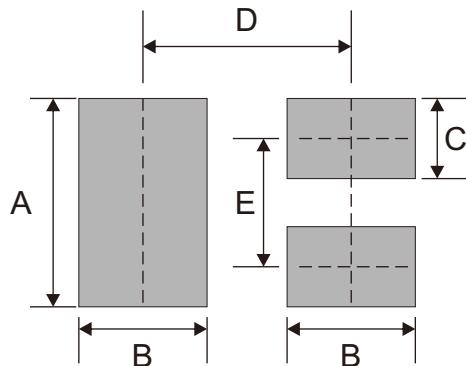

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
0402C-03 (SOT-883)	5,000	7