



605 Series Panel Mount Indicators

Application:

The 605 Series LED Panel Mount Indicators are designed for a variety of applications such as:

- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation

...and many more!

FIG. 1


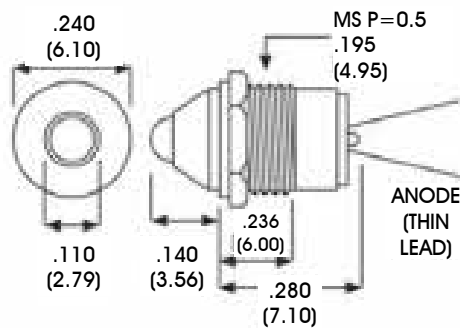


FIG. 2

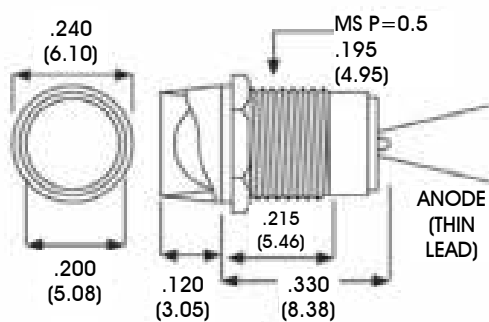

Dimensions in inches (mm)
All measurements are typical

Mechanical Information

Mounting Hole Size:	0.2047" (5.2 mm)
Max Panel Thickness:	.138" (3.5 mm)
Mounting Torque:	.362 lbs/ft (5 kg/cm) torque

Electrical specifications

Operating Voltage:	2 VDC (current limiting resistor required)
Operating Temp:	-25°C to +85°C
Storage Temp:	-25°C to +100°C
Electrical connection:	Through hole leads
Leads:	Straight leads

Construction

Housing:	Chrome plated brass
----------	---------------------

Certifications & Ratings

- RoHS compliant

Features & Benefits

- Low power consumption - uses up to 90% less energy than an incandescent indicator
- No heat generated
- Long life, lasting up to 100k hours
- Colors include red, green, yellow, and blue
- Front panel mounting
- LED can be recessed or protrude from housing



605 Series - Panel Mount Indicators

Ordering Information

Part Number	Color	Voltage (VDC)	Current (mA)	Typical Intensity (mcd)	LED Position	Finish	Figure	RoHS Compliant
605-1111-110F	RED	2	15	38	PROTRUDING	CHROME	1	Y
605-1211-110F	GREEN	2	15	72	PROTRUDING	CHROME	1	Y
605-1311-110F	YELLOW	2	15	53	PROTRUDING	CHROME	1	Y
605-2111-110F	RED	2	15	38	RECESS	CHROME	2	Y
605-2211-110F	GREEN	2	15	72	RECESS	CHROME	2	Y
605-2311-110F	YELLOW	2	15	53	RECESS	CHROME	2	Y