Headers(Sockets) for pluggable terminal blocks ／ ECH & EHD series

ECH250R

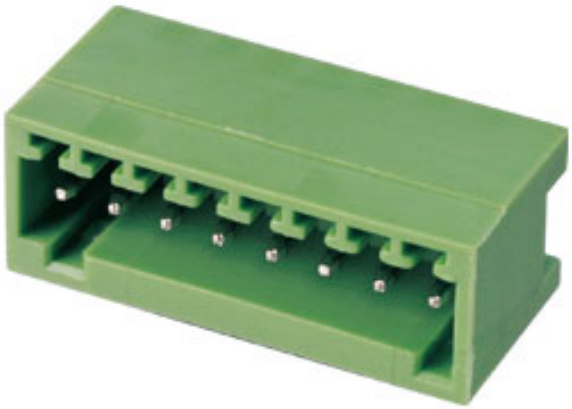

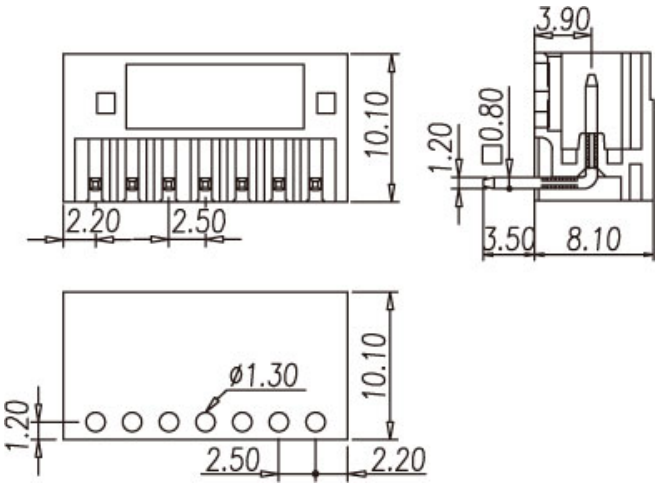

Pitch: 2.50mm

Approval		
Technical Data	UL	IEC
Rated voltage	150V	130V
Rated current	4A	4A
Conductor cross-section, solid (AWG/ mm^2)		
Conductor cross-section, flexible (AWG/ mm^2)		
Rated surge voltage (UL/IEC/Max.)	1.3 / 1.25 / KV	
Torque (Lb-in)		
Screw		
Wire strip length		

Pole	Cat. No.
02	ECH250R-02P
:	:
:	:
24	ECH250R-24P

TEL: +886-2-2908-0614 **FAX:** +886-2-2908-8549 **E-mail:** info@dinkle.com.tw

Copyright .DINKLE ENTERPRISE CO., LTD. All Right Reserved.