
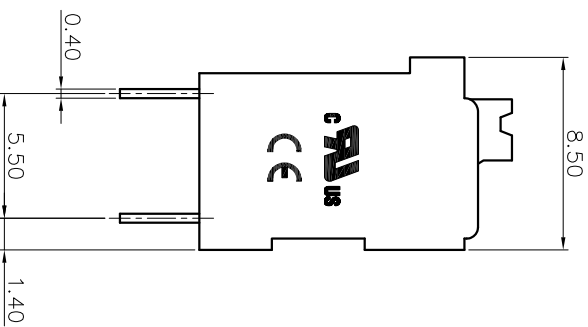
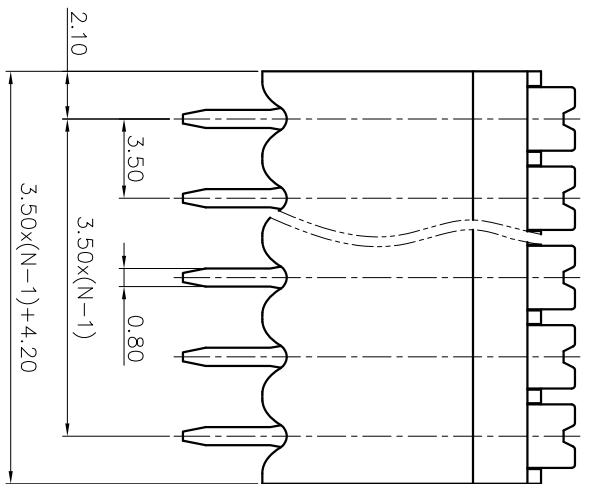
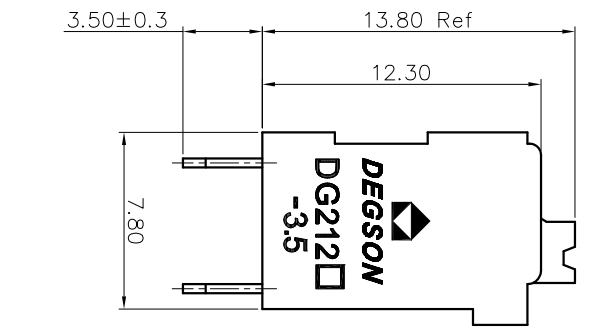




REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

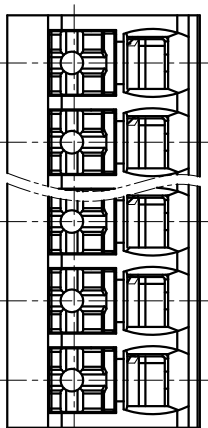

Pollution Degree	2	2	3
Overvoltage Category	II	III	III
Rate Impulse Voltage(KV)	2.5KV/2.5KV	2.5KV/2.5KV	2.5KV/2.5KV
Rate Voltage(V)	320V	160V	160V
Rate Current(A)	17.5A	17.5A	17.5A

- NOTES1:
 UL Standard
 1. Rated voltage/current : 300V / 12A
 2. Withstanding voltage : AC1600V/1Min.
 3. Wire range : 28~14AWG
 IEC Standard
 1. Pollution Degree
 2. Wire range : 0.2~1.5mm²
- NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 3.50mm, Poles : N=02~24P
 3. Stripping length : 8~9mm
 4. Operating temperature : -40°C~+130°C
 5. Undimensioned tolerances:
 6. RoHS Compliance

Pitch range in mm	Nominal dimension range in mm	Over	Over	Over	Over
6	10	30	60	100	150
TO	TO	TO	TO	TO	TO
6	10	24	30	60	100
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00
±2°	±2°	±2°	±2°	±2°	±2°

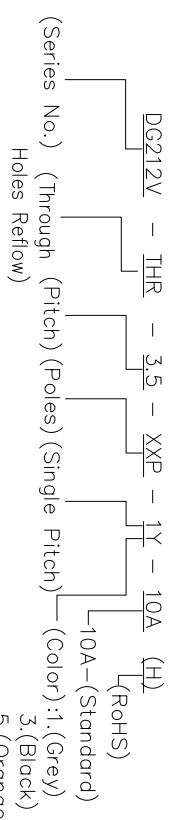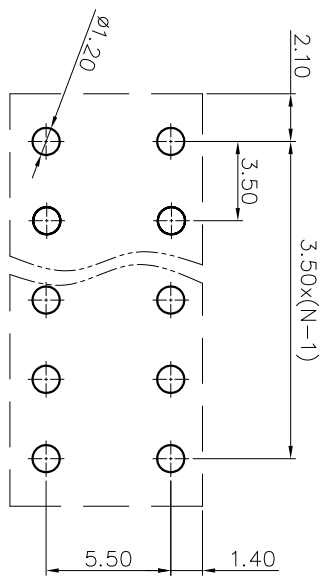

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	