

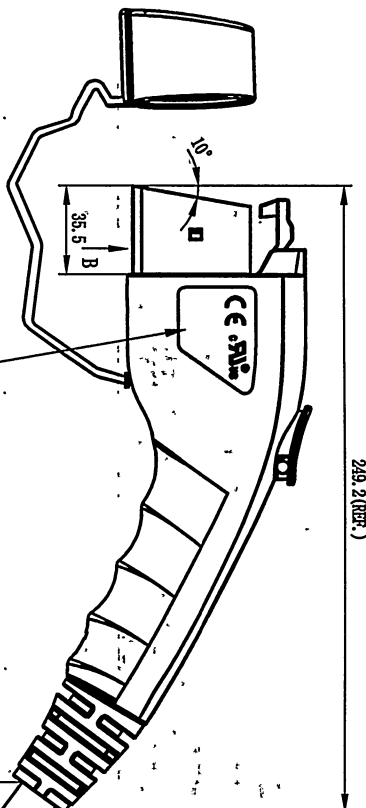



REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

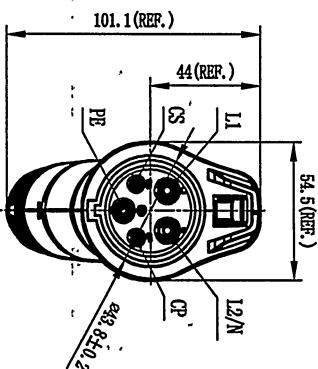

Wiring diagram


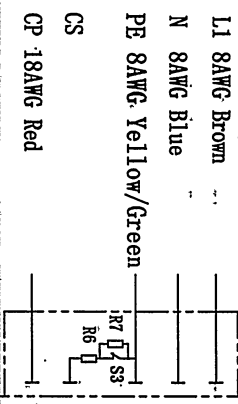


R6=150Ω±3%
R7=330Ω±3%



CE .AVC
Laser Printing Front Note:

Laser Printing Back Note (Arial):
MAC-S-040A-V-03-6, IM-11AH
40A 240V AC
SAF-J1772:2017
Type 3S
201xxxx-xxxx

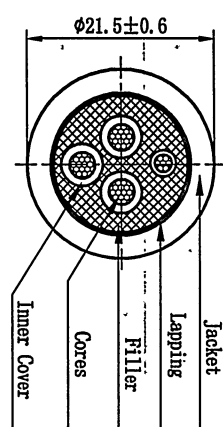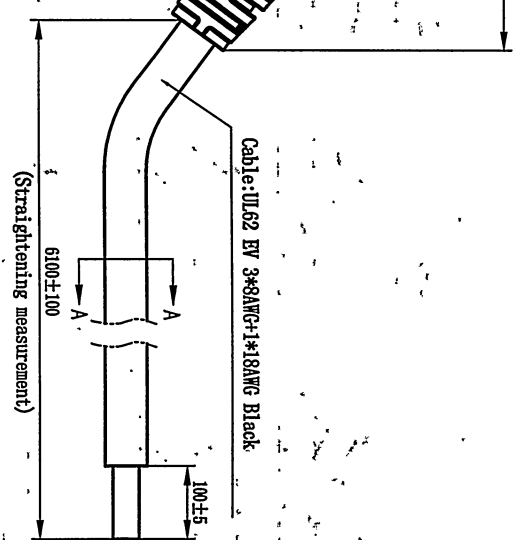

SEC A-A

MAACSO40AV036, IM11AH

Housing Colour

Technical parameters	
Rated voltage	240V AC
Rated current	40A
Temperature range	-30℃~+50℃
Insulate resistance	>5MΩ, 500V DC 1Min
Withstanding voltage	L, N AND PE, 2500V AC 1Min
Ingress protection	Type 3S
The insertion/pullout times	10000 TIMES
Insertion/pullout force	<75N
Reference standard	SAFJ1772:2017

Customer Drawing

Size Measure Range	.XX	.X
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
Angle Measure Range	±0.5°	±1.0°

PART NO.:		NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	ZK 20190924	Vehicle Connector (40A AC single phase)
CHRD:		MAAC-S-040A-V-03-6, IM-11AH
DWTR:	XF L10 2019-09-10	
DRAWING NO.:		REV
THIRD ANGLE PROJECTION		SCALE
		1:3