



3D8A1_3UP series

3W Single & Dual Output - Fixed Input - Isolated & Semi-regulated SIP Package

DC-DC Converter 3 Watt

- + 8Pin DIP Package
- + No load input current as low as 8mA
- + Continuous short circuit protection
- + High efficiency up to 88%
- + Unregulated output types
- + 3kVDC isolation
- + Operating Temperature: -40°C to +105°C
- + Industry Standard Pinout
- + Meets IEC62368, UL62368, EN62368 approvals

The Introducing our cutting-edge 3D8A1_3UP series in a 8Pin DIP Package, designed to elevate your electronic projects with unmatched performance and reliability. Experience the advantage of incredibly low no-load input current, reduced to as low as 8mA, ensuring efficient energy usage and cost savings. Our package offers continuous short circuit protection, safeguarding your devices and extending their lifespan. Achieve high efficiency levels of up to 88%, maximizing the output while minimizing energy wastage. The unregulated output types cater to a variety of applications, providing versatility and adaptability in your designs. With a robust 3kVDC isolation, our package ensures superior protection against electrical disturbances, maintaining the integrity of your circuits. Engineered to perform in extreme conditions, our package operates seamlessly within a wide temperature range of -40°C to +105°C.



UL-62368-1 (E347551)

Common specifications					
Item	Test condition	Min	Typ	Max	Units
Switching frequency	Full load, nominal input		250		kHz
Operation temperature	(with derating)	-40		+105	°C
Storage temperature		-55		+125	°C
Humidity	Non condensing			95	%
Cooling	Free air convection				
Case material	DAP				
MTBF	MIL-HDBK-217F@25°C	3500000			hours
Weight			1.9		g
Dimensions		12.70 x 10.16 x 7.50			mm

Input specifications					
Item	Test condition	Min	Typ	Max	Units
Voltage range	Vo, Io Nom		±10		%
Input filter	Capacitor				

Isolation specifications					
Item	Test condition	Min	Typ	Max	Units
Isolation capacitance	Input-output, 100kHz/0.1V		20		pF
Isolation resistance	500VDC	3000			MΩ

Output specifications					
Item	Test condition	Min	Typ	Max	Units
Voltage tolerance	100% full load			±5	%
Short circuit protection		Continuous			
Line regulation	For 1.0% of Vin		1.2		%
Load regulation	5V (10% to 100% F.L.)		9	15	%
	12V (10% to 100% F.L.)		7	10	%
	15V (10% to 100% F.L.)		6	10	%
Ripple & noise	24V (10% to 100% F.L.)		5	10	%
	BW = DC to 20MHz		100	150	mVp-p

Example:
3D8A1_0505S3UP
 3 = 3Watt; D8 = DIP8; A1 = Series; 05 = 5Vin; 05 = 5Vout; S = Single Output; 3 = 3kVDC isolation; U = Unregulated Output; P = Short circuit protected

EMC specifications		
CE	CISPR32/EN55032	CLASS B (see Fig. 1 for recommended circuit)
RE	CISPR32/EN55032	CLASS B (see Fig. 1 for recommended circuit)
ESD	IEC/EN61000-4-2 Air ±8kV , Contact ±4kV perf. Criteria B	

- Note:
- Operation under minimum load will not damage the converter; However, they may not meet all specification listed, and that will reduce the life of product.
 - All specifications measured at Ta = 25°C, humidity <95%, nominal input voltage and rated output load unless otherwise specified.
 - Measured Input reflected ripple current with a simulated source inductance of 12μH and a source capacitor
 - Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating
 - Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.

3D8A1_3UP series

3W Single & Dual Output - Fixed Input - Isolated & Semi-regulated
SIP Package


Product Selection Guide

Part Number	Output Voltage [VDC]	Output Current [Full Load mA, max]	Efficiency [@FL, %, max]	CapacitorLoad [@FL, μ F]
3D8A1_1205S3UP	5	600	85	1000
3D8A1_1212S3UP	12	250	87	220
3D8A1_1215S3UP	15	200	88	220
3D8A1_1224S3UP	24	125	88	47
3D8A1_1505S3UP	5	600	85	1000
3D8A1_1512S3UP	12	250	87	220
3D8A1_1515S3UP	15	200	88	220
3D8A1_1524S3UP	24	125	88	47
3D8A1_2405S3UP	5	600	85	1000
3D8A1_2412S3UP	12	250	87	220
3D8A1_2415S3UP	15	200	88	220
3D8A1_2424S3UP	24	125	88	47


Part Number	Output Voltage [VDC]	Output Current [Full Load mA, max]	Efficiency [@FL, %, max]	CapacitorLoad [@FL, μ F]
3D8A1_1205D3UP	\pm 5	\pm 300	86	\pm 560
3D8A1_1212D3UP	\pm 12	\pm 125	86	\pm 100
3D8A1_1215D3UP	\pm 15	\pm 100	88	\pm 100
3D8A1_1224D3UP	\pm 24	\pm 63	88	\pm 22
3D8A1_1505D3UP	\pm 5	\pm 300	86	\pm 560
3D8A1_1512D3UP	\pm 12	\pm 125	86	\pm 100
3D8A1_1515D3UP	\pm 15	\pm 100	88	\pm 100
3D8A1_1524D3UP	\pm 24	\pm 63	88	\pm 22
3D8A1_2405D3UP	\pm 5	\pm 300	86	\pm 560
3D8A1_2412D3UP	\pm 12	\pm 125	86	\pm 100
3D8A1_2415D3UP	\pm 15	\pm 100	88	\pm 100
3D8A1_2424D3UP	\pm 24	\pm 63	88	\pm 22

Typical characteristics

Temperature derating graph

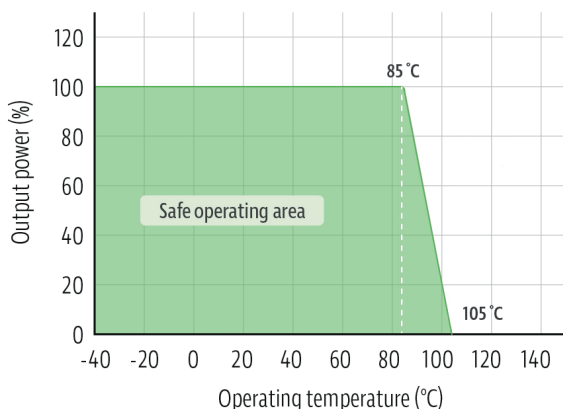


Tolerance envelope graph

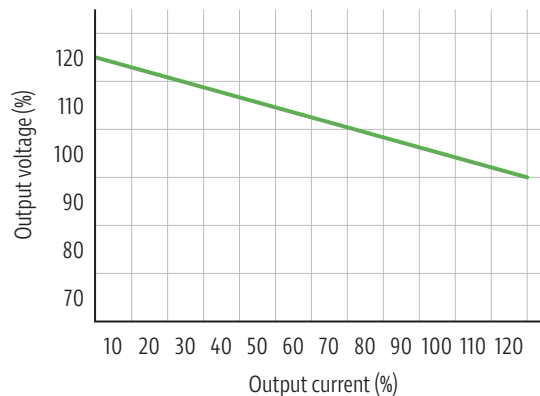

3D8A1_3UP series



3W Single & Dual Output - Fixed Input - Isolated & Semi-regulated
SIP Package

Recommended Test Circuit

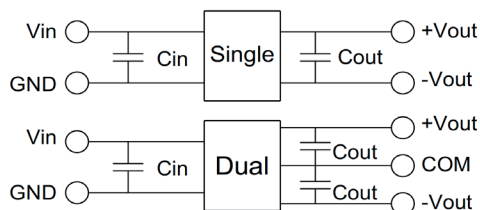



Vin	Cin	Single Vout	Cout	Dual Vout	Cout
12VDC	2.2μF/25V	5VDC	10μF/16V	±5VDC	±4.7μF/16V
15VDC	2.2μF/25V	9VDC	2.2μF/16V	±9VDC	±1μF/16V
24VDC	1μF/50V	12VDC	2.2μF/25V	±12VDC	±1μF/25V
--	--	15VDC	1μF/25V	±15VDC	±1μF/25V
--	--	24VDC	1μF/50V	±24VDC	±1μF/50V

EMC (CLASS B) compliance circuit

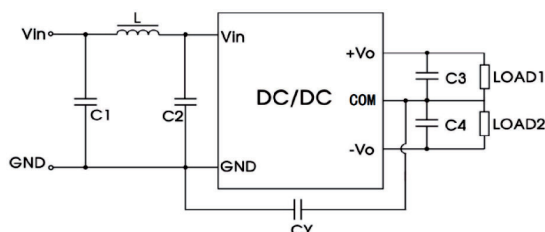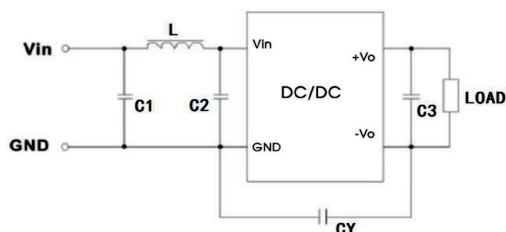

EMC recommended circuit value table		
EMI	C1	10μF /50V
	C2	10μF /50V
	CY	1nF/4kV
	C3, C4	Recommended Test Circuit
	L	6.8μH

Markings and dimensions

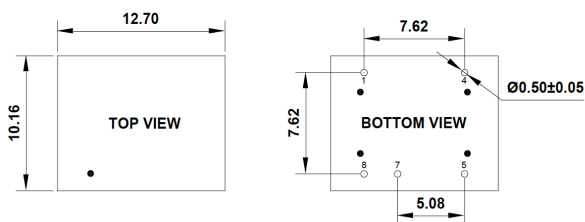

PIN Connection							
PIN	1	2	3	4	5	7	8
Single	-Vin			+Vin	+Vout	-Vout	No Pin
Dual	-Vin			+Vin	+Vout	Com	-Vout