

## Single Phase Glass Passivated Silicon Bridge Rectifier

$V_{RRM} = 50\text{ V} - 400\text{ V}$

$I_O = 15\text{ A}$


### Features

- Epoxy Resin material compliant with 94V-0 standards of UL UL Material Flammability Provisions
- Compliant with UL Provisions, UL Code: E303851
- Ideal for printed circuit boards
- High surge overload rating
- High temperature soldering guaranteed: 260°C/ 10 seconds, 9.5 mm lead length
- Not ESD Sensitive

### Mechanical Data

- Case: Epoxy resin body over passivated junctions
- Weight: 4.60 g
- Mounting position: Any

GBU Package



### Maximum ratings at $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Conditions	GBU15A	GBU15B	GBU15D	GBU15G	Unit
Repetitive peak reverse voltage	$V_{RRM}$		50	100	200	400	V
RMS reverse voltage	$V_{RMS}$		35	70	140	280	V
DC blocking voltage	$V_{DC}$		50	100	200	400	V
Operating temperature	$T_j$		-40 to 150	-40 to 150	-40 to 150	-40 to 150	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-40 to 150	-40 to 150	-40 to 150	-40 to 150	$^\circ\text{C}$

### Electrical characteristics at $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Single phase, half sine wave, 50 Hz, resistive load

For capacitive load derate current by 20%


Parameter	Symbol	Conditions	GBU15A	GBU15B	GBU15D	GBU15G	Unit
Maximum forward rectified current	$I_O$	$T_C = 100\text{ }^\circ\text{C}$	15 <sup>(1)</sup>	15 <sup>(1)</sup>	15 <sup>(1)</sup>	15 <sup>(1)</sup>	A
		$T_A = 25\text{ }^\circ\text{C}$	3.8 <sup>(2)</sup>	3.8 <sup>(2)</sup>	3.8 <sup>(2)</sup>	3.8 <sup>(2)</sup>	
Peak forward surge current	$I_{FSM}$	$t_p = 10\text{ ms}, T_j = 25\text{ }^\circ\text{C}$	250	250	250	250	A
Maximum forward voltage drop	$V_F$	$I_F = 7.5\text{ A}$	1.05	1.05	1.05	1.05	V
Maximum reverse current at rated DC blocking voltage	$I_R$	$T_A = 25\text{ }^\circ\text{C}$	5	5	5	5	$\mu\text{A}$
		$T_A = 125\text{ }^\circ\text{C}$	500	500	500	500	
Insulation strength (lead wire to case)	$V_{dis}$	AC voltage: 1 min leakage current < 1mA	2.5	2.5	2.5	2.5	kV
Rating for fusing at $T_j = 25\text{ }^\circ\text{C}$	$I^2t$	$1\text{ ms} < t_p < 10\text{ ms}$	80	80	80	80	$\text{A}^2\text{s}$
Typical thermal resistance	$R_{\theta JA}$		22 <sup>(2)</sup>	22 <sup>(2)</sup>	22 <sup>(2)</sup>	22 <sup>(2)</sup>	$^\circ\text{C/W}$
	$R_{\theta JC}$		5.0 <sup>(1)</sup>	5.0 <sup>(1)</sup>	5.0 <sup>(1)</sup>	5.0 <sup>(1)</sup>	
Mounting Torque	M		0.8 (0.5 N.m is recommended)				N.m

<sup>1</sup> - Device mounted on 65 mm x 35 mm x 1.5 mm heatsink


<sup>2</sup> - Device mounted on PCB without heatsink

<sup>3</sup> - Recommended mounted position is to bolt down device on a heatsink with silicon thermal compound for maximum heat transfer using M3 screw.


**Fig.1: Current Derating Curve**

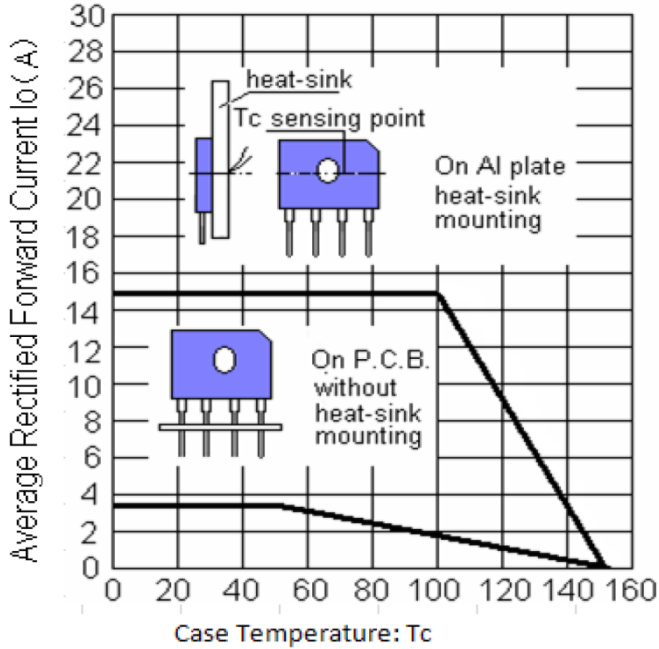


**Fig.2: Typical Reverse Characteristics**

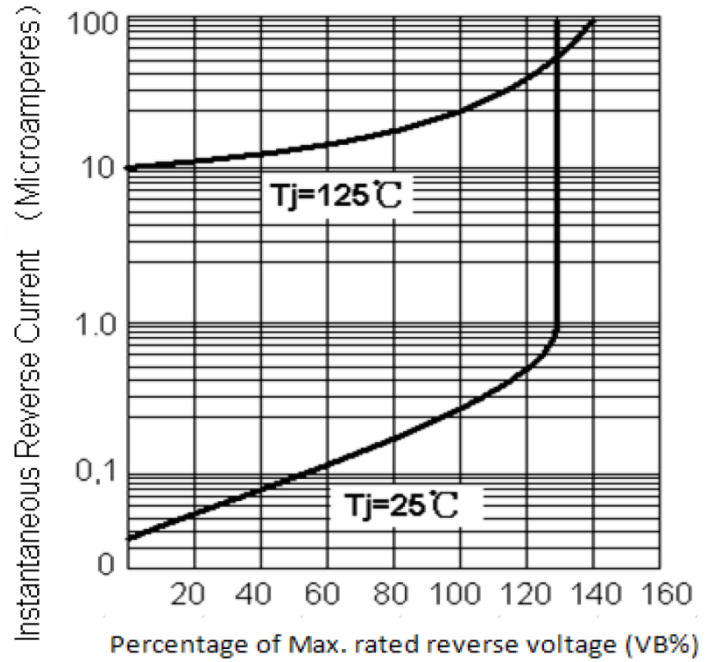

**Fig.3: Max. Surge Current**

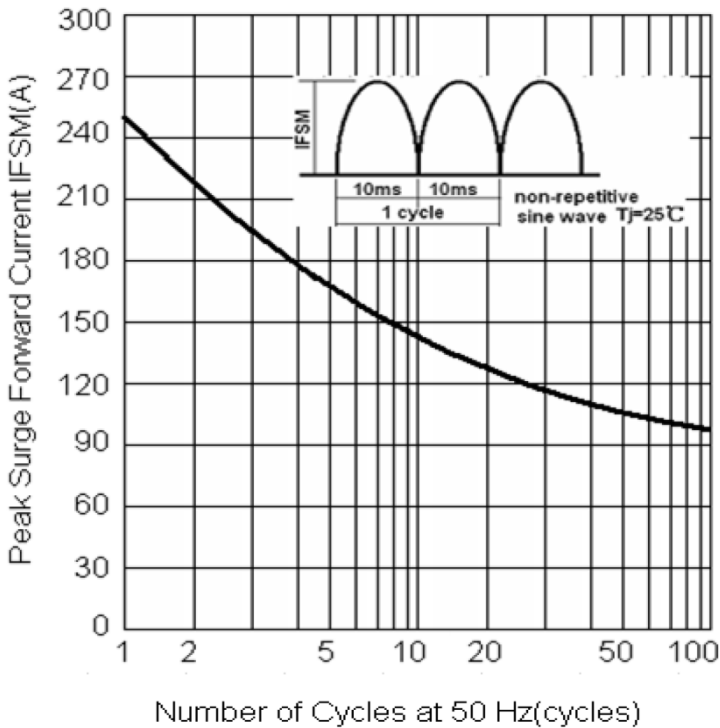

**Fig.4: Rated Forward Features**

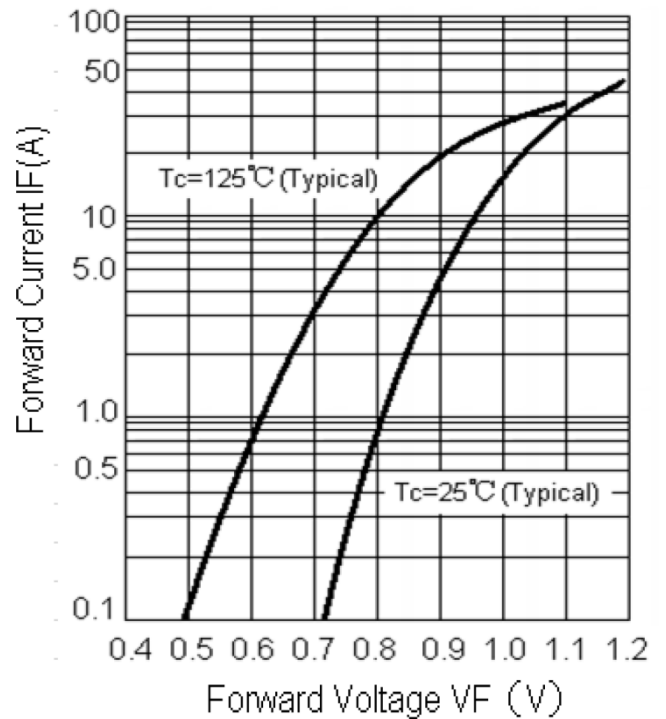

**Package dimensions and terminal configuration**

Product is marked with part number and terminal configuration.

**GBU**

