

## Single Phase Glass Passivated Silicon Bridge Rectifier

$V_{RRM} = 600\text{ V} - 1000\text{ V}$   
 $I_O = 25\text{ A}$

### Features

- Integrally molded heat sink provides low thermal resistance for maximum heat dissipation
- High surge current capability
- Universal 3-way terminals: snap on, wire-around, or P.C board mounting
- High temperature soldering guaranteed: 260°C/ 10 seconds at 5 lbs (2.3 kg) tension
- Not ESD Sensitive

### Mechanical Data

Case: Molded plastic with heat sink integrally mounted in the bridge encapsulation

Terminals: Either nickel plated 0.25". Faston lugs or copper leads 0.040" diameter.


Polarity: Polarity symbols marked on the body

Mounting position: Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface

Weight: 15 grams or 0.53 ounces

Mounting torque: 20 inch-lbs max

GBPC-T/W Package



### Maximum ratings at $T_c = 25\text{ }^\circ\text{C}$ , unless otherwise specified (GBPCXXXXT uses GBPC-T package while GBPCXXXXW uses GBPC-W package)

| Parameter                       | Symbol    | Conditions | GBPC2506T/W | GBPC2508T/W | GBPC2510T/W | Unit             |
|---------------------------------|-----------|------------|-------------|-------------|-------------|------------------|
| Repetitive peak reverse voltage | $V_{RRM}$ |            | 600         | 800         | 1000        | V                |
| RMS reverse voltage             | $V_{RMS}$ |            | 420         | 560         | 700         | V                |
| DC blocking voltage             | $V_{DC}$  |            | 600         | 800         | 1000        | V                |
| Operating temperature           | $T_j$     |            | -55 to 150  | -55 to 150  | -55 to 150  | $^\circ\text{C}$ |
| Storage temperature             | $T_{stg}$ |            | -55 to 150  | -55 to 150  | -55 to 150  | $^\circ\text{C}$ |

### Electrical characteristics at $T_c = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Single phase, half sine wave, 60 Hz, resistive or inductive load

For capacitive load derate current by 20%

| Parameter   | Symbol          | Conditions  | GBPC2506T/W | GBPC2508T/W | GBPC2510T/W | Unit                   |
|---|-----------------|---|-------------|-------------|-------------|------------------------|
| Maximum average forward rectified current                       | $I_O$           | $T_c = 50\text{ }^\circ\text{C}$                                      | 25.0        | 25.0        | 25.0        | A                      |
| Peak forward surge current                                      | $I_{FSM}$       | single sine-wave  | 300         | 300         | 300         | A                      |
| Maximum instantaneous forward voltage drop per leg              | $V_F$           | $I_F = 12.5\text{ A}$   | 1.1         | 1.1         | 1.1         | V                      |
| Maximum DC reverse current at rated DC blocking voltage per leg | $I_R$           | $T_a = 25\text{ }^\circ\text{C}$<br>$T_a = 125\text{ }^\circ\text{C}$ | 5<br>500    | 5<br>500    | 5<br>500    | $\mu\text{A}$          |
| Rating for fusing   | $I^2t$          | $1\text{ ms} < t_m < 8.3\text{ ms}$                                   | 375         | 375         | 375         | $\text{A}^2\text{sec}$ |
| RMS isolation voltage from case to leads                        | $V_{ISO}$       |   | 2500        | 2500        | 2500        | V                      |
| Typical junction capacitance                                    | $C_j$           |   | 300         | 300         | 300         | pF                     |
| Typical thermal resistance                                      | $R_{\theta JC}$ |   | 1.9         | 1.9         | 1.9         | $^\circ\text{C/W}$     |

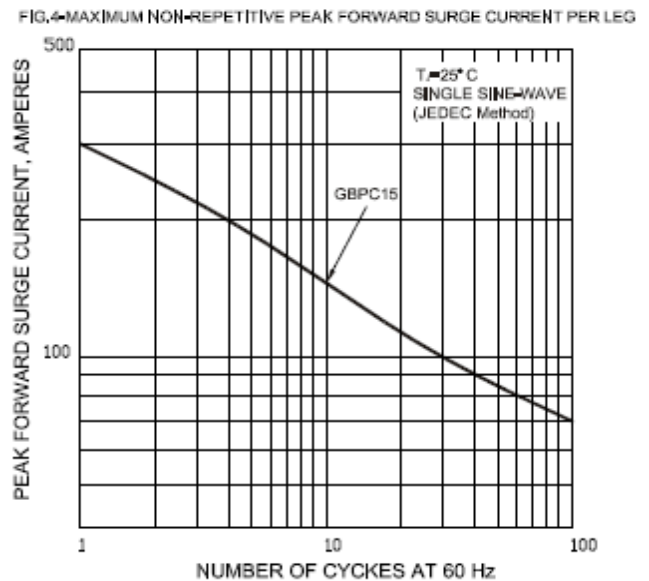
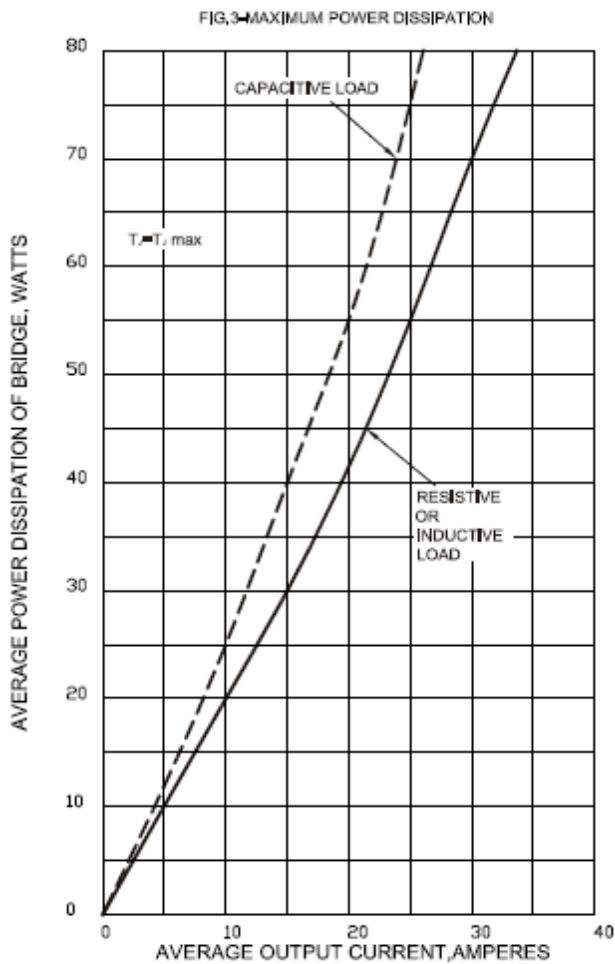
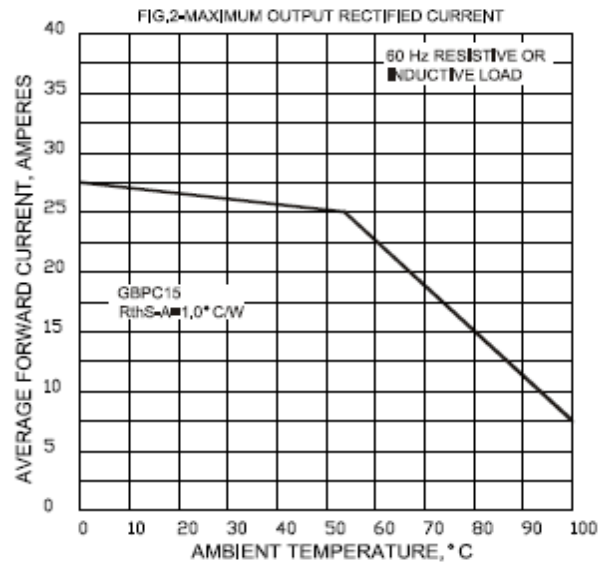
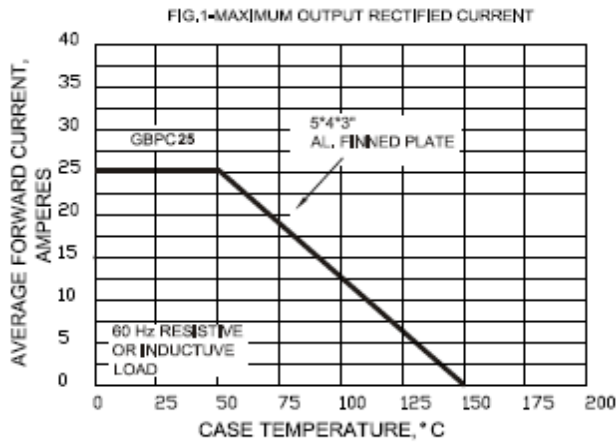


FIG.5-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

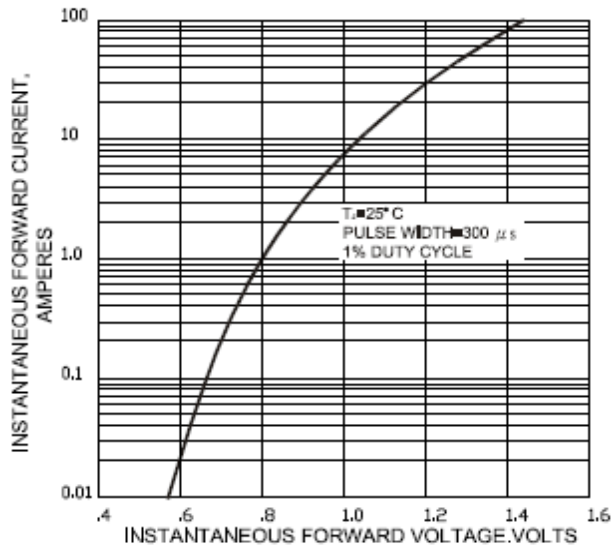


FIG.6-TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

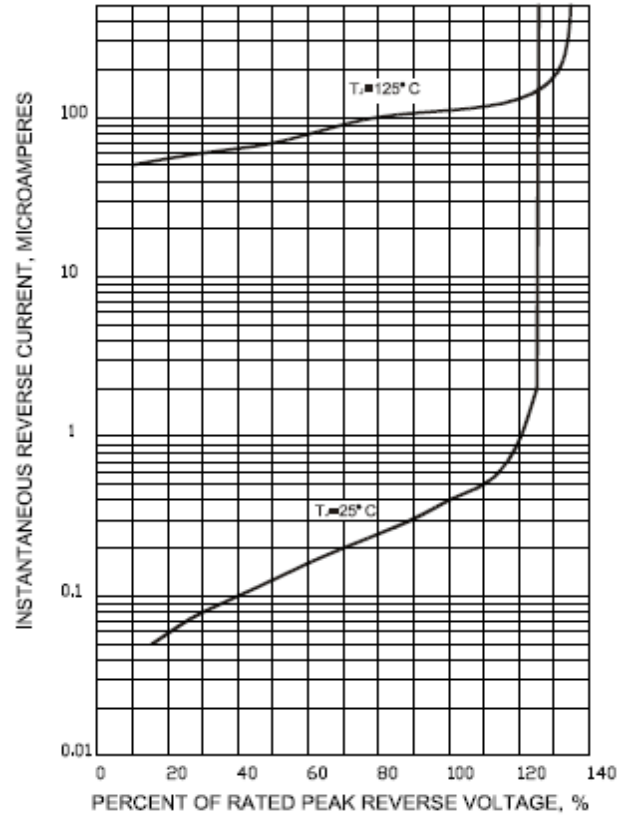


FIG.7-TYPICAL JUNCTION CAPACITANCE PER LEG



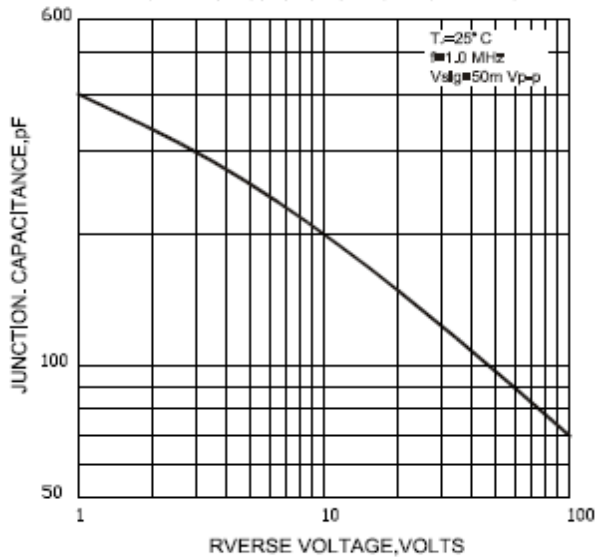


FIG.8-TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

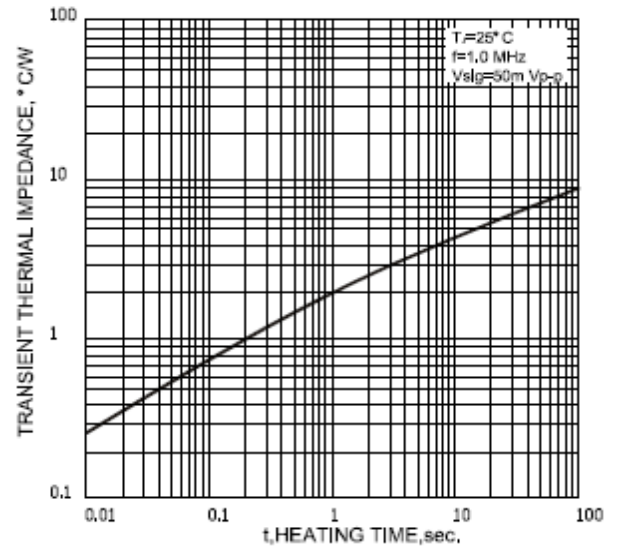

**Package dimensions and terminal configuration**

Product is marked with part number and terminal configuration.

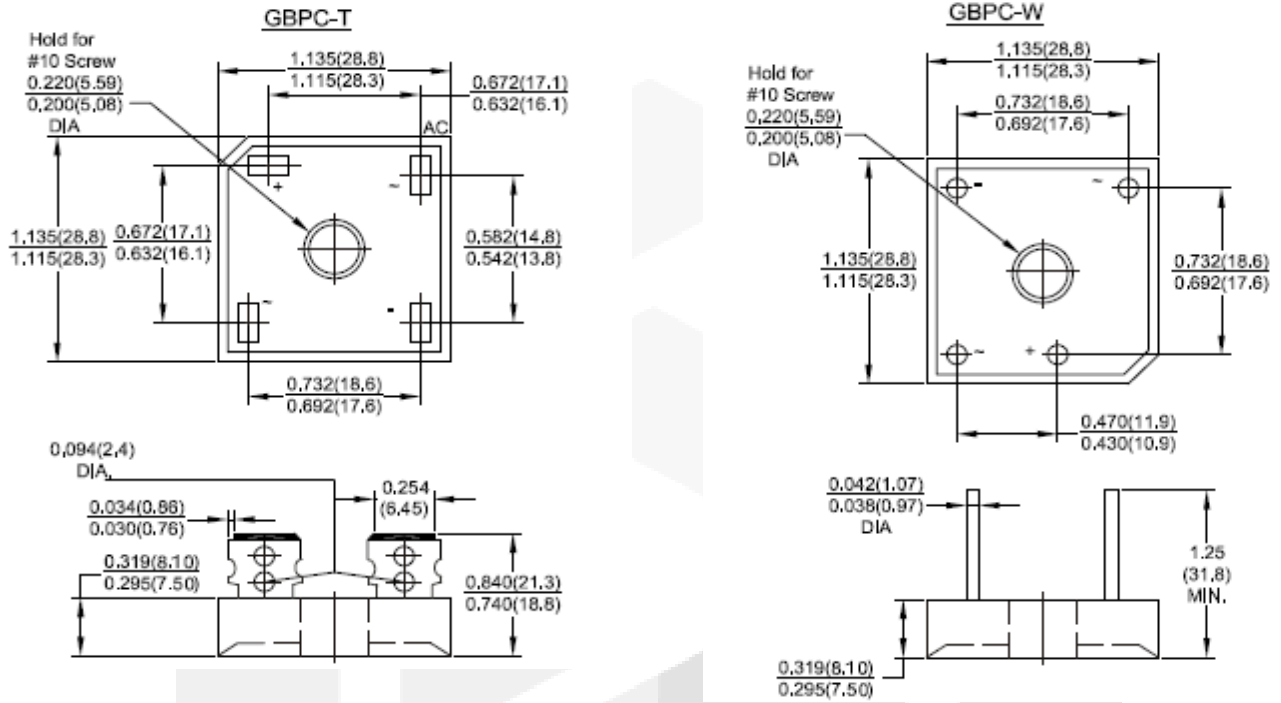

Dimensions in inches and (millimeters)

