




Hutton Close, Crowther Ind Est, Washington, Tyne & Wear NE38 0AH, England  
<mailto:sales@isocom.uk.com> - Tel: +44 (0)191 4166546 - Fax: +44 (0)191 4155055

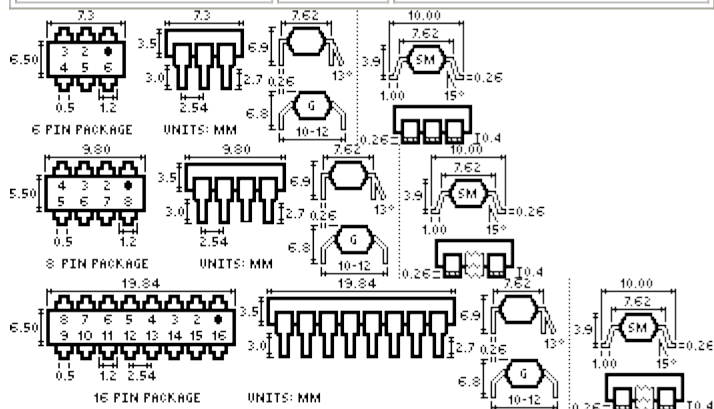
- [Circuit](#)
- [Features](#)
- [Description](#)
- [Absolute Maximum Ratings](#)
- [Electrical Characteristics](#)

[Home Page](#)

## IS74, ISD74, ISQ74 OPTICALLY COUPLED ISOLATOR

### Circuit

	IS74	<a href="#">Similar Optocouplers</a>
	ISD74	<a href="#">Similar Optocouplers</a>
	ISQ74	<a href="#">Similar Optocouplers</a>



### Features

- 1500 V Isolation
- High Current Transfer Ratio 50% typical
- Low Cost Dual-In-Line Package
- Single, Dual or Quad Configuration

## Description

The ISD74 and ISQ74 is each an optically coupled isolator. Each channel consists of a Gallium Arsenide infrared emitting diode and an NPN silicon phototransistor mounted in a standard dual-in-line package. Surface Mount Option Available.

All electrical parameters are 100% tested by manufacturing. Specifications are guaranteed to a cumulative 0.65% AQL.

## Absolute Maximum Ratings (Ta=25°C)

Storage Temperature:	-55°C to +150°C
Operating Temperature:	-55°C to +100°C
Lead Soldering:	260°C for 10s, 1.6mm from case
Input-to-Output Isolation Voltage:	±1500Vdc ( <a href="#">note 1</a> )

## Input Diode

Forward DC Current:	60mA
Reverse DC Voltage:	3V
Peak Forward Current:	1A (p.w.=100µs, duty ratio 0.001)
Power Dissipation:	100mW
Derate Linearly:	1.33mW/°C above 25°C

## Output Transistor

Collector-Emitter Voltage:	20V (IS74, ISQ74) 30V (ISD74)
Power Dissipation:	150mW 2.00mW/°C above 25°C

## Package

Total Power Dissipation:	200mW (IS74) 400mW (ISD74) 500mW (ISQ74)
Derate Linearly:	6.67mW/°C above 25°C

## Electro-optical Characteristics (Ta=25°C)

INPUT	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
$V_F$	Forward Current	$I_F=60\text{mA}$		1.3	1.5	V
$I_R$	Reverse Current	$V_R=3\text{V}$			10	$\mu\text{A}$
<b>OUTPUT</b>						
$BV_{CEO}$	Collector-Emitter Voltage	$I_C=1\text{mA}$	20	45		V
$I_{CEO}$	Collector-Emitter Dark Current	$V_{CE}=5\text{V}$		3	500	nA
<b>COUPLED</b>						
$I_C/I_F$	DC Current Transfer Ratio	$I_F=16\text{mA}, V_{CE}=5\text{V}$	12.5	50		%
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage	$I_F=16\text{mA}, I_C=2.0\text{mA}$		0.3	0.5	V
$C_F$	Floating Capacitance	$V=0, f=1\text{MHz}$		0.6	1	pF
	Input-Output Isolation Resistance	$V_{IO}=500\text{V}, (\text{note } 1)$	500			Gohm

## Notes

1. Measured with input leads shorted together and output leads shorted together.

Isocom takes great effort to ensure accurate data, but regrettably cannot be held liable for any error on its website. Visit [File Lists](#) to confirm old printouts are up-to-date.

[Contents](#)