


Hutton Close, Crowther Ind Est, Washington, Tyne & Wear NE38 0AH, England
<mailto:sales@isocom.uk.com> - Tel: +44 (0)191 4166546 - Fax: +44 (0)191 4155055

- [Circuit](#)
- [Features](#)
- [Description](#)
- [Absolute Maximum Ratings](#)
- [Electrical Characteristics](#)

- [Similar Optocouplers](#)
- [Home Page](#)

ISQ201: OPTICALLY COUPLED ISOLATORS

Circuit

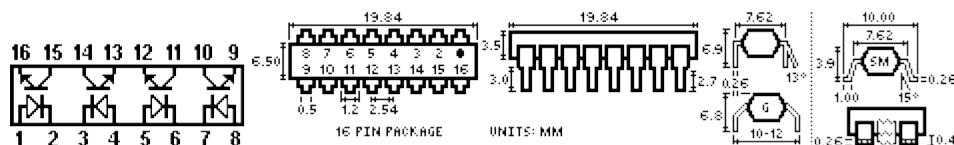

Features

- 5000 V Isolation.
- High Current Transfer Ratio 75% min.
- Low Cost Dual-In-Line Package.
- Quad Configuration.

Description

The ISQ201 is an optically coupled isolator. Each channel consists of a Gallium Arsenide infrared emitting diode and an NPN silicon phototransistor mounted in a standard 16-pin dual-in-line package. Surface Mount Option Available.

The ISQ201 offers four channels per unit.

All electrical parameters are 100% tested by manufacturing. Specifications are guaranteed to a cumulative 0.65% AQL.

Absolute Maximum Ratings (Ta=25°C)

Storage Temperature:	-55°C to +150°C
Operating Temperature:	-55°C to +100°C
Lead Soldering:	260°C for 10s, 1.6mm from case
Input-to-Output Isolation Voltage:	±5000Vdc (note 1)

Input Diode

Forward DC Current:	60mA
Reverse DC Voltage:	3V
Peak Forward Current:	1A (PW.=100µs, duty ratio 0.001)
Power Dissipation:	100mW
Derate Linearly:	1.33mW/°C above 25°C

Output Transistor

Collector-Emitter Voltage:	30V
Emitter-Collector Voltage:	7V
Power Dissipation:	150mW
Derate Linearly:	2.00mW/°C above 25°C

Package

Total Power Dissipation:	500mW
Derate Linearly:	6.67mW/°C above 25°C

Electro-optical Characteristics (Ta=25°C)

INPUT	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
V _F	Forward Current	I _F =20mA		1.2	1.5	V
		I _F =1mA		1	1.2	V
I _R	Reverse Current	V _R =3V			10	µA
OUTPUT						
H _{FE}		I _C =100µA, V _{CE} =5V	100	200		
BV _{CEO}	Collector-Emitter Voltage	I _C =1mA	30	50		V
BV _{ECO}	Emitter-Collector Voltage	I _E =0.1mA	7	9		V
I _{CEO}	Collector-Emitter Dark Current	V _{CE} =10V			50	nA
COUPLED	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
CTR	DC Current Transfer Ratio	I _F =10mA, V _{CE} =10V	75			%
		I _F =1mA, I _C =10V	10	20		%
V _{CE(SAT)}	Collector-Emitter Saturation Voltage	I _F =10mA, I _C =2mA		0.2	0.4	V
C _F	Floating Capacitance	V=0, f=1MHz		0.6	1	pF
	Input-Output Isolation Resistance	V _{IO} =500V, (note 1)	5E11			ohm

Notes

1. Measured with input leads shorted together and output leads shorted together.

Isocom takes great effort to ensure accurate data, but regrettably cannot be held liable for any error on its website. Visit [File Lists](#) to confirm old printouts are up-to-date.

[Contents](#)