


KEMET Part Number: T213C116K035CS
(M39003/04-4066{KEM}, CSR91F116KC)

Tantalum, MnO2 Tantalum, Military/High Reliability, KEMET, T213_CSR91, 11 uF, 10%, 35 V

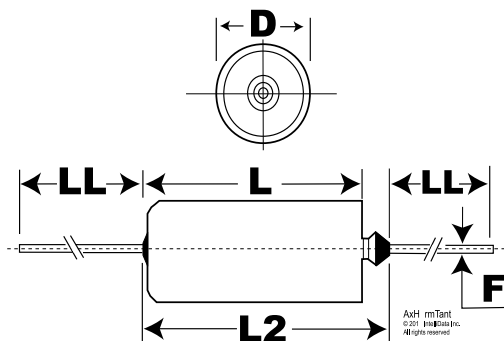

Dimensions	
D	7.98mm +0.25/-0.38mm
L	34.29mm +/-0.79mm
L2	38.74mm
LL	38.1mm +/-6.35mm
F	0.64mm +/-0.05mm
G	2.225mm NOM

Packaging Specifications	
Packaging:	Bulk, Card
Packaging Quantity:	10

General Information	
Dielectric:	MnO2 Tantalum
Style:	Axial Hermetic
Supplier:	KEMET
Series:	T213_CSR91
Description:	Axial, Solid Tantalum, Hermetically Sealed, Military (Non-ER)
Features:	BiPolar, Low Leakage, Low DF
RoHS:	No
Termination:	Lead (SnPb)
Lead:	Wire Leads, Uninsulated
Construction:	Hermetic
Miscellaneous:	CSR91s Are Non-Polar And May Be Placed In A Circuit Either Direction
Notes:	Dimensions Include Insulating Sleeve (Standard)

Specifications	
Capacitance:	11 uF
Capacitance Tolerance:	10%
Voltage DC:	35 VDC (85C), 28 VDC (125C Surge), 0.35 V (125C Reverse)
Temperature Range:	-55/+125C
Failure Rate:	C (0.01%/1000 Hrs)
Leakage:	4 uAmps
Testing and Reliability:	Standard Testing To MIL-PRF-39003