


KEMET Part Number: T340E226M050AS
(T340E226M050AH)

Tantalum, MnO2 Tantalum, Commercial Grade, KEMET, T340, 22 uF, 20%, 50 V, 1.3 Ohms, Lead Spacing = 10mm

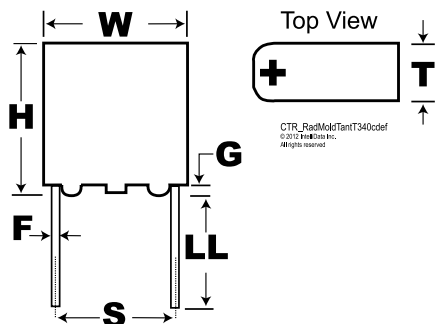

General Information

Dielectric:	MnO2 Tantalum
Style:	Radial Molded
Supplier:	KEMET
Series:	T340
Description:	Radial, Solid Tantalum, Molded
RoHS:	No
Termination:	Lead (SnPb)
Construction:	Molded
Notes:	Longest Lead Is Positive

Dimensions

W	12.3mm MAX
H	10.5mm MAX
T	12.3mm MAX
S	10mm +/-0.5mm
LL	15mm +/-2mm
F	0.64mm +/-0.03mm
G	0.38mm +/-0.13mm

Specifications

Capacitance:	22 uF
Capacitance Tolerance:	20%
Voltage DC:	50 VDC (85C), 41 VDC (125C Surge), 0.5 V (125C Reverse)
Temperature Range:	-55/+125C
Dissipation Factor:	6%
Resistance:	1.3 Ohms (100kHz)
Leakage:	10 uAmps

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	50