


2W, Fixed input voltage, isolated & unregulated single output

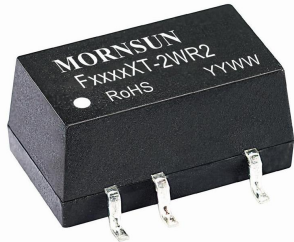

Continuous Short  
Circuit Protection

Patent Protection RoHS

FEATURES

- | Ultra Compact SMD package
- | Isolation voltage: 3KVDC
- | Operating temperature range: -40°C to +105°C
- | Efficiency up to 86%
- | Internal SMD construction
- | No external component required
- | International standard pin-out

F\_XT-2WR2 series is specially designed for applications where an isolated voltage is required in a distributed power supply system. It is suitable for:

1. Where the voltage of the input power supply is stable (voltage variation:  $\pm 10\%V_{in}$ );
2. Where isolation is necessary between input and output (isolation voltage  $\leq 3000VDC$ );
3. Where do not has high requirement of line regulation and load regulation;
4. Such as: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

Selection Guide

Part No.	Input Voltage (VDC)	Output		Efficiency (%Min./Typ.) @ Full Load	Max. Capacitive Load ( $\mu F$ )
		Output Voltage (VDC)	Output Current (mA) (Max./Min.)		
F0503XT-2WR2	4.5-5.5 (5VDC nominal)	3.3	400/40	74/78	220
F0505XT-2WR2		5	400/40	75/79	
F0509XT-2WR2		9	222/22	78/82	
F0512XT-2WR2		12	167/17	78/82	
F0515XT-2WR2		15	133/13	79/83	
F0524XT-2WR2		24	83/8	80/84	
F1203XT-2WR2	10.8-13.2 (12VDC nominal))	3.3	400/40	74/78	
F1205XT-2WR2		5	400/40	75/79	
F1209XT-2WR2		9	222/22	78/82	
F1212XT-2WR2		12	167/17	78/82	
F1215XT-2WR2		15	133/13	79/83	
F1224XT-2WR2		24	83/8	80/84	
F1505XT-2WR2	13.5-16.5 (15VDC nominal)	5	400/40	75/79	
F1512XT-2WR2		12	167/17	78/82	
F1515XT-2WR2		15	133/13	79/83	
F1524XT-2WR2		24	83/8	80/84	
F2403XT-2WR2	21.6-26.4 (24VDC nominal)	3.3	400/40	74/78	
F2405XT-2WR2		5	400/40	75/79	
F2409XT-2WR2		9	222/22	78/82	
F2412XT-2WR2		12	167/17	78/82	
F2415XT-2WR2		15	133/13	79/83	
F2424XT-2WR2		24	83/8	82/86	

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	5V input	--	506/30	--	mA
	12V input	--	212/25	--	
	15V input	--	169/18	--	
	24V input	--	105/15	--	

Surge Voltage (1sec. max.)	5V input	-0.7	--	9	VDC
	12V input	-0.7	--	18	
	15V input	-0.7	--	21	
	24V input	-0.7	--	30	
Reflected Ripple Current		--	15	--	mA
Input Filter	Capacitance Filter				

### Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	See tolerance envelope graph (Fig. 1)					
Linear Regulation	Input voltage change: ±1%	3.3VDC output	--	--	±1.5	%
		Other output	--	--	±1.2	
Load Regulation	10%-100% load	3.3VDC output	--	18	--	
		5VDC output	--	12	--	
		9VDC output	--	9	--	
		12VDC output	--	8	--	
		15VDC output	--	7	--	
		24VDC output	--	6	--	
Ripple & Noise*	20MHz bandwidth		--	100	--	mVp-p
Temperature Coefficient	100% load		--	--	±0.03	%/°C
Short Circuit Protection	Continuous, self-recovery					

Note: \* Ripple and noise are measured by "parallel cable" method, please see DC-DC Converter Application Notes for specific operation.

### General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA.		3000	--	--	VDC
Insulation Resistance	Input-output, isolation voltage 500VDC.		1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V.		--	20	--	pF
Operating Temperature	3.3V/5V output	Derating when operating temperature up to 71°C, (see Fig.2).	-40	--	105	°C
	Other output	Derating when operating temperature up to 85°C, (see Fig.2).				
Storage Temperature			-55	--	125	
Casing Temperature Rise During Operating	Ta=25°C		--	25	--	
Hand Soldering	Welding spot is 1.5mm away from the casing, 10 seconds.		--	--	300	
Storage Humidity	Non-condensing		--	--	95	
Switching Frequency	100% load, nominal input voltage.		--	100	300	KHz
MTBF	MIL-HDFK-217F@25°C		3500	--	--	K hours

### Physical Specifications

Casing Material	Epoxy resin (UL94-V0)
Dimensions	12.70*11.20*7.25mm
Weight	1.5g (Typ.)
Cooling	Free convection

### EMC Specifications

EMI	Conducted emission	CISPR22/EN55022	CLASS B (see Fig. 4 for recommended circuit)
	Radiated emission	CISPR22/EN55022	CLASS B (see Fig. 4 for recommended circuit)
EMS	Electrostatic discharge	IEC/EN61000-4-2	Contact ±8KV perf. Criteria B

Product Characteristic Curve

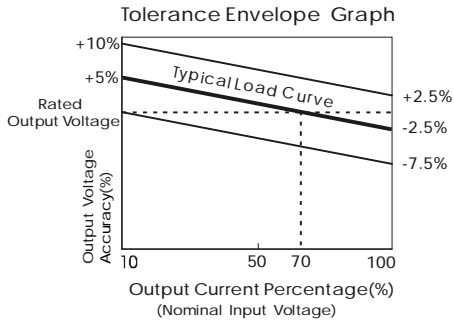


Fig. 1






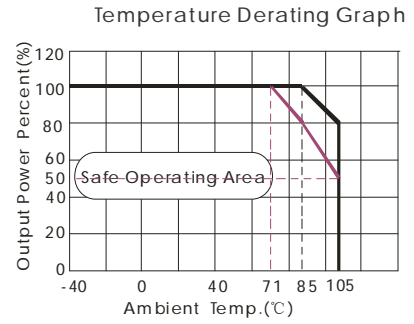


Fig. 2

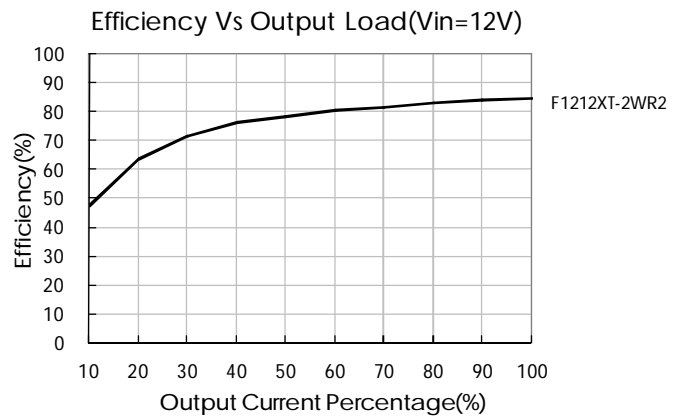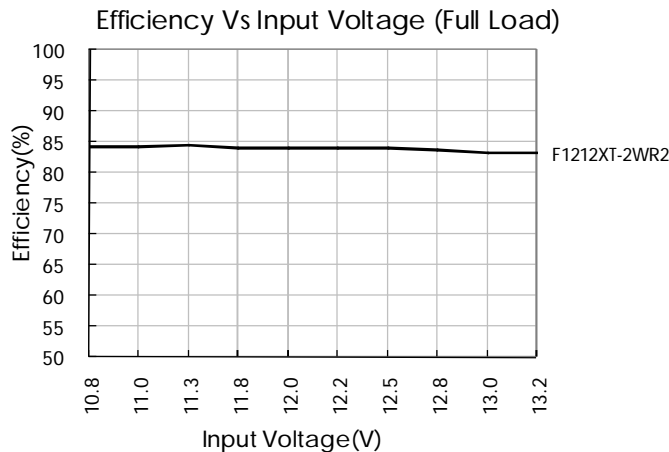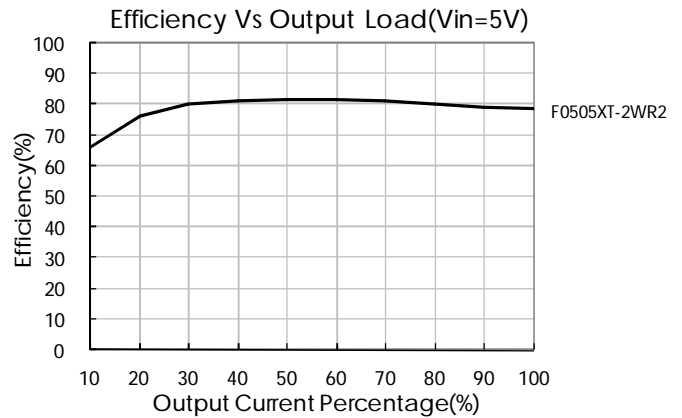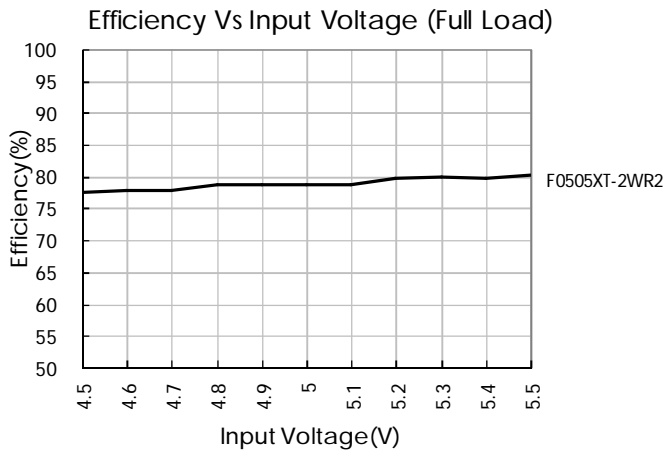

Specific reflow soldering process can refer to IPC/JEDEC J-STD-020D. The recommended reflow soldering profile of our products is as below:  
Note: the profile is only suitable for hot air reflow soldering.

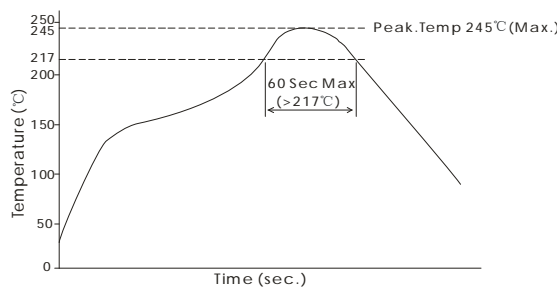

Design Reference

1. Typical application

If it is required to further reduce input and output ripple, a filter capacitor can be connected to the input and output terminals, see Fig.3. Moreover, choosing suitable filter capacitor is very important, start-up problems may be caused by too large capacitance. To ensure the modules running well, the recommended capacitive load values as shown in Table 1.

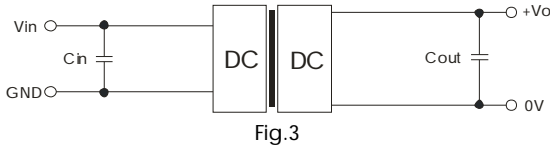


Fig.3

Recommended capacitive load value table (Table 1)

Vin(VDC)	Cin(μF)	Vo (VDC)	Cout(μF)
5	4.7	3.3	10
12	2.2	5	10
15	2.2	9	4.7
24	1	12	2.2
--	--	15	1
--	--	24	0.47

It is not recommended to connect any external capacitor when output power is less than 0.5W.

2. EMC typical recommended circuit (CLASS B)

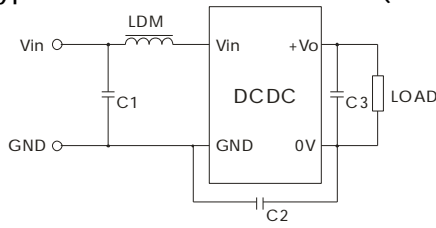


Fig. 4

Input voltage (VDC)	5/12/15/24
C1	4.7μF /50V
C2	--
C3	Refer to the Cout in Fig.3
LDM	6.8μH


Note: 1. F2424XT-2WR2 is subject to C2 (C2 : 470pF/3KV).  
2. It is not needed to add the component in the peripheral circuit when parameter with the symbol of "--".

3. Output load requirements

To ensure the module work efficiently and reliably, during the operation, the min. output load should be no less than 10% of the full load. If the actual output power is low, please connect a resistor to the output terminal in parallel, with a recommended resistance which is 10% of the rated power, and derating is required during operation.

4. For more information please find DC-DC converter application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

Dimensions and Recommended Layout

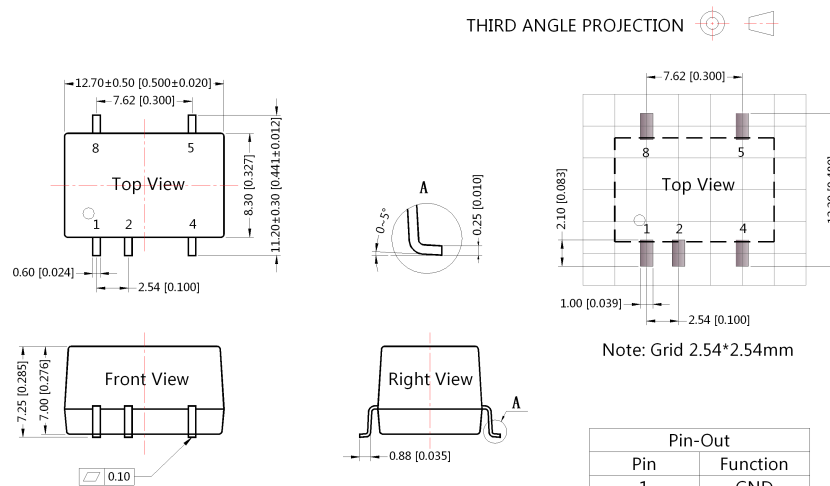

Note:  
Unit: mm[inch]  
Pin section tolerances: ±0.10[±0.004]  
General tolerances: ±0.25[±0.010]

Pin-Out	
Pin	Function
1	GND
2	Vin
4	0V
5	+Vo
8	NC

NC: No Connection

Note:

1. Packing information please refer to "Product Packing Information ".Packing bag number: 58210024;
2. If the product is operated out of the min. load requirement, the product performance may not meet all parameter indexes in this datasheet;
3. The max. capacitive load offered is tested at nominal input voltage and full load;
4. Unless otherwise specified, parameter indexes in this datasheet is measured under the conditions of Ta=25°C, humidity<75% with nominal input voltage and rated output load;
5. All testing methods in this datasheet are based on our Company's corporate standards;
6. The parameter indexes above are for the modules listed in this datasheet, for non-standard module's parameter indexes, please contact our technicians for specific information;
7. We can provide custom design;
8. Specifications are subject to change without prior notice.

## MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China

Tel: 86-20-38601850-8801

Fax: 86-20-38601272

E-mail: [info@mornsun.cn](mailto:info@mornsun.cn)