

Search by Part Number

Search by Specifications

Search in the Lineups

Search by Competitor's Part Number

Home > Products > Capacitors > Ceramic Capacitors > Product details  

Chip Monolithic Ceramic Capacitors for General Purpose

▶ Please be sure to read here, before using a product. ▶ Cautions about imitations

GRM21BR72A223KA01#

"#" indicates a package specification code.

In Production  [Smaller items available](#)










< List of part numbers with package codes >

GRM21BR72A223KA01L、GRM21BR72A223KA01K

Shape



L size	2.0 ±0.1mm
W size	1.25 ±0.1mm
T size	1.25 ±0.1mm
External terminal width e	0.2 to 0.7mm
Distance between external terminals g	0.7mm min.
Size code in inch(mm)	0805 (2012M)

Specifications

Capacitance	22000pF ±10%
Rated voltage	100Vdc
Temperature characteristics (complied standard)	X7R(EIA)
Capacitance change rate	±15.0%
Temperature range of temperature characteristics	-55 to 125°C
Operating temperature range	-55 to 125°C

References

Packaging	Specifications	Minimum quantity
L	φ180mm Embossed taping	3000
K	φ330mm Embossed taping	10000


Mass (typ.)

1 piece	17mg
---------	------

[Stock Check \(Where to buy\)](#) 


[PDF Catalogs](#)

[Download a PDF file of this page](#) 

[How to read part numbers](#) 


[Series Information](#) 


Specifications

[Detailed specifications sheet](#) 

- Rated value
- Specifications and Test methods
- Package
- Caution, Notice (Storage, Soldering and Mounting, ...etc.)

Product data

[SPICE Netlist \(mod type\)](#) 

[S parameter \(S2P type\)](#) 


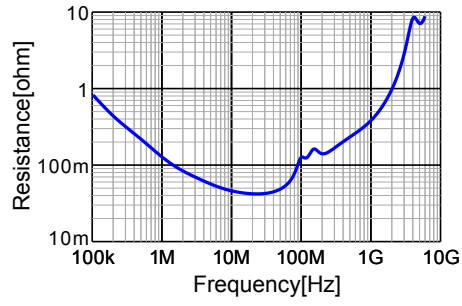
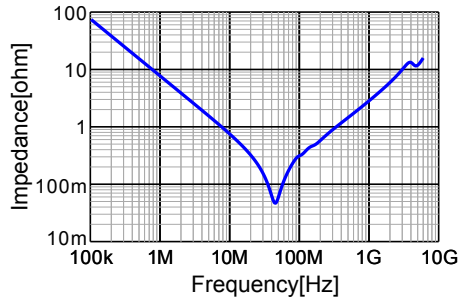
[Reliability test data \(Typical data\)](#) 

Chart of characteristic data



 [Go to the detailed chart](#) 

[Top of page](#)