

Search by Part Number

Search by Specifications

Search in the Lineups

Search by Competitor's Part Number

Home > Products > Capacitors > Ceramic Capacitors > Product details  

## Chip Monolithic Ceramic Capacitors for General Purpose

▶ Please be sure to read here, before using a product. ▶ Cautions about imitations

# GRM31CR72E104KW03#


"#" indicates a package specification code.

Recommended In Production ?

General 125°C Reflow OK Flow OK RoHS REACH ?

< List of part numbers with package codes >  
GRM31CR72E104KW03L、GRM31CR72E104KW03K

## Shape



L size	3.2 ±0.2mm
W size	1.6 ±0.2mm
T size	1.6 ±0.2mm
External terminal width e	0.3mm min.
Distance between external terminals g	1.2mm min.
Size code in inch(mm)	1206 (3216M)

## Specifications

Capacitance	0.10µF ±10%
Rated voltage	250Vdc
Temperature characteristics (complied standard)	X7R(EIA)
Capacitance change rate	±15.0%
Temperature range of temperature characteristics	-55 to 125°C
Operating temperature range	-55 to 125°C

## References

Packaging	Specifications	Minimum quantity
L	φ180mm Embossed taping	2000
K	φ330mm Embossed taping	8000

### Mass (typ.)


1 piece	52mg
---------	------


20pcs free sample request 

Stock Check (Where to buy) 


PDF Catalogs

Download a PDF file of this page 


How to read part numbers 

Series Information 


### Specifications

Detailed specifications sheet   
 -Rated value  
 -Specifications and Test methods  
 -Package  
 -Caution, Notice (Storage, Soldering and Mounting, ...etc.)



### Product data


SPICE Netlist (mod type) 

S parameter (S2P type) 

Reliability test data (Typical data) 

### Chart of characteristic data

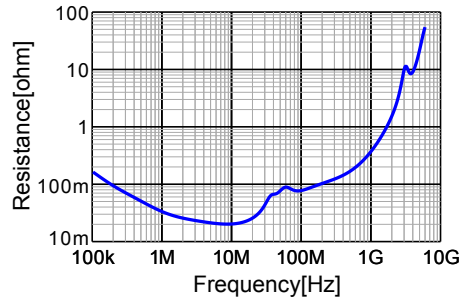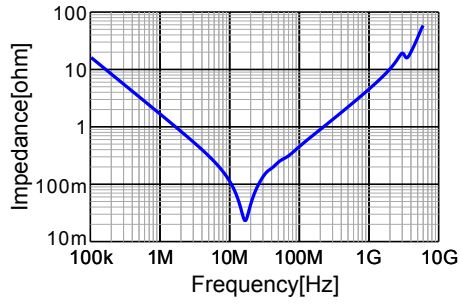

 [Go to the detailed chart](#) 

[Top of page](#)