

Search by Part Number

Search by Specifications

Search in the Lineups

Search by Competitor's Part Number

Home > Products > Capacitors > Ceramic Capacitors > Product details  

### Chip Monolithic Ceramic Capacitors for General Purpose

▶ Please be sure to read here, before using a product. ▶ Cautions about imitations

# GRM188R61A225KE34#

"#" indicates a package specification code.


In Production  [Smaller items available](#)

General
85°C
Reflow OK
Flow OK
RoHS
REACH 

< List of part numbers with package codes >

GRM188R61A225KE34D、GRM188R61A225KE34J

## Shape



L size	1.6 ±0.1mm
W size	0.8 ±0.1mm
T size	0.8 ±0.1mm
External terminal width e	0.2 to 0.5mm
Distance between external terminals g	0.5mm min.
Size code in inch(mm)	0603 (1608M)

## Specifications

Capacitance	2.2µF ±10%
Rated voltage	10Vdc
Temperature characteristics (complied standard)	X5R(EIA)
Capacitance change rate	±15.0%
Temperature range of temperature characteristics	-55 to 85°C
Operating temperature range	-55 to 85°C

## References

Packaging	Specifications	Minimum quantity
D	φ180mm Paper taping	4000
J	φ330mm Paper taping	10000


### Mass (typ.)

1 piece	6.3mg
---------	-------

[Stock Check \(Where to buy\)](#) 


[PDF Catalogs](#)

[Download a PDF file of this page](#) 

[How to read part numbers](#) 


[Series Information](#) 


### Specifications


[Detailed specifications sheet](#) 

- Rated value
- Specifications and Test methods
- Package
- Caution, Notice (Storage, Soldering and Mounting, ...etc.)



### Product data


[SPICE Netlist \(mod type\)](#) 

[S parameter \(S2P type\)](#) 

[Reliability test data \(Typical data\)](#) 

### Chart of characteristic data

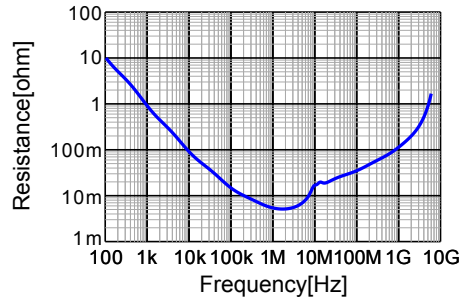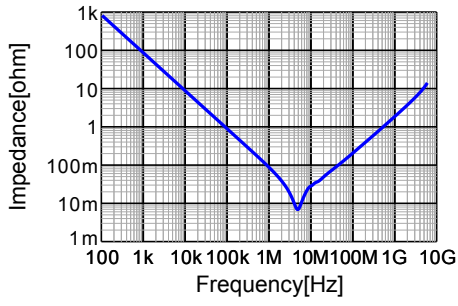

 [Go to the detailed chart](#) 

[Top of page](#)