

Search by Part Number

Search by Specifications

Search in the Lineups

Search by Competitor's Part Number

Home > Products > Capacitors > Ceramic Capacitors > Product details  

Chip Monolithic Ceramic Capacitors for General Purpose

▶ Please be sure to read here, before using a product. ▶ Cautions about imitations

GRM155R60J105KE19#


"#" indicates a package specification code.

In Production  [Smaller items available](#)

General
85°C
Reflow OK
RoHS
REACH 

< List of part numbers with package codes >
 GRM155R60J105KE19D、 GRM155R60J105KE19W、 GRM155R60J105KE19J

Shape



L size	1.0 ±0.05mm
W size	0.5 ±0.05mm
T size	0.5 ±0.05mm
External terminal width e	0.15 to 0.35mm
Distance between external terminals g	0.3mm min.
Size code in inch(mm)	0402 (1005M)

Specifications

Capacitance	1.0μF ±10%
Rated voltage	6.3Vdc
Temperature characteristics (complied standard)	X5R(EIA)
Capacitance change rate	±15.0%
Temperature range of temperature characteristics	-55 to 85°C
Operating temperature range	-55 to 85°C

References

Packaging	Specifications	Minimum quantity
D	φ180mm Paper taping	10000
J	φ330mm Paper taping	50000
W	φ180mm Paper taping (W8P1*) * Width : 8mm, Pocket pitch : 1mm	20000

[Stock Check \(Where to buy\)](#) 

[PDF Catalogs](#)

[Download a PDF file of this page](#) 

[How to read part numbers](#) >

[Series Information](#) >

Specifications

[Detailed specifications sheet](#) >

- Rated value
- Specifications and Test methods
- Package
- Caution, Notice (Storage, Soldering and Mounting, ...etc.)

Product data

[SPICE Netlist \(mod type\)](#) >

[S parameter \(S2P type\)](#) >

[Reliability test data \(Typical data\)](#) >

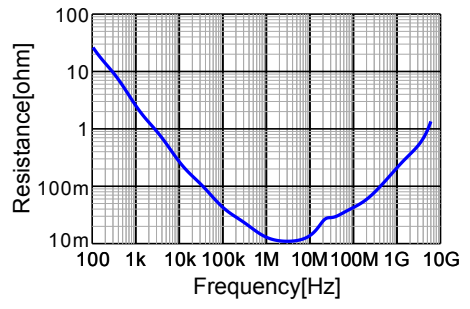
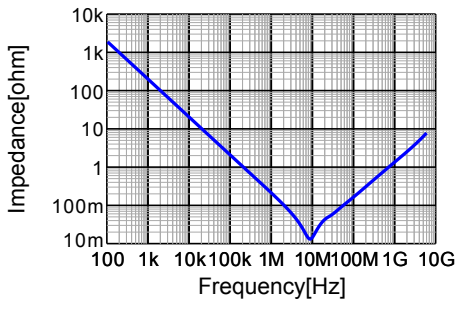
Related information



[Proposal of new tape packaging](#) >

Mass (typ.)

1 piece	1.6mg
φ180mm Reel	118g

Chart of characteristic data



 [Go to the detailed chart](#) 

[Top of page](#)