

## 54AC04 Hex Inverter


### General Description

The AC04 contains six inverters.



### Features

- $I_{CC}$  reduced by 50% on 54AC only
- Outputs source/sink 24 mA
- 'ACT04 has TTL-compatible inputs
- Standard Military Drawing (SMD)
  - 'AC04: 5962-87609
- For Military 54ACT04 device see 54ACTQ04

### Logic Symbol

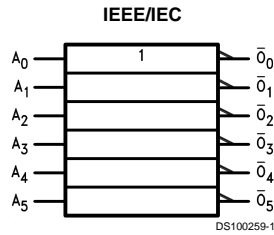

### Connection Diagrams

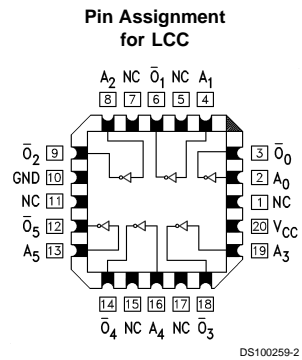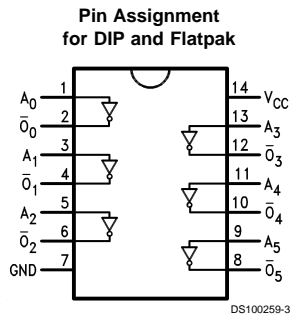

Pin Names	Description
$A_n$	Inputs
$\bar{O}_n$	Outputs

FACT® is a registered trademark of Fairchild Semiconductor Corporation.

### Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage ( $V_{CC}$ )	-0.5V to +7.0V
DC Input Diode Current ( $I_{IK}$ )	
$V_I = -0.5V$	-20 mA
$V_I = V_{CC} + 0.5V$	+20 mA
DC Input Voltage ( $V_I$ )	-0.5V to $V_{CC} + 0.5V$
DC Output Diode Current ( $I_{OK}$ )	
$V_O = -0.5V$	-20 mA
$V_O = V_{CC} + 0.5V$	+20 mA
DC Output Voltage ( $V_O$ )	-0.5V to to $V_{CC} + 0.5V$
DC Output Source	
or Sink Current ( $I_O$ )	±50 mA
DC $V_{CC}$ or Ground Current	
per Output Pin ( $I_{CC}$ or $I_{GND}$ )	±50 mA

Storage Temperature ( $T_{STG}$ )	-65°C to +150°C
Junction Temperature ( $T_J$ )	
CDIP	175°C

### Recommended Operating Conditions

Supply Voltage ( $V_{CC}$ )	'AC	2.0V to 6.0V
Input Voltage ( $V_I$ )		0V to $V_{CC}$
Output Voltage ( $V_O$ )		0V to $V_{CC}$
Operating Temperature ( $T_A$ )	54AC	-55°C to +125°C
Minimum Input Edge Rate ( $\Delta V/\Delta t$ )	'AC Devices	
$V_{IN}$ from 30% to 70% of $V_{CC}$		
$V_{CC}$ @ 3.3V, 4.5V, 5.5V		125 mV/ns

**Note 1:** Absolute maximum ratings are those values beyond which damage to the device may occur. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. National does not recommend operation of FACT® circuits outside databook specifications.

### DC Characteristics for 'AC Family Devices

Symbol	Parameter	$V_{CC}$ (V)	54AC	Units	Conditions	
			$T_A = -55^\circ\text{C to } +125^\circ\text{C}$			
			Guaranteed Limits			
$V_{IH}$	Minimum High Level Input Voltage	3.0	2.1	V	$V_{OUT} = 0.1V$ or $V_{CC} - 0.1V$	
		4.5	3.15			
		5.5	3.85			
$V_{IL}$	Maximum Low Level Input Voltage	3.0	0.9	V	$V_{OUT} = 0.1V$ or $V_{CC} - 0.1V$	
		4.5	1.35			
		5.5	1.65			
$V_{OH}$	Minimum High Level Output Voltage	3.0	2.9	V	$I_{OUT} = -50 \mu A$	
		4.5	4.4			
		5.5	5.4			
			3.0	2.4	V	(Note 2) $V_{IN} = V_{IL}$ or $V_{IH}$ -12 mA $I_{OH} -24$ mA -24 mA
			4.5	3.7		
			5.5	4.7		
$V_{OL}$	Maximum Low Level Output Voltage	3.0	0.1	V	$I_{OUT} = 50 \mu A$	
		4.5	0.1			
		5.5	0.1			
			3.0	0.5	V	(Note 2) $V_{IN} = V_{IL}$ or $V_{IH}$ 12 mA $I_{OL} 24$ mA 24 mA
			4.5	0.5		
			5.5	0.5		
$I_{IN}$	Maximum Input Leakage Current	5.5	±1.0	µA	$V_I = V_{CC}, GND$	
$I_{OLD}$	(Note 3) Minimum Dynamic Output Current	5.5	50	mA	$V_{OLD} = 1.65V$ Max	
$I_{OHD}$		5.5	-50	mA	$V_{OHD} = 3.85V$ Min	
$I_{CC}$	Maximum Quiescent Supply Current	5.5	40.0	µA	$V_{IN} = V_{CC}$ or GND	

**Note 2:** All outputs loaded; thresholds on input associated with output under test.

**Note 3:** Maximum test duration 2.0 ms, one output loaded at a time.

## DC Characteristics for 'AC Family Devices (Continued)

**Note 4:**  $I_{IN}$  and  $I_{CC}$  @ 3.0V are guaranteed to be less than or equal to the respective limit @ 5.5V  $V_{CC}$ .  
 $I_{CC}$  for 54AC @ 25°C is identical to 74AC @ 25°C.

## AC Electrical Characteristics

Symbol	Parameter	$V_{CC}$ (V) (Note 5)	54AC		Units	Fig. No.
			$T_A = -55^\circ\text{C}$ to $+125^\circ\text{C}$ $C_L = 50\text{ pF}$			
			Min	Max		
$t_{PLH}$	Propagation Delay	3.3	1.0	11.0	ns	
		5.0	1.5	8.5		
$t_{PHL}$	Propagation Delay	3.3	1.0	10.0	ns	
		5.0	1.5	7.5		



**Note 5:** Voltage Range 3.3 is 3.3V  $\pm 0.3V$   
Voltage Range 5.0 is 5.0V  $\pm 0.5V$

## Capacitance

Symbol	Parameter	Typ	Units	Conditions
$C_{IN}$	Input Capacitance	4.5	pF	$V_{CC} = \text{Open}$
$C_{PD}$	Power Dissipation Capacitance	30.0	pF	$V_{CC} = 5.0V$





**Physical Dimensions** inches (millimeters) unless otherwise noted

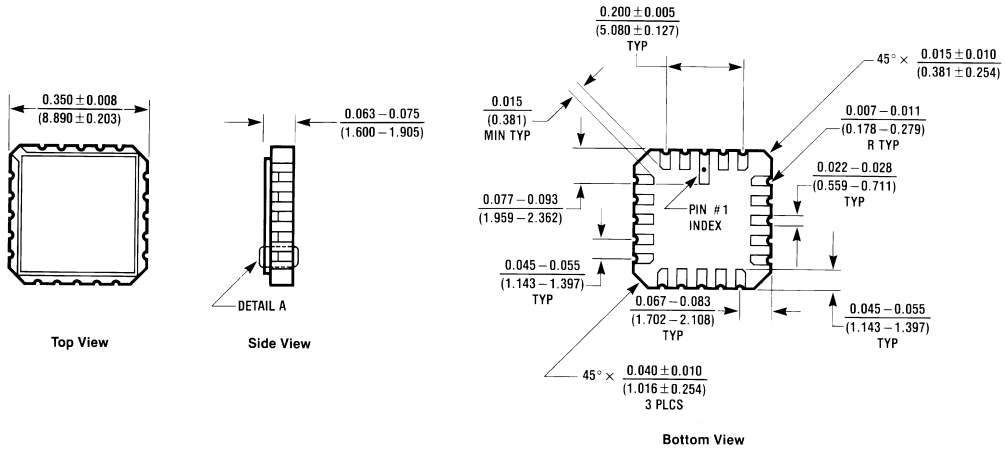

**20 Terminal Ceramic Leadless Chip Carrier (L)**  
NS Package Number E20A


E20A (REV D)

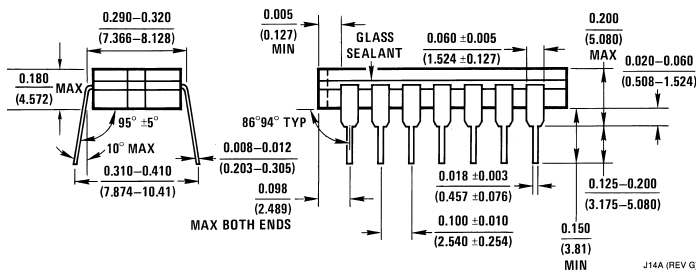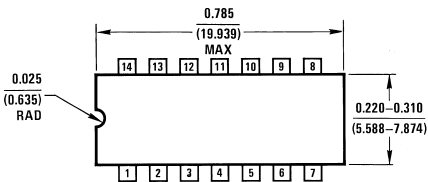

**14 Lead Ceramic Dual-In-Line Package (D)**  
NS Package Number J14A

J14A (REV G)

**Physical Dimensions** inches (millimeters) unless otherwise noted (Continued)

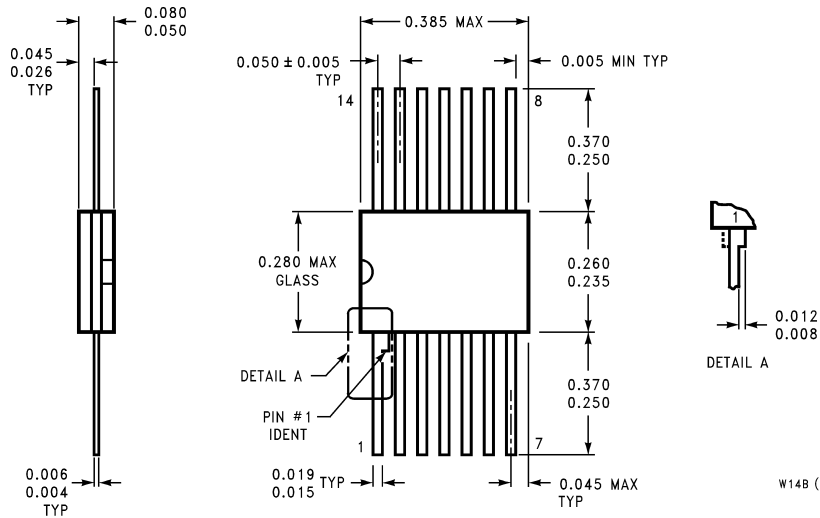

**14 Lead Ceramic Flatpak (F)  
NS Package Number W14B**

W14B (REV J)

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.





**National Semiconductor Corporation**  
Americas  
Tel: 1-800-272-9959  
Fax: 1-800-737-7018  
Email: support@nsc.com

**National Semiconductor Europe**  
Fax: +49 (0) 1 80-530 85 86  
Email: europe.support@nsc.com  
Deutsch Tel: +49 (0) 1 80-530 85 85  
English Tel: +49 (0) 1 80-532 78 32  
Français Tel: +49 (0) 1 80-532 93 58  
Italiano Tel: +49 (0) 1 80-534 16 80

**National Semiconductor Asia Pacific Customer Response Group**  
Tel: 65-2544466  
Fax: 65-2504466  
Email: sea.support@nsc.com

**National Semiconductor Japan Ltd.**  
Tel: 81-3-5620-6175  
Fax: 81-3-5620-6179

www.national.com

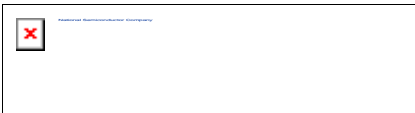

## 54AC04 Hex Inverter

### Contents

- [General Description](#)
- [Features](#)
- [Datasheet](#)
- [Package Availability, Models, Samples & Pricing](#)
- [Application Notes](#)




### General Description

The AC04 contains six inverters.

### Features

- $I_{CC}$  reduced by 50% on 54AC only
- Outputs source/sink 24 mA
- 'ACT04 has TTL-compatible inputs
- Standard Military Drawing (SMD)
  - 'AC04: 5962-87609
- For Military 54ACT04 device see 54ACTQ04




### Datasheet

Title	Size (in Kbytes)	Date	 View Online	 Download	 Receive via Email
54AC04 Hex Inverter	114 Kbytes	29-Sep-98	<a href="#">View Online</a>	<a href="#">Download</a>	<a href="#">Receive via Email</a>

Please use [Adobe Acrobat](#) to view PDF file(s).

If you have trouble printing, see [Printing Problems](#).




## Package Availability, Models, Samples & Pricing

Part Number	Package		Status	Models		Samples & Electronic Orders	Budgetary Pricing	
	Type	# pins		SPICE	IBIS		Quantity	\$US each
5962-87609012A	LCC	20	Full production	N/A	N/A		50+	\$6.5000
5962-8760901CA	Cerdip	14	Full production	N/A	N/A		50+	\$1.8000
5962-8760901DA	Cerpack	14	Full production	N/A	N/A		50+	\$4.5000
JM38510R75701BC	Cerdip	14	Full production	N/A	N/A	.	50+	\$68.0000
JM38510R75701BD	Cerpack	14	Full production	N/A	N/A	.	50+	\$68.0000
JM38510/75701B2	LCC	20	Full production	N/A	N/A	.	50+	\$8.0000
JM38510R75701B2	LCC	20	Full production	N/A	N/A	.	50+	\$70.0000
JM38510/75701BC	Cerdip	14	Full production	N/A	N/A	.	50+	\$7.0000
JM38510/75701BD	Cerpack	14	Full production	N/A	N/A	.	50+	\$8.0000



JM38510/75701S2	LCC	20	Full production	N/A	N/A	.	50+	\$170.000
JM38510R75701S2	LCC	20	Full production	N/A	N/A	.	50+	\$138.000
JM38510R75701SC	Cerdip	14	Full production	N/A	N/A	.	50+	\$138.000
RM54AC04SDA	Cerpack	14	Full production	N/A	N/A	.		
JM38510R75701SD	Cerpack	14	Full production	N/A	N/A	.	50+	\$138.000
54AC04 MDA	die		Full production	N/A	N/A	.	50+	\$1.5000
54AC04 MDS	die		Full production	N/A	N/A	.	50+	\$38.1000
54AC04 MW8	wafer		Full production	N/A	N/A	.		

## Application Notes

Title	Size (in Kbytes)	Date	 View Online	 Download	 Receive via Email
<b>AN-925:</b> Radiation Design Test Data for Advanced CMOS Product	194 Kbytes	5-Aug- 95	<a href="#">View Online</a>	<a href="#">Download</a>	<a href="#">Receive via Email</a>

Please use [Adobe Acrobat](#) to view PDF file(s).  
If you have trouble printing, see [Printing Problems](#).

[Information as of 28-Jul-2000]

Quick Search

[Parametric  
Search](#)

[System  
Diagrams](#)

[Product  
Tree](#)

[Home](#)

[About Languages](#) . [About the Site](#) . [About "Cookies"](#)

National is [QS 9000 Certified](#) . [Privacy/Security](#)

Copyright © National Semiconductor Corporation

 [Preferences](#) . [Feedback](#)