




VZ series Wide Temperature Range

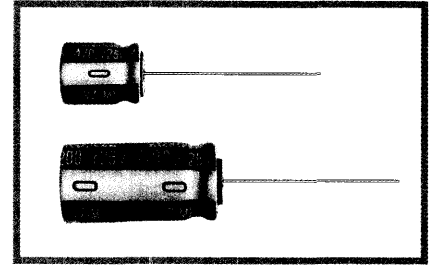


- Small case sizes as same as VR series, but operating over wide temperature range of $-55\sim+105^{\circ}\text{C}$.

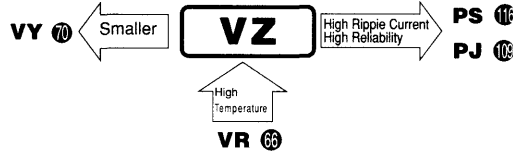

Specifications

Item	Performance Characteristics																																						
Category Temperature Range	$-55\sim+105^{\circ}\text{C}$ (6.3~100V), $-40\sim+105^{\circ}\text{C}$ (160~400V), $-25\sim+105^{\circ}\text{C}$ (450V)																																						
Rated Voltage Range	6.3~450V																																						
Rated Capacitance Range	0.1~33000 μF																																						
Capacitance Tolerance	$\pm 20\%$ at 120Hz, 20°C																																						
Leakage Current	<table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3~100</th> <th>160~450</th> </tr> <tr> <td>After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.</td> <td></td> <td>After 1 minute's application of rated voltage, CV\leq1000: $I=0.1\text{CV}+40$ (μA) or less</td> </tr> <tr> <td>After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.</td> <td></td> <td>After 1 minute's application of rated voltage, CV > 1000: $I=0.04\text{CV}+100$ (μA) or less</td> </tr> </table>	Rated voltage (V)	6.3~100	160~450	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.		After 1 minute's application of rated voltage, CV \leq 1000: $I=0.1\text{CV}+40$ (μA) or less	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.		After 1 minute's application of rated voltage, CV > 1000: $I=0.04\text{CV}+100$ (μA) or less																													
	Rated voltage (V)	6.3~100	160~450																																				
After 1 minute's application of rated voltage, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.		After 1 minute's application of rated voltage, CV \leq 1000: $I=0.1\text{CV}+40$ (μA) or less																																					
After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater.		After 1 minute's application of rated voltage, CV > 1000: $I=0.04\text{CV}+100$ (μA) or less																																					
$\tan \delta$	For capacitance of more than 1000 μF , add 0.02 for every increase of 1000 μF . Measurement frequency: 120Hz, Temperature: 20°C <table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160~315</th> <th>350~450</th> </tr> <tr> <td>$\tan \delta$ (MAX.)</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.20</td> <td>0.25</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160~315	350~450	$\tan \delta$ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.25																
Rated voltage (V)	6.3	10	16	25	35	50	63	100	160~315	350~450																													
$\tan \delta$ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.25																													
Stability at Low Temperature	Measurement frequency: 120Hz																																						
	<table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160~200</th> <th>250~350</th> <th>400</th> <th>450</th> </tr> <tr> <td>Impedance ratio Z-25°C/Z$+20^{\circ}\text{C}$</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>4</td> <td>6</td> <td>15</td> </tr> <tr> <td>ZT/Z20 (MAX.)</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>4</td> <td>8</td> <td>10</td> <td>---</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160~200	250~350	400	450	Impedance ratio Z -25°C /Z $+20^{\circ}\text{C}$	5	4	3	2	2	2	2	2	3	4	6	15	ZT/Z20 (MAX.)	10	8	6	4	3	3	3	3	4	8	10
Rated voltage (V)	6.3	10	16	25	35	50	63	100	160~200	250~350	400	450																											
Impedance ratio Z -25°C /Z $+20^{\circ}\text{C}$	5	4	3	2	2	2	2	2	3	4	6	15																											
ZT/Z20 (MAX.)	10	8	6	4	3	3	3	3	4	8	10	---																											
Endurance	After 1000 hours' application of rated voltage at 105°C, capacitors meet the characteristic requirements listed at right. <table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 20\%$ of initial value</td> </tr> <tr> <td>$\tan \delta$</td> <td>200% or less of initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Initial specified value or less</td> </tr> </table>	Capacitance change	Within $\pm 20\%$ of initial value	$\tan \delta$	200% or less of initial specified value	Leakage current	Initial specified value or less																																
Capacitance change	Within $\pm 20\%$ of initial value																																						
$\tan \delta$	200% or less of initial specified value																																						
Leakage current	Initial specified value or less																																						
Shelf Life	After leaving capacitors under no load at 105°C for 1000 hours, they meet the specified value for endurance characteristics listed above.																																						
Marking	Printed with white color letter on black sleeve.																																						


Radial Lead Type

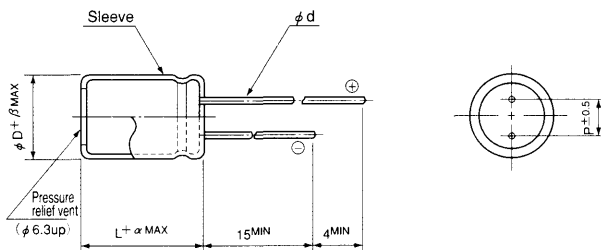

ϕD	5	6.3	8	10	12.5	16	18	20	22	25
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0	12.5
ϕd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0	1.0
β	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0

α	(L < 20) 1.5
	(L \geq 20) 2.0

Type numbering system (Example: 10V 330 μF)

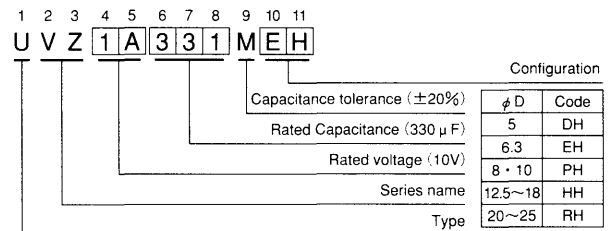

Please refer to page 18, 19, 20 about the formed or taped product spec.
Please refer to page 3 for the minimum order quantity.

• Dimension table in next page.

VZ series

 ALUMINUM ELECTROLYTIC CAPACITORS
MINIATURE

■ Dimensions

		V		6.3		10		16		25		35		50		DXL(mm)
Cap. (μF)	Code	0J		1A		1C		1E		1V		1H				
0.1	0R1														5×11	13
0.22	R22														5×11	29
0.33	R33														5×11	43
0.47	R47														5×11	7
1	010														5×11	13
2.2	2R2														5×11	20
3.3	3R3														5×11	25
4.7	4R7														5×11	30
10	100							5×11	35	5×11	25	5×11	28	5×11	46	46
22	220	5×11	45	5×11	45	5×11	54	5×11	58	5×11	36	5×11	41	5×11	68	68
33	330	5×11	55	5×11	58	5×11	65	5×11	68	5×11	68	5×11	75	5×11	90	90
47	470	5×11	65	5×11	68	5×11	79	5×11	83	5×11	83	5×11	93	6.3×11	115	115
100	101	5×11	95	5×11	105	5×11	115	6.3×11	140	6.3×11	140	6.3×11	150	8×11.5	190	190
220	221	5×11	145	6.3×11	175	6.3×11	190	8×11.5	240	8×11.5	240	10×12.5	275	10×12.5	300	300
330	331	6.3×11	195	6.3×11	210	8×11.5	265	10×12.5	315	10×12.5	315	10×12.5	350	10×16	410	410
470	471	6.3×11	230	6.3×11	250	8×11.5	315	10×12.5	380	10×12.5	380	10×16	460	12.5×20	530	530
1000	102	8×11.5	390	10×12.5	460	10×16	560	10×20	680	12.5×20	680	12.5×20	810	12.5×25	950	950
2200	222	10×20	710	10×20	760	12.5×20	920	12.5×25	1090	16×25	1090	16×25	1260	16×35.5	1470	1470
3300	332	10×20	840	12.5×20	1000	12.5×25	1170	16×25	1400	16×35.5	1400	16×35.5	1610	18×35.5	1770	1770
4700	472	12.5×20	1090	12.5×25	1260	16×25	1480	16×31.5	1710	18×35.5	1710	18×35.5	1910	20×40	2100	2100
6800	682	12.5×25	1350	16×25	1570	16×35.5	1780	18×35.5	2040	20×40	2040	20×40	2150	22×50	2500	2500
10000	103	16×25	1650	16×35.5	1890	18×35.5	2060	20×40	2150	22×50	2150	22×50	2650	25×50	2850	2850
15000	153	16×35.5	2010	18×35.5	2180	20×40	2430	22×50	2750	25×50	2750	25×50	3100			
22000	223	18×40	2350	20×40	2650	22×50	3000	25×50	3250							
33000	333	22×50	2800	22×50	3250	25×50	3450							Case size		Rated ripple

		V		63		100		160		200		250		315		350		400		450		
Cap. (μF)	Code	1J		2A		2C		2D		2E		2F		2V		2G		2W				
0.1	0R1			5×11	1.5																	
0.22	R22			5×11	3.4																	
0.33	R33			5×11	5.0																	
0.47	R47			5×11	7.1	6.3×11	11	6.3×11	11	6.3×11	10											
1	010			5×11	15	6.3×11	16	6.3×11	16	6.3×11	15	6.3×11	15	6.3×11	15	8×11.5	17	8×11.5	13			
2.2	2R2			5×11	21	6.3×11	25	6.3×11	25	6.3×11	23	8×11.5	26	8×11.5	26	10×12.5	30	10×12.5	23			
3.3	3R3			5×11	29	6.3×11	30	6.3×11	30	8×11.5	32	10×12.5	38	10×12.5	38	10×12.5	38	10×16	31			
4.7	4R7			5×11	32	6.3×11	34	8×11.5	39	8×11.5	39	10×12.5	45	10×12.5	45	10×16	50	10×20	40			
10	100	5×11	46	6.3×11	54	8×11.5	41	10×12.5	65	10×16	74	10×20	80	10×20	80	12.5×20	90	12.5×20	65			
22	220	5×11	71	6.3×11	93	10×16	100	10×20	120	12.5×20	130	12.5×20	115	12.5×25	115	16×25	165	16×25	115			
33	330	6.3×11	100	8×11.5	130	10×20	145	12.5×20	160	12.5×20	160	16×25	195	16×25	195	16×31.5	215	16×35.5	165			
47	470	6.3×11	120	10×12.5	165	12.5×20	195	12.5×20	195	12.5×25	210	16×25	230	16×35.5	270	16×35.5	270	18×40	185			
100	101	10×12.5	215	10×20	265	12.5×25	215	16×31.5	375	16×31.5	365	18×35.5	395	18×40	420	20×40	450	22×40	270			
220	221	10×16	335	12.5×25	440	16×35.5	570	18×35.5	575	20×40	600	22×50	620	22×50	620	25×50	660					
330	331	10×20	510	12.5×25	540	18×40	750	20×40	705	22×50	730	25×50	760									
470	471	12.5×20	640	16×25	715	22×40	900	22×50	840	25×50	870											
1000	102	16×25	930	18×40	985	25×50	1310															
2200	222	18×35.5	1650	22×50	1750																	
3300	332	20×40	1950	25×50	2070																	
4700	472	22×50	2450																			
6800	682	25×50	2800																			Case size

Rated Ripple (mA rms) at 105°C 120Hz

● Frequency coefficient of rated ripple current

V	Cap. (μF)	Frequency				
		50Hz	120Hz	300Hz	1 kHz	10 kHz~
6.3~100	~47	0.75	1.00	1.35	1.57	2.00
	100~470	0.80	1.00	1.23	1.34	1.50
	1000~33000	0.85	1.00	1.10	1.13	1.15
160~450	0.47~220	0.80	1.00	1.25	1.40	1.60
	330~1000	0.90	1.00	1.10	1.13	1.15