


- Features:
- TR20/30/35/50/50H comes in TO-220 style power package
  - TR100 available in TO-247 style power package
  - TR30/35/50H/100 has single screw mounting to heat sink
  - Molded case for environmental protection
  - Electrically isolated case
  - Non-inductive package

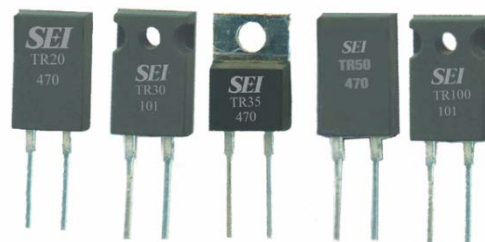




| Electrical Specifications |               |                                               |                             |                             |                                                                |                                            |                                                             |                                                              |                                                              |
|---------------------------|---------------|-----------------------------------------------|-----------------------------|-----------------------------|----------------------------------------------------------------|--------------------------------------------|-------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------|
| Type / Code               | Package Style | Power Rating (Watts)@ 25°C with Heat Sink (3) | Power Rating (Watts) @ 25°C | Maximum Working Voltage (1) | Resistance Temperature Coefficient                             | Ohmic Range (Ω) and Tolerance              |                                                             |                                                              |                                                              |
|                           |               |                                               |                             |                             |                                                                | 0.5%                                       | 1%                                                          | 5%                                                           | 10%                                                          |
| TR20                      | TO-220        | 20W                                           | 3W                          | 350V                        | ±50 ppm/°C<br>±100 ppm/°C<br>±200 ppm/°C<br>±300 ppm/°C<br>(2) | 10 - 1M<br>5.05 - 1M<br>10 - 1M<br>-       | 10 - 1M<br>3.01 - 1M<br>3.01 - 1M<br>1.02 - 3.01<br>-       | 10 - 1M<br>3.3 - 1M<br>3.3 - 1M<br>1.1 - 3<br>0.05 - 1       | 10 - 1M<br>3.3 - 1M<br>3.3 - 1M<br>1.1 - 3<br>0.05 - 1       |
| TR30                      | TO-220        | 30W                                           | 2.25W                       | 350V                        | ±50 ppm/°C<br>±100 ppm/°C<br>±200 ppm/°C<br>±300 ppm/°C<br>(2) | 10 - 100K<br>5.05 - 100K<br>10 - 100K<br>- | 10 - 100K<br>3.01 - 100K<br>3.01 - 100K<br>1.02 - 3.01<br>- | 10 - 100K<br>3.3 - 100K<br>3.3 - 100K<br>1.1 - 3<br>0.05 - 1 | 10 - 100K<br>3.3 - 100K<br>3.3 - 100K<br>1.1 - 3<br>0.05 - 1 |
| TR35                      | TO-220        | 35W                                           | 2.5W                        | 350V                        | ±50 ppm/°C<br>±100 ppm/°C<br>±200 ppm/°C<br>±300 ppm/°C<br>(2) | 10 - 10K<br>5.05 - 10K<br>10 - 10K<br>-    | 10 - 10K<br>3.01 - 10K<br>3.01 - 10K<br>1.02 - 3.01<br>-    | 10 - 10K<br>3.3 - 10K<br>3.3 - 10K<br>1.1 - 3<br>0.05 - 1    | 10 - 10K<br>3.3 - 10K<br>3.3 - 10K<br>1.1 - 3<br>0.05 - 1    |
| TR50                      | TO-220        | 50W                                           | 3W                          | 350V                        | ±50 ppm/°C<br>±100 ppm/°C<br>±200 ppm/°C<br>±300 ppm/°C<br>(2) | 10 - 10K<br>5.05 - 10K<br>10 - 10K<br>-    | 10 - 10K<br>3.01 - 10K<br>3.01 - 10K<br>1.02 - 3.01<br>-    | 10 - 10K<br>3.3 - 10K<br>3.3 - 10K<br>1.1 - 3<br>0.1 - 1     | 10 - 10K<br>3.3 - 10K<br>3.3 - 10K<br>1.1 - 3<br>0.1 - 1     |
| TR50H                     | TO-220        | 50W                                           | 2.25W                       | 420V                        | ±50 ppm/°C<br>±100 ppm/°C<br>±200 ppm/°C<br>±300 ppm/°C<br>(2) | 10 - 10K<br>5.05 - 10K<br>10 - 10K<br>-    | 10 - 10K<br>3.01 - 10K<br>3.01 - 10K<br>1.02 - 3.01<br>-    | 10 - 10K<br>3.3 - 10K<br>3.3 - 10K<br>1.1 - 3<br>0.1 - 1     | 10 - 10K<br>3.3 - 10K<br>3.3 - 10K<br>1.1 - 3<br>0.1 - 1     |
| TR100                     | TO-247        | 100W                                          | 3.5W                        | 700V                        | ±50 ppm/°C<br>±100 ppm/°C<br>±200 ppm/°C<br>±300 ppm/°C<br>(2) | 10 - 100K<br>5.05 - 100K<br>10 - 100K<br>- | 10 - 100K<br>3.01 - 100K<br>3.01 - 100K<br>1.02 - 3.01<br>- | 10 - 100K<br>3.3 - 100K<br>3.3 - 100K<br>1.1 - 3<br>0.05 - 1 | 10 - 100K<br>3.3 - 100K<br>3.3 - 100K<br>1.1 - 3<br>0.05 - 1 |

(1) Lesser of  $\sqrt{PR}$  or maximum working voltage

(2) Unspecified TCR. Contact Factory.

(3) The case temperature is to be used for the definition of the applied power limit. Refer to Power Derating Curve.

Thermal resistance:  $((T_{@P0\%}) - (T_{max@P100\%})) / P_{@25^\circ C}$




| Mechanical Specifications |                               |                               |                               |                               |                               |                               |              |
|---------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|--------------|
| Type Code                 | TR20                          | TR30                          | TR35                          | TR50                          | TR50H                         | TR100                         | Unit         |
| A                         | 0.410 ± 0.010<br>10.41 ± 0.26 | 0.410 ± 0.010<br>10.41 ± 0.26 | 0.400 ± 0.010<br>10.16 ± 0.25 | 0.410 ± 0.010<br>10.41 ± 0.26 | 0.410 ± 0.010<br>10.41 ± 0.26 | 0.620 ± 0.010<br>15.75 ± 0.26 | inches<br>mm |
| B                         | 0.640 ± 0.010<br>16.26 ± 0.26 | 0.640 ± 0.010<br>16.26 ± 0.26 | 0.581 ± 0.010<br>14.75 ± 0.25 | 0.640 ± 0.010<br>16.26 ± 0.26 | 0.640 ± 0.010<br>16.26 ± 0.26 | 0.815 ± 0.010<br>20.70 ± 0.26 | inches<br>mm |
| C                         | 0.125 ± 0.010<br>3.18 ± 0.26  | 0.125 ± 0.010<br>3.18 ± 0.26  | 0.175 ± 0.015<br>4.44 ± 0.38  | 0.125 ± 0.010<br>3.18 ± 0.26  | 0.125 ± 0.010<br>3.18 ± 0.26  | 0.195 ± 0.010<br>4.95 ± 0.26  | inches<br>mm |
| D                         | 0.050 ± 0.005<br>1.27 ± 0.13  | 0.050 ± 0.005<br>1.27 ± 0.13  | 0.050 ± 0.005<br>1.27 ± 0.13  | 0.050 ± 0.005<br>1.27 ± 0.13  | 0.050 ± 0.005<br>1.27 ± 0.13  | 0.143 ± 0.007<br>3.63 ± 0.18  | inches<br>mm |
| E                         | 0.030 ± 0.004<br>0.76 ± 0.10  | 0.030 ± 0.004<br>0.76 ± 0.10  | 0.031 ± 0.003<br>0.78 ± 0.08  | 0.030 ± 0.004<br>0.76 ± 0.10  | 0.030 ± 0.004<br>0.76 ± 0.10  | 0.060 ± 0.004<br>1.52 ± 0.10  | inches<br>mm |
| F                         | 0.200 ± 0.010<br>5.08 ± 0.26  | 0.200 ± 0.010<br>5.08 ± 0.26  | 0.200 ± 0.010<br>5.08 ± 0.26  | 0.200 ± 0.010<br>5.08 ± 0.26  | 0.200 ± 0.010<br>5.08 ± 0.26  | 0.400 ± 0.010<br>10.16 ± 0.26 | inches<br>mm |
| G                         | 0.130 ± 0.030<br>3.30 ± 0.76  | 0.130 ± 0.030<br>3.30 ± 0.76  | 0.130 ± 0.030<br>3.30 ± 0.76  | 0.130 ± 0.030<br>3.30 ± 0.76  | 0.130 ± 0.030<br>3.30 ± 0.76  | 0.110 ± 0.030<br>2.79 ± 0.76  | inches<br>mm |
| H                         | 0.500 ± 0.050<br>12.70 ± 1.27 | 0.500 ± 0.050<br>12.70 ± 1.27 | 0.539 ± 0.039<br>13.70 ± 1.00 | 0.500 ± 0.050<br>12.70 ± 1.27 | 0.500 ± 0.050<br>12.70 ± 1.27 | 0.570 ± 0.050<br>14.48 ± 1.27 | inches<br>mm |
| J                         | 0.020 ± 0.004<br>0.50 ± 0.10  | 0.020 ± 0.004<br>0.50 ± 0.10  | 0.024 ± 0.003<br>0.62 ± 0.08  | 0.020 ± 0.004<br>0.50 ± 0.10  | 0.020 ± 0.004<br>0.50 ± 0.10  | 0.032 ± 0.010<br>0.81 ± 0.26  | inches<br>mm |
| K                         | 0.070 ± 0.010<br>1.78 ± 0.26  | 0.070 ± 0.010<br>1.78 ± 0.26  | 0.090 ± 0.010<br>2.28 ± 0.25  | 0.070 ± 0.010<br>1.78 ± 0.26  | 0.070 ± 0.010<br>1.78 ± 0.26  | 0.095 ± 0.010<br>2.41 ± 0.26  | inches<br>mm |
| M                         | -                             | 0.125 ± 0.004<br>3.18 ± 0.10  | 0.144 ± 0.004<br>3.65 ± 0.10  | -                             | 0.125 ± 0.004<br>3.18 ± 0.10  | 0.143 ± 0.007<br>3.63 ± 0.18  | inches<br>mm |
| N                         | -                             | 0.125 ± 0.010<br>3.18 ± 0.26  | 0.116 ± 0.004<br>2.95 ± 0.10  | -                             | 0.125 ± 0.010<br>3.18 ± 0.26  | 0.210 ± 0.010<br>5.33 ± 0.26  | inches<br>mm |
| O                         | -                             | -                             | 0.051 ± 0.004<br>1.30 ± 0.10  | -                             | -                             | -                             | inches<br>mm |
| P                         | -                             | -                             | 0.240 ± 0.004<br>6.10 ± 0.10  | -                             | -                             | -                             | inches<br>mm |

### Mounting Note:

- (1) When mounting ensure entire ceramic portion of case is mounted on a clean, flat heat sink with an appropriate thermal interface, such as thermal grease. For screw mounting use of a compression washer at a force of 150 to 300lbs (665 to 1330N) is recommended without exceeding mounting torque of 8 in-lbs (0.9 N-m) to avoid package damage. For clip mounting use of a round or smooth clip in contact area is recommended to avoid a concentrated hot spot on package.
- (2) TR50/100 must be mounted to heat sink using proper mounting clip for efficient heat dissipation.

Power Derating Curve:

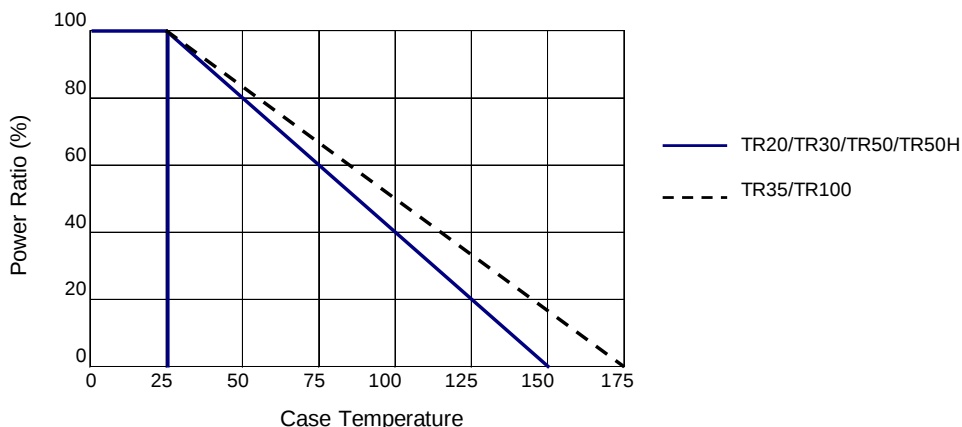

| Environmental Characteristics |                                      |                                      |                                                                                                                     |
|-------------------------------|--------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Test Item                     | Specification                        |                                      | Test Method                                                                                                         |
|                               | TR20/30/35/50/50H                    | TR100                                |                                                                                                                     |
| Short Time Overload           | $\Delta R \pm (0.3\% + 0.001\Omega)$ | $\Delta R \pm (0.5\% + 0.001\Omega)$ | 2 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds |
| Load Life                     | $\Delta R \pm (1\% + 0.001\Omega)$   | $\Delta R \pm (1\% + 0.001\Omega)$   | MIL-R-39009, 2000 hours at rated power                                                                              |
| Moisture Resistance           | $\Delta R \pm (0.5\% + 0.001\Omega)$ | $\Delta R \pm (0.5\% + 0.001\Omega)$ | MIL-STD-202, Method 103B                                                                                            |
| Thermal Shock                 | $\Delta R \pm (0.3\% + 0.001\Omega)$ | $\Delta R \pm (0.5\% + 0.001\Omega)$ | MIL-STD-202, Method 107G                                                                                            |
| Terminal Strength             | $\Delta R \pm (0.2\% + 0.001\Omega)$ | $\Delta R \pm (0.2\% + 0.001\Omega)$ | MIL-STD-202, Method 211, Condition A (Pull Test) 2.4N                                                               |
| Vibration, High Frequency     | $\Delta R \pm (0.2\% + 0.001\Omega)$ | $\Delta R \pm (0.4\% + 0.001\Omega)$ | MIL-STD-202, Method 204, Condition D                                                                                |
| Dielectric Strength           | 1800VAC                              |                                      |                                                                                                                     |
| Insulation Resistance         | 10GΩ min.                            |                                      |                                                                                                                     |

Operating Temperature Range: -65°C to + 150°C (TR20/TR30/TR50/TR50H)  
-65°C to + 175°C (TR35/TR100)

| How to Order   |          |      |       |           |      |           |             |      |             |                                                                                                                                                                                               |
|----------------|----------|------|-------|-----------|------|-----------|-------------|------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1              | 2        | 3    | 4     | 5         | 6    | 7         | 8           | 9    | 10          | 11                                                                                                                                                                                            |
| T              | R        | 2    | 0     | F         | B    | D         | 1           | K    | 0           | 0                                                                                                                                                                                             |
| Product Series |          | Size | Power | Tolerance |      | Packaging |             | TCR  |             | Resistance Value                                                                                                                                                                              |
| TR             | Standard | 20   | 20W   | Code      | Tol  | Code      | Description | Code | ppm         | Four characters with the multiplier used as the decimal holder. "L" used as multiplier of $10^{-3}$ for any value under 0.1 ohm.<br><br>0.05 ohm = 50L0<br>1.02 ohm = 1R02<br>100 Kohm = 100K |
|                |          | 30   | 30W   | D         | 0.5% | B         | Bulk        | X    | unspecified |                                                                                                                                                                                               |
|                |          | 35   | 35W   | F         | 1%   |           |             | C    | 50          |                                                                                                                                                                                               |
|                |          | 50   | 50W   | J         | 5%   |           |             | D    | 100         |                                                                                                                                                                                               |
|                |          | 50H  | 50W   | K         | 10%  |           |             | L    | 200         |                                                                                                                                                                                               |
|                |          | 100  | 100W  |           |      |           |             | M    | 300         |                                                                                                                                                                                               |
|                |          |      |       |           |      |           |             |      |             |                                                                                                                                                                                               |