

- Features:
- Lower-cost alternative to carbon comps and wirewounds
 - Coating meets UL 94V-0
 - Meets solvent test of Mil Standard 202, Method 215
 - Cut and formed product is available on select sizes; contact factory for details
 - Higher or lower resistance values may be possible; contact factory
 - RoHS compliant / lead-free available (RSF, RSMF)





Electrical Specifications							
Type / Code	Power Rating (Watts) @ 70°C	Maximum Working Voltage (1)	Maximum Overload Voltage	Dielectric Withstanding Voltage	Resistance Temperature Coefficient	Ohmic Range (Ω) and Tolerance	
						1%	2%, 5%
RS 1/2	0.5W	250V	400V	600V	±200 ppm/°C	0.1 - 75K	0.1 - 1M
RS 1	1W	350V	600V	600V	±200 ppm/°C	0.1 - 100K	0.1 - 1M
RS 2	2W	350V	600V	600V	±200 ppm/°C	0.1 - 120K	0.1 - 1M
RS 3	3W	400V	700V	600V	±200 ppm/°C	10 - 510K	10 - 510K
RS 5	5W	750V	1,000V	1,000V	±200 ppm/°C	10 - 510K	10 - 510K
RSM 1/2	0.5W	250V	400V	350V	±200 ppm/°C	0.1 - 47K	0.1 - 1M
RSM 1	1W	350V	600V	500V	±200 ppm/°C	0.1 - 75K	0.1 - 1M
RSM 2	2W	350V	600V	500V	±200 ppm/°C	0.1 - 100K	0.1 - 1M
RSM 3	3W	500V	800V	500V	±200 ppm/°C	0.1 - 118K	0.1 - 1M
RSM 5	5W	750V	1,000V	750V	±200 ppm/°C	1 - 510K	1 - 510K

(1) Lesser of \sqrt{PR} or maximum working voltage

How to Order

SEI Type		Code		Nominal Resistance	Tolerance	Packaging			
RS		1/2		0.47	5%	R			
Type	Description	Code	Wattage	Tolerance		Types	Qty	Description	Code
RS	EIA Standard	1/2	0.5W	1%		RSM 1/2	5,000	Tape	R
RSM	Mini	1	1W	2%		RS 1/2, RSM 1, RS 1, RSM 2	2,500		
RSF	Standard RoHS	2	2W	5%		RS 2, RSM 3	1,000		
RSMF	Mini RoHS	3	3W			RS 3, RSM 5	500		
PRS (1)	Panasert	5	5W			RSM 1/2	5,000		
PRSF (1)	Panasert RoHS					RS 1/2, RSM 1	2,000	Ammo	T
						RS 1, RS 2, RSM 2, RSM 3	1,000		
						RS 3, RSM 5	500		
						All	1,000	Bulk	A

(1) For packaging information see Radial Leaded Packaging Spec page

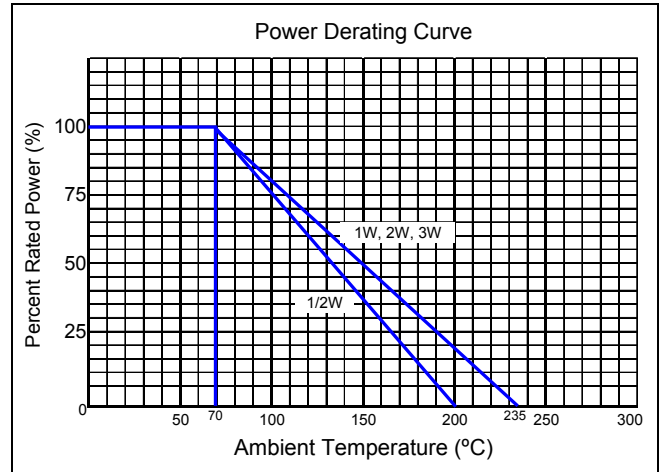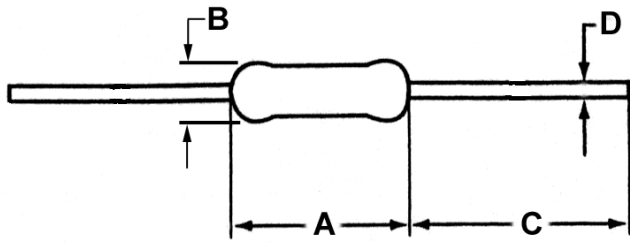

Mechanical Specifications

Type / Code	A Body Length	B Body Diameter	C Lead Length (Bulk)	D Lead Diameter	Units
RS 1/2	0.35 ± 0.04	0.14 ± 0.02	1.1 ± 0.12	0.024 ± 0.003	inches
	9.0 ± 1.0	3.5 ± 0.5	28.0 ± 3.0	0.6 ± 0.01	mm
RS 1	0.43 ± 0.04	0.18 ± 0.02	1.1 ± 0.20	0.028 ± 0.004	inches
	11.0 ± 1.0	4.5 ± 0.5	28.0 ± 5.0	0.7 ± 0.1	mm
RS 2	0.59 ± 0.04	0.2 ± 0.04	1.26 ± 0.24	0.029 ± 0.004	inches
	15.0 ± 1.0	5.0 ± 1.0	32.0 ± 6.0	0.75 ± 0.1	mm
RS 3	0.71 ± 0.08	0.26 ± 0.02	1.38 ± 0.12	0.031 ± 0.002	inches
	17.5 ± 2.0	6.5 ± 0.5	35.0 ± 3.0	0.8 ± 0.05	mm
RS 5	0.96 ± 0.08	0.34 ± 0.02	1.38 ± 0.12	0.031 ± 0.002	inches
	24.5 ± 2.0	8.5 ± 0.5	35.0 ± 3.0	0.8 ± 0.05	mm
RSM 1/2	0.26 ± 0.02	0.09 ± 0.01	1.1 ± 0.12	0.02 ± 0.003	inches
	6.5 ± 0.5	2.3 ± 0.2	28.0 ± 3.0	0.55 ± 0.07	mm
RSM 1	0.35 ± 0.04	0.13 ± 0.02	1.1 ± 0.12	0.026 ± 0.003	inches
	9.0 ± 1.0	3.2 ± 0.6	28.0 ± 3.0	0.65 ± 0.01	mm
RSM 2	0.43 ± 0.04	0.17 ± 0.03	1.18 ± 0.20	0.029 ± 0.004	inches
	11.0 ± 1.0	4.2 ± 0.8	30.0 ± 5.0	0.75 ± 0.1	mm
RSM 3	0.59 ± 0.04	0.2 ± 0.04	1.26 ± 0.24	0.029 ± 0.004	inches
	15.0 ± 1.0	5.0 ± 1.0	32.0 ± 6.0	0.75 ± 0.1	mm
RSM 5	0.71 ± 0.08	0.26 ± 0.02	1.38 ± 0.08	0.031 ± 0.002	inches
	17.5 ± 2.0	6.5 ± 0.5	35.0 ± 2.0	0.8 ± 0.05	mm

Performance Characteristics

Test	Standard / Method	Requirement	
		RSM Series	RS Series
Short Time Over Load	JISC 5202 5.5	± 2%	± 1%
Biased Humidity	MIL-STD 202, Method 103	± 1.5%	
Dielectric Withstanding Voltage	MIL-STD 202, Method 103	± 0.5%	
Load Life	MIL-STD 202, Method 103	± 2%	
Load Life in Humidity	JISC 5202 7.9	± 2%	
Temperature Cycling	JESD22 Method JA-104	± 1%	
Low Temperature Operation	MIL-STD 202, Method 103	± 0.5%	
Moisture Resistance	MIL-STD 202, Method 103	± 0.5%	
Resistance to Solder Heat	MIL-STD 202, Method 210F	± 1%	
Terminal Strength	MIL-STD 202, Method 103	± 0.2%	
Vibration	MIL-STD 202, Method 103	± 0.5%	

Operating Temperature Range: -55°C to +200°C (RS 1/2, RSM 1)
-55°C to +235°C (All others)