


## Jumper, Wire Bridges

### FEATURES


- Suitable for automatic insertion
- Excellent soldering performance
- Lead (Pb)-free solder contacts
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compatible with "Restriction of the use of Hazardous Substances" (RoHS) directive 2002/95/EC (issue 2004)

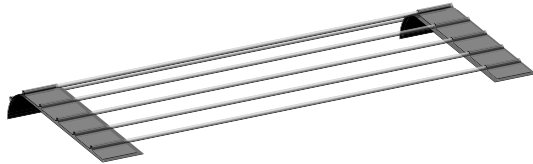

STANDARD ELECTRICAL SPECIFICATIONS		
MODEL	I max A	R max mΩ
DB1U	5	6.0
DB2U	8	4.5
DB4U	12	2.5

• Material: copper leads (E-Cu 58), tin solder finish

### DIMENSIONS [in millimeters]

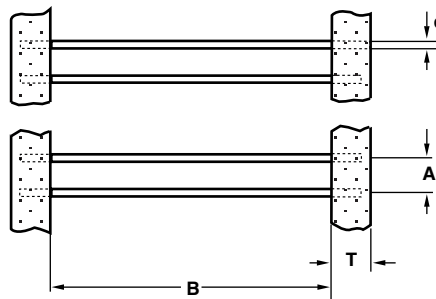

MODEL	B	T	d	A
DB1U	53 ± 1.5	6.0 ± 0.5	0.5	5.0 ± 0.5
DB2U	53 ± 1.5	6.0 ± 0.5	0.6	5.0 ± 0.5
DB4U	53 ± 1.5	6.0 ± 0.5	0.8	5.0 ± 0.5



**PART NUMBER AND PRODUCT DESCRIPTION**

**PART NUMBER:** DB1U000000000D000

D	B	1	U	0	0	0	0	0	0	0	0	0	0	D	0	0	0
<b>MODEL/SIZE</b>	<b>SPECIAL CHARACTER</b>	<b>TC/MATERIAL</b>		<b>VALUE</b>				<b>TOLERANCE</b>		<b>PACKAGING</b>		<b>SPECIAL</b>					
DB1U000 DB2U000 DB4U000	0 = neutral	0 = neutral		4 digit value 0000				1 digit 0 = neutral		D0 = R0 = 10 000 pcs on reel D5 = R5 = 5000 pcs on reel		00 = Standard					

**PRODUCT DESCRIPTION:** DB1 U 0R0 R0

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">DB1U</td></tr> <tr><td style="text-align: center;">MODEL/SIZE</td></tr> <tr><td style="text-align: center;">DB1U DB2U DB4U</td></tr> </table>	DB1U	MODEL/SIZE	DB1U DB2U DB4U	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">0R0</td></tr> <tr><td style="text-align: center;">RESISTANCE VALUE</td></tr> <tr><td style="text-align: center;">0R0 = 0Ω</td></tr> </table>	0R0	RESISTANCE VALUE	0R0 = 0Ω	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="text-align: center;">R0</td></tr> <tr><td style="text-align: center;">PACKAGING</td></tr> <tr><td style="text-align: center;">R0 R5</td></tr> </table>	R0	PACKAGING	R0 R5
DB1U											
MODEL/SIZE											
DB1U DB2U DB4U											
0R0											
RESISTANCE VALUE											
0R0 = 0Ω											
R0											
PACKAGING											
R0 R5											

<b>PACKAGING</b>	
TYPE	QUANTITY PER REEL
DB1U	10 000
DB2U	10 000
DB4U	5000



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.