

Features


1. High sensitivity.
2. TTL and LS-TTL compatible output.
3. Operating supply voltage range.
(Vcc 4.5V to 17V)
4. Output form pull-up resistor built-in type.
5. Low output current dissipation.
(I_{CCCL}: MAX. 3.8mA)
6. High isolation voltage between input and output.
(Viso: 5000VRMS)
7. Available package types: DIP(shown)/ SMD/ H (Page: 137).

Part Numbering System: Page 3. **Part Marking System:** Page 4.


Applications

1. Computer terminals.
2. High speed line receivers.
3. Interfaces with various data transmission equipment.
4. Switching regulators.

Outside Dimension: Unit (mm)

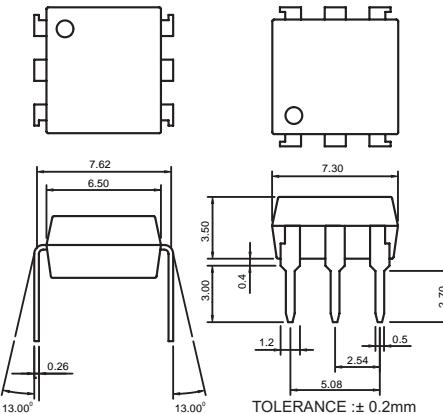

Schematic: Top View

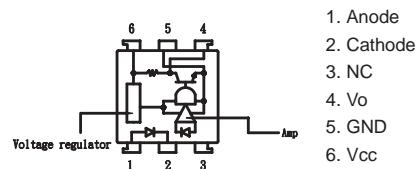

Absolute Maximum Ratings

(Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	10	mA
	Peak forward current	I _{FM}	1	A
	Reverse voltage	V _R	6	V
	Power dissipation	P _D	70	mW
Output	Supply voltage	V _{CC}	-0.5 to 17	V
	Output current	I _O	50	mA
	Power dissipation	P _D	150	mW
	Total power dissipation	P _{TOT}	170	mW
Isolation voltage 1 minute		V _{ISO}	5000	Vrms
Operating temperature		T _{OPR}	-25 to +85	°C
Storage temperature		T _{STG}	-40 to +125	°C
Soldering temperature		T _{SOL}	260	°C

Electro-optical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F =10mA	—	1.2	1.4	V
	Peak forward voltage	V _{FM}	I _{FM} =0.5A	—	—	3.5	V
	Reverse current	I _R	V _R =4V	—	—	10	uA
	Terminal capacitance	C _T	V=0, f=1kHz	—	30	—	pF
Output	Operating supply voltage	V _{CC}		4.5	—	17	V
	Low level output voltage	V _{OL}	I _{OL} =16mA, V _{CC} =5V, I _F =0	—	0.15	0.4	V
	High level output voltage	V _{OH}	V _{CC} =5V, I _F =4mA	3.5	—	—	V
	Low level supply current	I _{CCL}	V _{CC} =5V, I _F =0	—	1.7	3.8	mA
	High level supply current	I _{CHH}	V _{CC} =5V, I _F =1mA	—	0.7	2.2	mA
Transfer characteristics	"High-Low" Threshold input current	I _{FHL}	V _{CC} =5V, R _L =280ohm	0.1	0.4	—	mA
	"Low-High" Threshold input current	I _{FLH}	V _{CC} =5V, R _L =280ohm	—	0.5	1.0	mA
	Hysteresis	I _{FHL} / I _{FLH}	V _{CC} =5V, R _L =280ohm	—	0.8	—	—
	Isolation resistance	R _{ISO}	Ta = 25°C, DC500V	5x10 ¹⁰	10 ¹¹	—	ohm
	"High-Low" propagation delay time	t _{PHL}	Ta=25°C, V _{CC} =5V,	—	5	15	us
	"Low-High" propagation delay time	t _{PLH}	Ta=25°C, V _{CC} =5V,	—	3	9	us
	Fall time	t _f	I _F =1mA, R _L =280ohm	—	0.05	0.5	us
	Rise time	t _r	I _F =1mA, R _L =280ohm	—	0.1	0.5	us

