

SMA 4-way Power Divider 500 MHz to 18 GHz

D-4185

Description

Model D-4185 from Werbel Microwave is a wideband 4-way in-line power splitter covering of 500 MHz to 18 GHz with excellent return loss, low insertion loss, and high isolation performance.



Photo is representative.

Specifications		Min.	Typ.	Max.	Units
Frequency		500		18,000	MHz
Impedance			50		Ohm
Return Loss (Port S)		11	14		dB
Return Loss (Port 1-4)		13	18		dB
Insertion Loss (above 6.02 dB)	500-8,000 MHz		0.9	1.8	dB
	8,000-12,000 MHz		1.4	2.8	
	12,000-18,000 MHz		2.5	3.9	
Isolation	500-698 MHz	12	14		dB
	698-18,000 MHz	15	20		dB
Amplitude Balance			0.3	1.9	dB
Phase Balance			2	18	Degrees
Input Power (CW) ¹				20	Watts

Mechanical



Connector Interface	SMA-Female
Functional Temperature ²	-55 to +85 °C
Storage Temperature	-55 to +100 °C
Weight Estimate	14 oz (410 g)
Humidity	10-90% non-condensing
Environment	Indoors Use Only
CAGE Code	78YZ0


Materials

RoHS Compliant ³	Yes
REACH Compliant ³	Yes
Enclosure	Aluminum
Connectors	Stainless Steel
Contacts	Be Cu, Gold Plated
Insulators	PTFE
Finish	Gray Paint

1. All output ports should be terminated in a 50-ohm load with 1.2:1 max VSWR.
2. Electrical specifications at +25 °C only.
3. To the best of our knowledge at time of publication.

Typical Performance at +25 °C

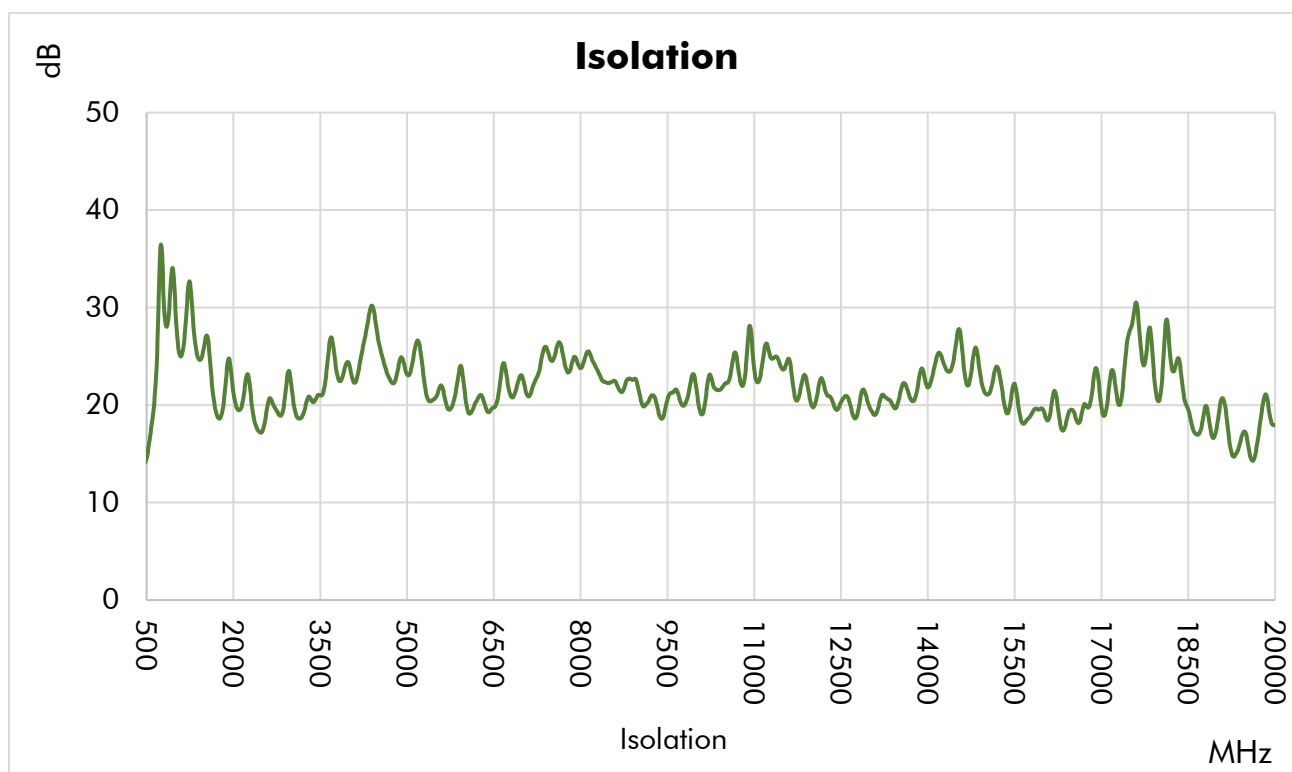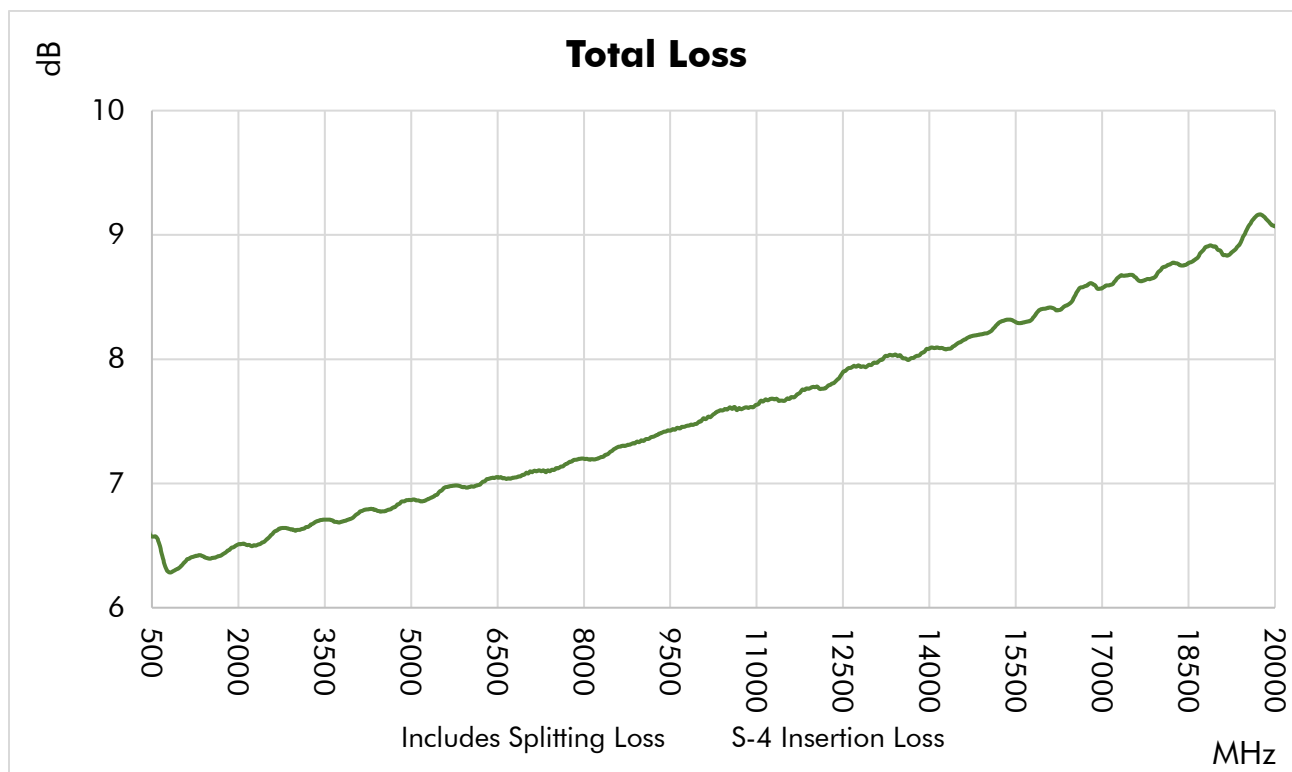


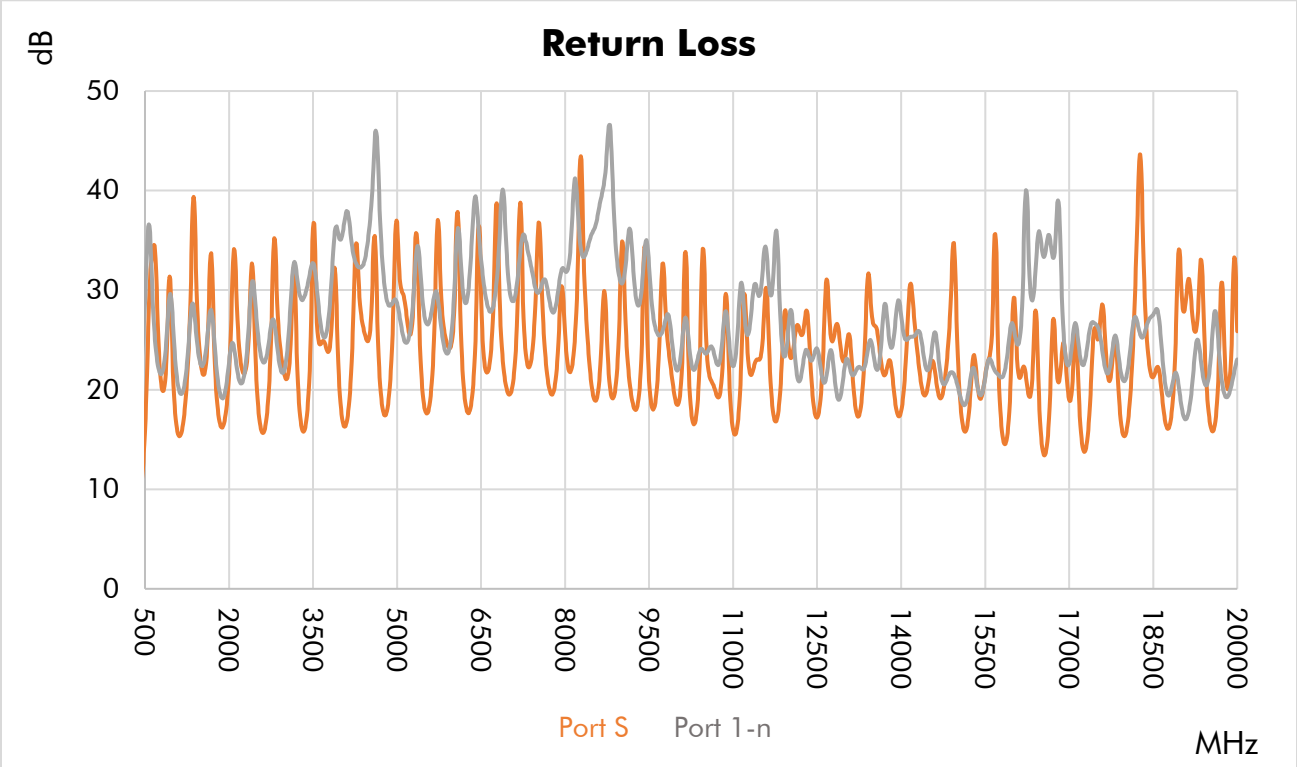

Typical Performance Data

Frequency (MHz)	Return Loss (dB)			Total Loss (dB)		Isolation (dB)
	Port S	Port 1	Port 4	S-1	S-4	
500	19.8	33.4	19.8	6.3	6.3	15.4
1000	18.1	23.2	18.1	6.4	6.4	26.6
1500	21.4	22.3	21.4	6.4	6.3	27.3
2000	25.0	24.7	25.0	6.5	6.5	20.2
2500	17.4	24.4	17.4	6.7	6.7	17.8
3000	20.9	23.4	20.9	6.7	6.6	20.5
3500	33.5	32.0	33.4	6.7	6.7	20.9
4000	16.7	35.9	16.7	6.8	6.8	23.3
4500	26.2	37.7	26.2	6.8	6.8	25.9
5000	32.3	27.8	32.1	6.8	6.8	22.9
5500	17.5	26.5	17.5	7.0	7.0	21.2
6000	28.1	31.3	28.0	7.0	7.0	19.8
6500	24.3	31.3	24.4	7.0	7.0	19.8
7000	19.6	29.5	19.6	7.1	7.1	22.1
7500	39.7	29.8	40.0	7.2	7.2	24.6
8000	23.0	31.6	23.1	7.2	7.3	23.9
8500	18.7	36.2	18.7	7.4	7.4	22.3
9000	37.8	30.6	38.0	7.3	7.4	20.8
9500	18.8	29.6	18.8	7.5	7.5	21.0
10000	18.6	22.2	18.6	7.4	7.4	20.2
10500	23.3	23.6	23.3	7.8	7.7	22.3
11000	15.2	22.6	15.2	7.6	7.7	22.5
11500	24.7	32.1	24.8	7.7	7.7	23.7
12000	23.0	29.3	23.0	7.8	7.8	19.7
12500	17.6	23.4	17.6	7.9	7.9	20.6
13000	24.5	23.4	24.4	8.1	8.1	19.4
13500	26.4	22.3	26.4	7.9	7.9	21.4
14000	18.9	25.6	18.9	8.2	8.2	21.9
14500	22.5	23.3	22.6	8.1	8.1	28.1
15000	20.7	19.7	20.7	8.3	8.3	21.0
15500	22.6	22.6	22.6	8.3	8.3	21.6
16000	29.1	25.3	29.0	8.3	8.3	18.8
16500	13.6	33.2	13.6	8.8	8.8	19.3
17000	18.7	23.4	18.7	8.6	8.6	18.8
17500	25.0	26.0	25.1	8.6	8.6	28.2
18000	15.9	21.5	15.9	8.9	8.9	21.2
18500	21.6	27.9	21.5	8.8	8.7	18.9
19000	27.7	17.4	27.6	8.6	8.7	19.0
19500	16.0	23.5	16.0	9.3	9.3	16.1
20000	22.3	23.6	22.2	9.1	9.1	18.1

Outline Dimensions

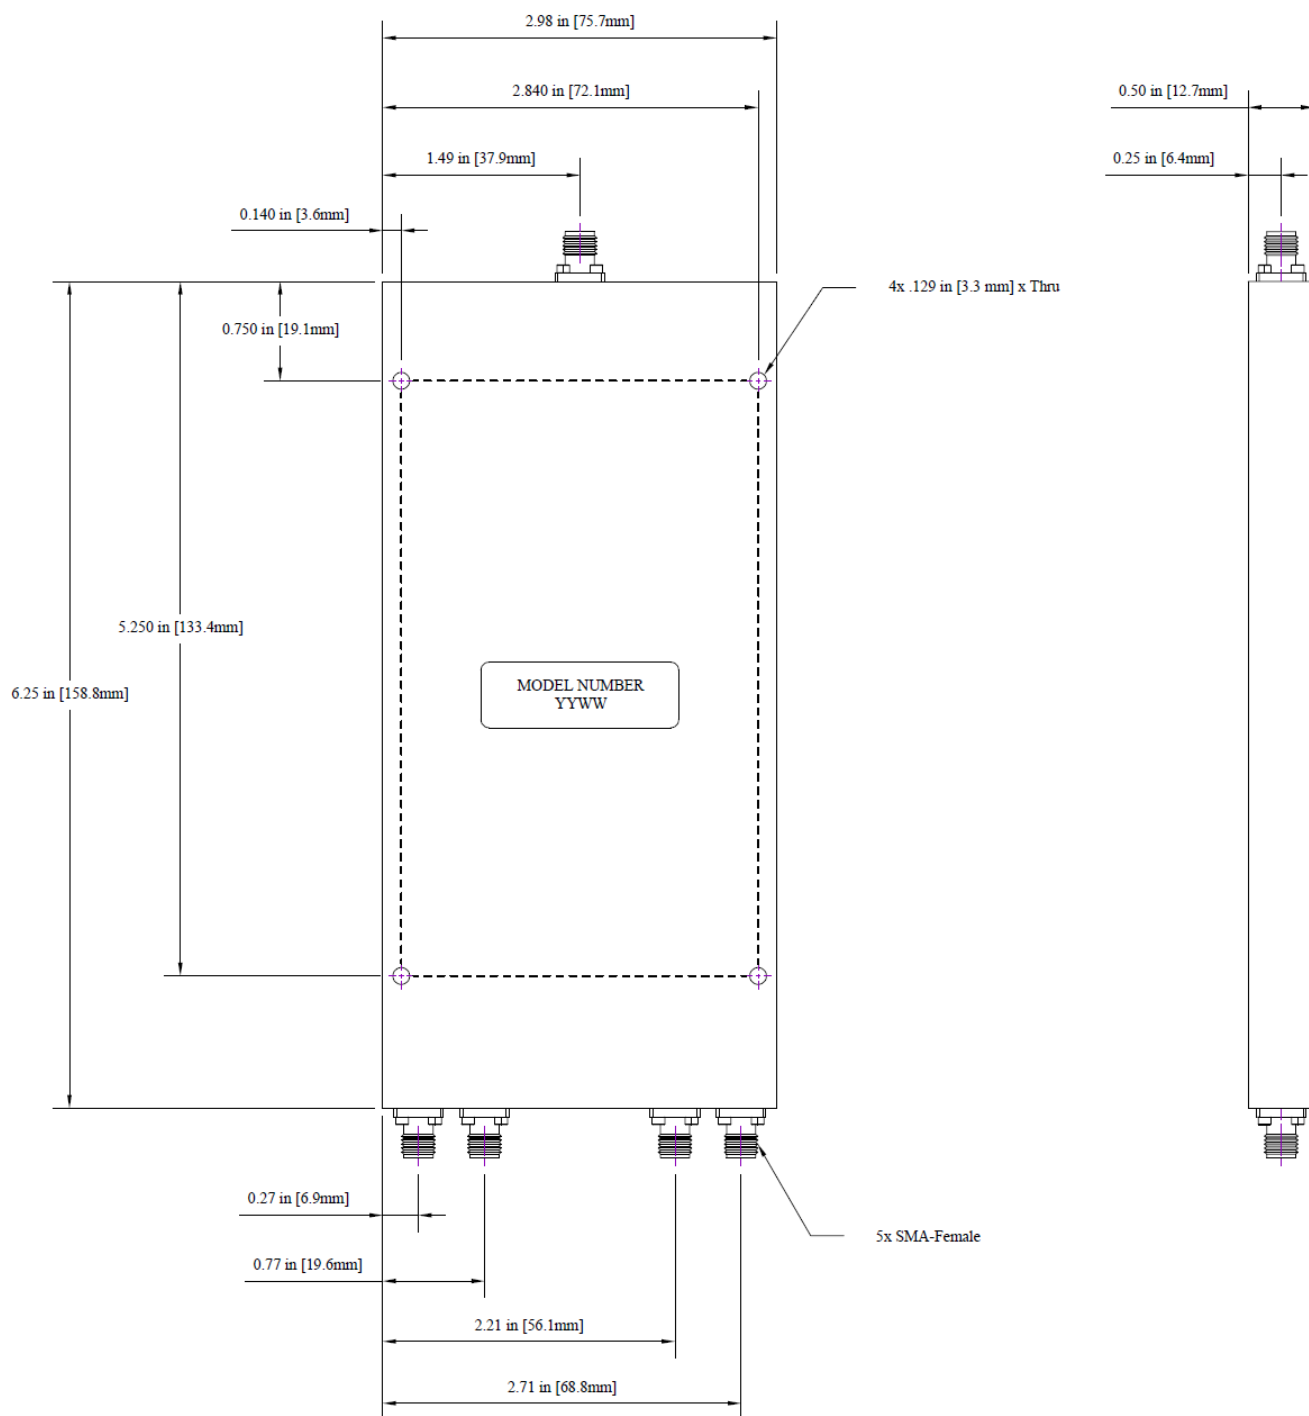

Outline drawing: OL-4185

Dimensions are in inches, [mm] shown for convenience.

Tolerances on 2-pl decimals: $\pm .03$. 3-pl decimals: $\pm .015$. Angles: $\pm 1^\circ$.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or documentation of the part, in order to implement improvements. Werbel Microwave reserves the right to make such changes as required without notice. Unless otherwise stated, all specifications are nominal. Werbel Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Werbel Microwave does not assume any liability arising out of the use of any part of documentation.