



# LFM200S SERIES 200 WATT AC-DC POWER SUPPLY WITH PFC

## Features

- Universal Input Range 85~264V<sub>ac</sub>
- High Efficiency up to 94%
- Class I
- 25.4mm Low Profile Package
- No Load Input Power Consumption<0.3W
- 48V, 54V No Load Input Power Consumption<0.4W
- Approval IEC/EN/UL 62368-1 Ed 3.0
- Approval EN 55032 and CISPR/FCC Class B
- Meets IEC/EN 60335-1
- Operating Altitude 5000m
- Continuous Short Circuit Protection
- Over Voltage Protection
- Over Temperature Protection
- High Power Density 32.89W/Inches<sup>3</sup>
- Active PFC Function
- Over Voltage Category OVC II & OVC III



MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT			RIPPLE & NOISE NOTE1	VOLTAGE ACCURACY NOTE2	VOLTAGE ADJ. RANGE	LINE REGULATION NOTE3	LOAD REGULATION NOTE4	% EFF. (Typ.) NOTE5
		With Fan NOTE6	With Conduction Cooling NOTE7							
			Baseplate	Cover						
LFM200S120	12 V	16.67 A	10.83 A	14.17 A	150 mV	±1%	11.4-12.6 V	±0.2%	±0.5%	92%
LFM200S150	15 V	13.33 A	8.66 A	11.33 A	150 mV	±1%	14.25-15.75 V	±0.2%	±0.5%	92%
LFM200S240	24 V	8.33 A	5.41 A	7.08 A	200 mV	±1%	22.8-25.2 V	±0.2%	±0.5%	94%
LFM200S280	28 V	7.14 A	4.64 A	6.07 A	200 mV	±1%	26.6-29.4 V	±0.2%	±0.5%	93%
LFM200S300	30 V	6.66 A	4.33 A	5.67 A	200 mV	±1%	28.5-31.5 V	±0.2%	±0.5%	93%
LFM200S360	36 V	5.55 A	3.61 A	4.72 A	200 mV	±1%	34.2-37.8 V	±0.2%	±0.5%	94%
LFM200S480	48 V	4.16 A	2.71 A	3.54 A	200 mV	±1%	45.6-50.4 V	±0.2%	±0.5%	94%
LFM200S540	54 V	3.7 A	2.41 A	3.15 A	200 mV	±1%	51.3-56.7 V	±0.2%	±0.5%	93%

Note:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.
2. Voltage accuracy is set at full load.
3. Line regulation is measured from 100V<sub>ac</sub> to 240V<sub>ac</sub> with full load.
4. Load regulation is measured from 10% to 100% full load.
5. Typical efficiency at 230 V<sub>ac</sub> and full load at 25°C.
6. Forced air convection with 14CFM above 110V<sub>ac</sub>.
7. With addition cooling conduction plate, 17.78 by 17.78 cm with min. 0.2 cm thick, as below.



# LFM200S Series

## PART NUMBER

Series	Number of Outputs	Nominal Output Voltage	Type	Mounting Inserts
LFM200	O	XXX	X	-YZ
LFM200	S : Single	120 : 12V 150 : 15V 240 : 24V 280 : 28V 300 : 30V 360 : 36V 480 : 48V 540 : 54V	B : With Baseplate C : With Cover	Blank : Through Hole C0 : Threaded Hole

Part Number Example:

**LFM200S120C-C0:** With Cover 200W, Single 12V<sub>dc</sub> Output, Threaded Hole

**LFM200S240B:** With Baseplate 200W, Single 24V<sub>dc</sub> Output, Through Hole



# LFM200S Series

## TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

### ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Safety approvals only to the AC input	All	85		264	$V_{ac}$
			115		370	$V_{dc}$
Operating Temperature	<b>See derating curve</b>	All	-40		80	°C
Operating Case Temperature	At the center of base plate ( $T_c$ = Case temperature)	All	-40		90	°C
Storage Temperature		All	-40		90	°C
Operating Altitude	IEC/EN/UL 62368-1 OVC II	All			5000	m
	IEC/EN/UL 62368-1 OVC III				2000	

### INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Voltage Range		All	100		240	$V_{ac}$
Input Frequency Range		All	47		63	Hz
Maximum Input Current	100% Load, $V_{in}=100V_{ac}$	All			3.15	A
Leakage Current	Contact leakage current Earth leakage current	All			100 300	$\mu A$
Inrush Current	$V_{in}=240V_{ac}$ , Cold Start @25°C	All			85	A
Power Factor	230 $V_{ac}$ @ Full load	All	0.96	0.98		

### OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	$V_{in}$ =Nominal $V_{in}$ , $I_o=I_o$ max., $T_c=25^\circ C$	LFM200S120	11.88	12	12.12	$V_{dc}$
		LFM200S150	14.85	15	15.15	
		LFM200S240	23.76	24	24.24	
		LFM200S280	27.72	28	28.28	
		LFM200S300	29.7	30	30.3	
		LFM200S360	35.64	36	36.36	
		LFM200S480	47.52	48	48.48	
Operating Output Current Range	$V_{in}=85V_{ac}\sim 264V_{ac}$ , <b>see derating curve</b>	LFM200S120	0		16.67	A
		LFM200S150	0		13.33	
		LFM200S240	0		8.33	
		LFM200S280	0		7.14	
		LFM200S300	0		6.66	
		LFM200S360	0		5.55	
		LFM200S480	0		4.16	
LFM200S540	0		3.7			
Holdup Time	$V_{in}=115V_{ac}$	All	10	12		ms
Output Voltage Regulation						
Load Regulation	10% Load to full load	All			$\pm 0.5$	%
Line Regulation	$V_{in}$ =High line to low line	All			$\pm 0.2$	%
Output Voltage Adjustment	$P_o \leq$ max. rated power, $I_o \leq I_o$ max.	All	-5		+5	%



# LFM200S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Over Voltage Protection	Latch off (AC recycle to reset)	LFM200S120			16	V <sub>dc</sub>
		LFM200S150			20	
		LFM200S240			32	
		LFM200S280			35	
		LFM200S300			35	
		LFM200S360			45	
		LFM200S480			55	
		LFM200S540			63	
Over Current Protection	Auto recovery (output is rated load)	All	120	145	175	%
Short Circuit Protection	Auto recovery	All				
Over Temperature Protection	Auto recovery	All				
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output 2. Oscilloscope is 20MHz band width. 3. Ambient Temperature=25°C	LFM200S120			150	mV
		LFM200S150			150	
		LFM200S240			200	
		LFM200S280			200	
		LFM200S300			200	
		LFM200S360			200	
		LFM200S480			200	
		LFM200S540			200	
Load Capacitance	1. V <sub>in</sub> =115V <sub>ac</sub> and 230V <sub>ac</sub> 2. Output is max. load 3. Ambient temperature=25°C	LFM200S120			6800	uF
		LFM200S150			5360	
		LFM200S240			3440	
		LFM200S280			3440	
		LFM200S300			3220	
		LFM200S360			2680	
		LFM200S480			2000	
		LFM200S540			1560	
Efficiency	1. Input Voltage is 230V <sub>ac</sub> 2. Output is rated load 3. Ambient temperature=25°C	LFM200S120		92		%
		LFM200S150		92		
		LFM200S240		94		
		LFM200S280		93		
		LFM200S300		93		
		LFM200S360		94		
		LFM200S480		94		
		LFM200S540		93		

## ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input to Output	1 Minute (without dielectric breakdown)	All			4250	V <sub>ac</sub>
Input to Earth (Ground)	1 Minute (without dielectric breakdown)	All			2000	V <sub>ac</sub>
Output to Earth (Ground)	1 Minute (without dielectric breakdown)	All			2000	V <sub>ac</sub>
Isolation Resistance	Input to output	All	100			MΩ

## FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency		15V		130		kHz
		Others		110		



# LFM200S Series

## GENERAL SPECIFICATIONS





PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	I <sub>o</sub> =100%; T <sub>a</sub> =25°C per MIL-HDBK-217F I <sub>o</sub> =100%; T <sub>a</sub> =25°C per Telcordia SR332	All	450 2800			k hours
Life Time (Detail refer to Application Note)	Conduction cooling @75% Load, 40°C Fan cooling @75% Load, 40°C	All		110 179		k hours
Humidity	Non-condensing	All			93	% RH
Shock	Meet MIL-STD-810F Table 516.5, Table 516.5-I 10ms, each axis 3 times(±X、±Y、±Z axis)	All		75		g
Vibration	Meet MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X、Y、Z axis, 1 hour (each axis), Total 3 hrs.	All		4		g
Weight	Baseplate versions Covered versions	LFM200SXXXB LFM200SXXXC		130 220		grams
Dimensions	Baseplate versions Covered versions	LFM200SXXXB LFM200SXXXC	3.04x2.00x1.00 Inches (77.2x50.8x25.4 mm) 3.09x2.28x1.00 Inches (78.6x57.9x25.4 mm)			
<b>Safety</b>	Class I, IEC/EN/UL 62368-1					Ed. 3.0
<b>EMC Emission</b>	EN 55032, EN 61000-6-4, EN 61204-3, EN 61000-3-2, EN 61000-3-3, 47 CFR FCC Part 15					
Conducted Disturbance	EN 55032, 47 CFR FCC Part 15					Class B
Radiated Disturbance	EN 55032, 47 CFR FCC Part 15					Class B
Harmonic Current Emissions	EN 61000-3-2					Class A, C, D
Voltage Fluctuations & Flicker	EN 61000-3-3					Criterion A
<b>EMC Immunity</b>	EN 55035, EN 61000-6-2, EN 61204-3					
Electrostatic Discharge (ESD)	IEC 61000-4-2, Level 3: Air Discharge: ±8kV, Level 2: Contact Discharge: ±4kV					Criterion A
Radio-Frequency, Continuous Radiated Disturbance	IEC 61000-4-3, Level 3: 80~2700MHz, 10V/m					Criterion A
Electrical Fast Transient (EFT)	IEC 61000-4-4, Level 3: ±2kV					Criterion A
Surge	IEC 61000-4-5, Level 4: L-N: ±2kV, L-E (Ground): ±4kV					Criterion A
Conducted Disturbances, Induced by RF Fields	IEC 61000-4-6, Level 3: 0.15~80MHz, 10V					Criterion A
Power Frequency Magnetic Field	IEC 61000-4-8, Level 4: 30A/m					Criterion A
Voltage Dips	IEC/EN 61000-4-11, Dip: 30% Reduction					Criterion A
	IEC/EN 61000-4-11, Dip >95% Reduction					
Voltage Interruptions	IEC/EN 61000-4-11, >95% Reduction					Criterion B
Application Note Link						<a href="#">LFM200S Series App Notes</a>





# LFM200S Series

## CHARACTERISTIC CURVE

### Power Derating Curve

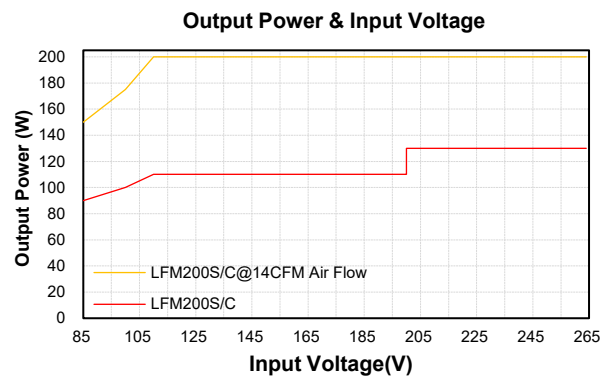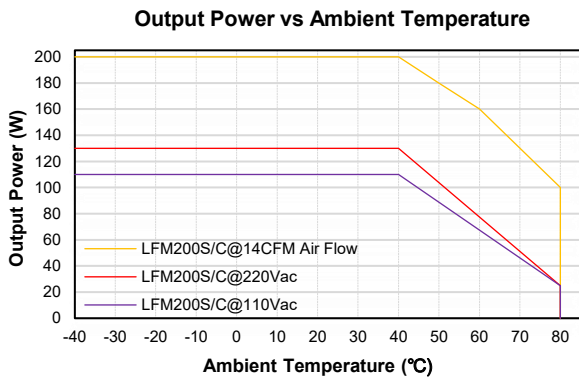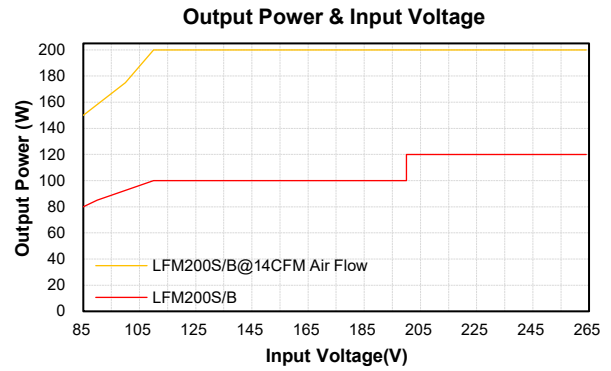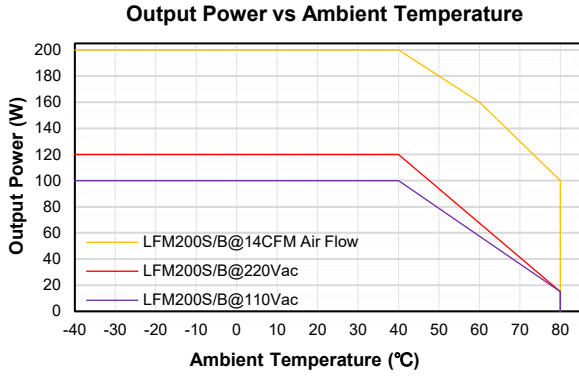


### Conduction Convection with External Baseplate (17.78cmx17.78cmx0.2cm)

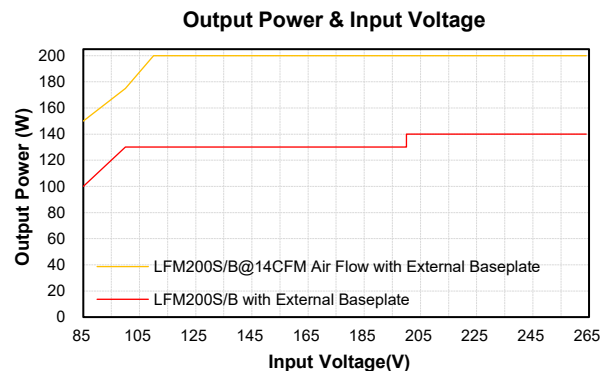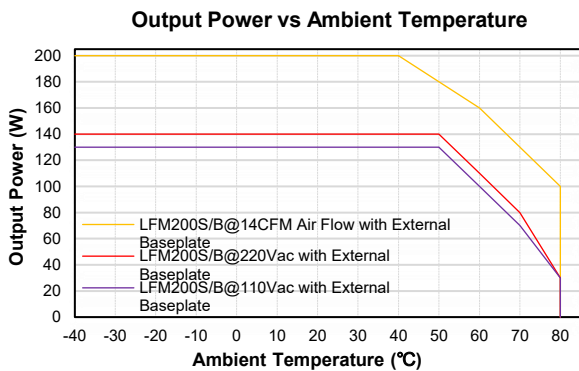




# LFM200S Series


Output Power vs Ambient Temperature

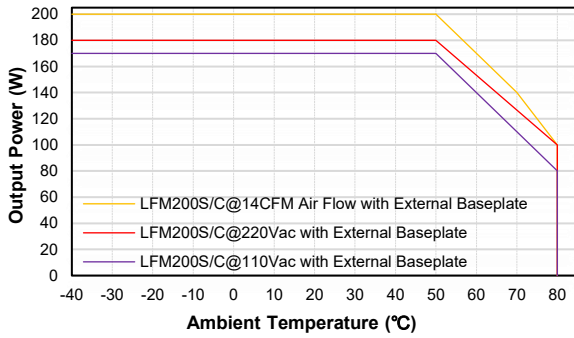

Output Power & Input Voltage

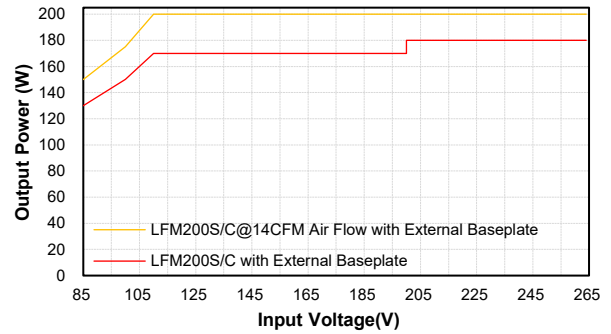


Output Power vs Case Temperature ( $T_c$ )

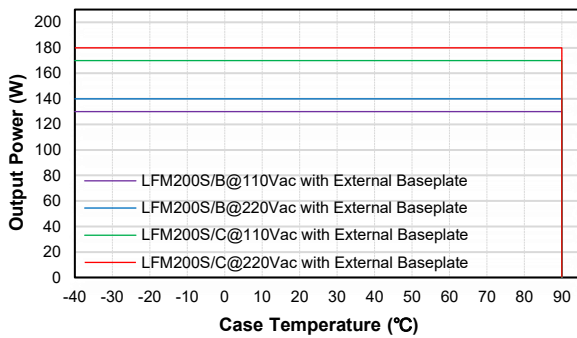


## Performance Data


LFM200S120 (Eff Vs  $I_o$ )

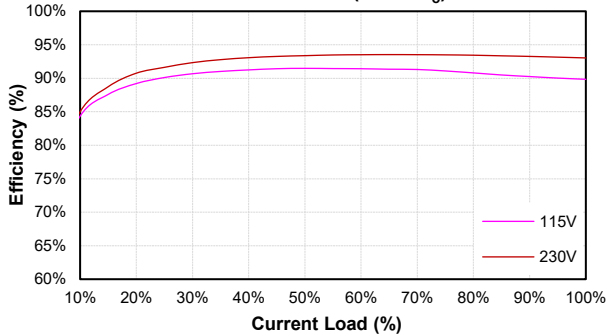


LFM200S150 (Eff Vs  $I_o$ )

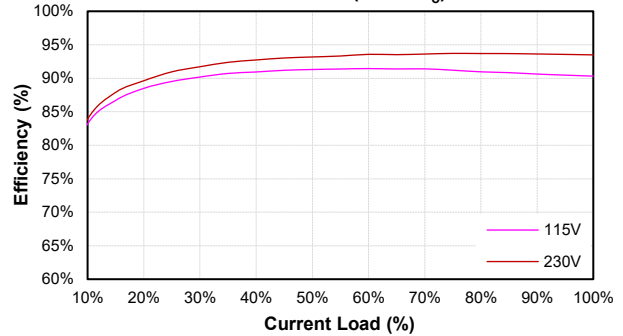

LFM200S240 (Eff Vs  $I_o$ )

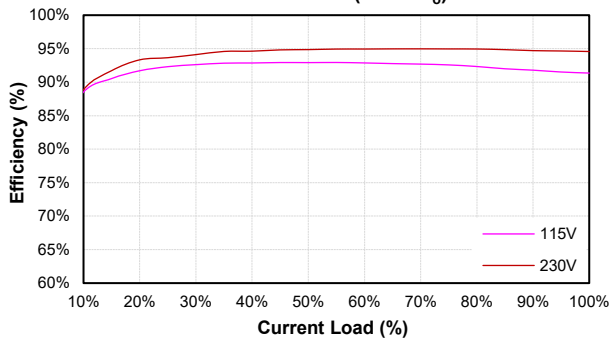


LFM200S280 (Eff Vs  $I_o$ )

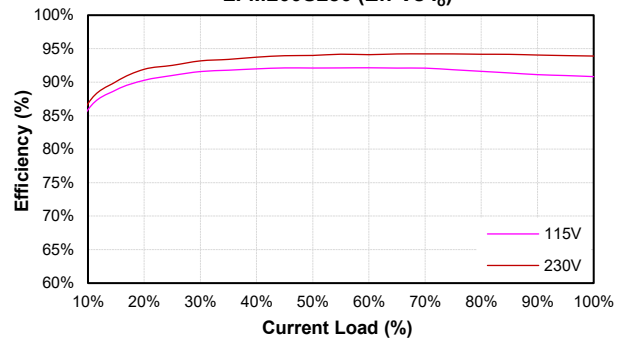




# LFM200S Series


LFM200S300 (Eff Vs  $I_o$ )

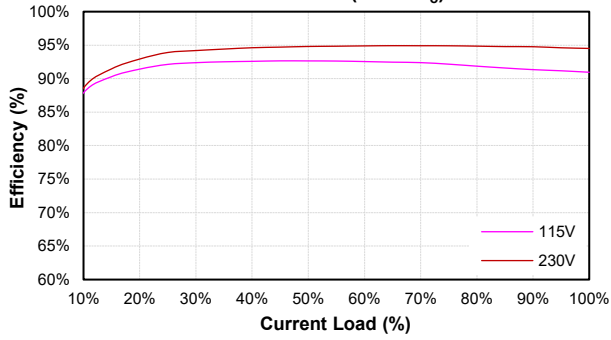


LFM200S360 (Eff Vs  $I_o$ )

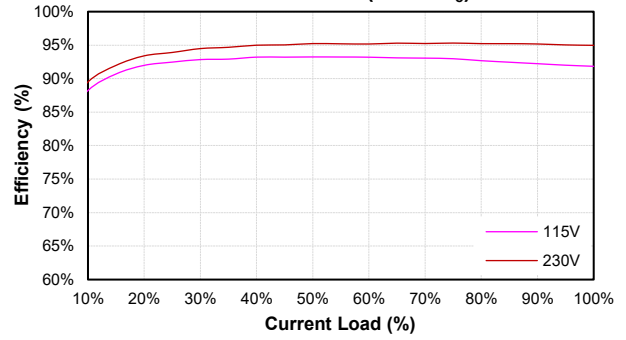

LFM200S480 (Eff Vs  $I_o$ )

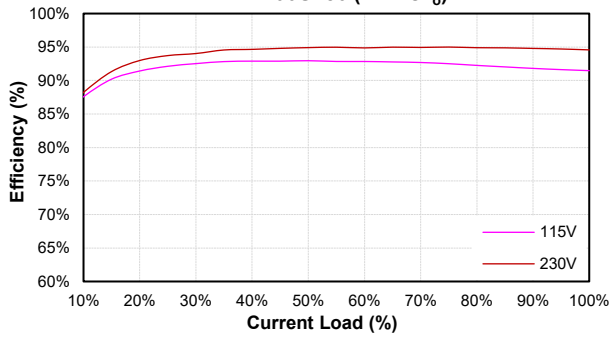



LFM200S540 (Eff Vs  $I_o$ )

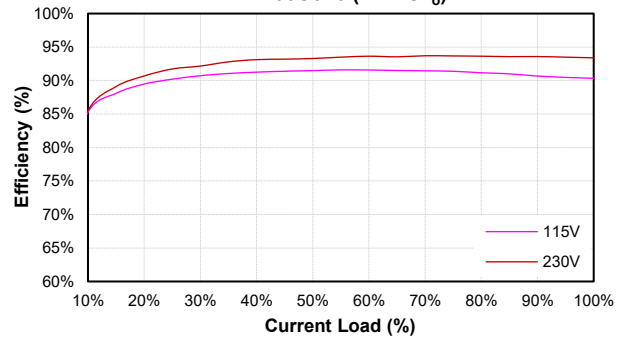



# LFM200S Series

## MECHANICAL SPECIFICATION

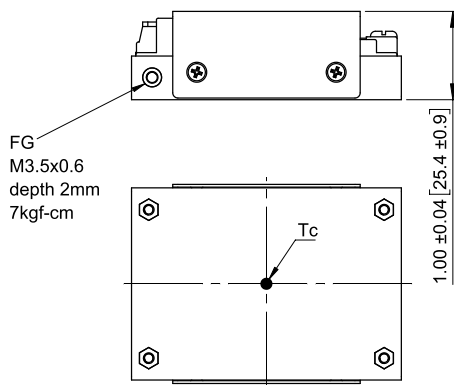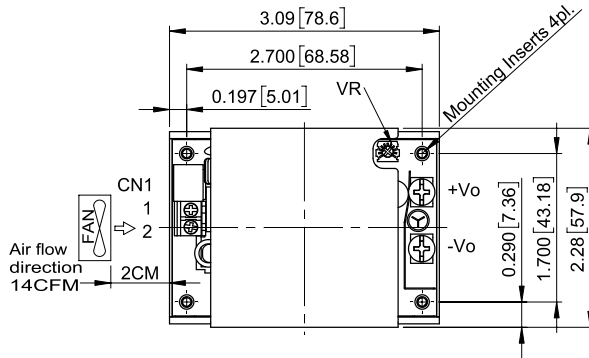

### LFM200SXXXC LFM200SXXXC-C0

All Dimensions in Inches[mm]  
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020  
 Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1):ECE ETB22



Pin	Function	Mating Wire Range
1	ACL	14~18 AWG
2	ACN	

DC Output Connector:KANG YANG PCB-58M4

Function	The screw locked torque
+Vo	M4 7kgf-cm
-Vo	

Mounting Inserts

Series	Option
Blank	∅3.2 Through depth 10.5mm
-C0	M3x0.5 Threaded depth 10.5mm

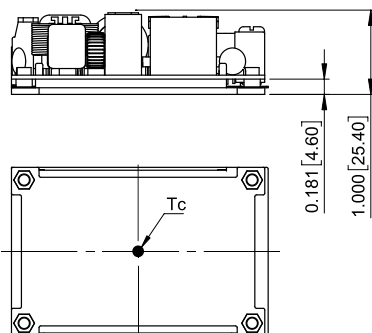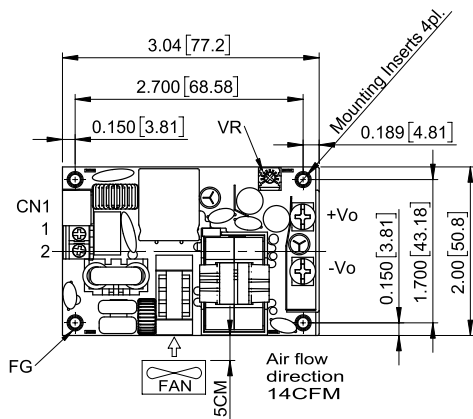

### LFM200SXXXB LFM200SXXXB-C0

All Dimensions in Inches[mm]  
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020  
 Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1):ECE ETB22

Pin	Function	Mating Wire Range
1	ACL	14~18 AWG
2	ACN	

DC Output Connector:KANG YANG PCB-58M4

Function	The screw locked torque
+Vo	M4 7kgf-cm
-Vo	

Mounting Inserts

Series	Option
Blank	∅3.2 Through depth 8.1mm
-C0	M3x0.5 Threaded depth 8.1mm

CINCON Electronics Co. Ltd.  
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan  
 Tel: 886-2-27086210  
 Fax: 886-2-27029852  
 E-mail: [sales@cincon.com.tw](mailto:sales@cincon.com.tw)  
 Web: [www.cincon.com](http://www.cincon.com)