


LINEAR SYSTEMS

Over Three Decades of Quality Through Innovation

LS3550 SERIES

MONOLITHIC DUAL
PNP TRANSISTORS

FEATURES	
6 LEAD SOT-23 SURFACE MOUNT PACKAGE*	
TIGHT MATCHING ¹	2mV
EXCELLENT THERMAL TRACKING ¹	3 μ V/ $^{\circ}$ C
ABSOLUTE MAXIMUM RATINGS ²	
@ 25 $^{\circ}$ C (unless otherwise stated)	
Maximum Temperatures	
Storage Temperature	-55 to +150 $^{\circ}$ C
Operating Junction Temperature	-55 to +150 $^{\circ}$ C
Maximum Power Dissipation	
Continuous Power Dissipation	TBD
Maximum Currents	
Collector Current	50mA
Maximum Voltages	
Collector to Collector Voltage	60V

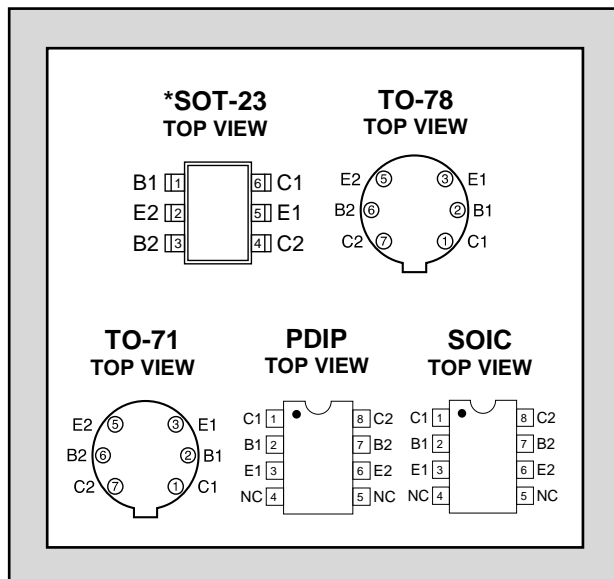

MATCHING ELECTRICAL CHARACTERISTICS @25 $^{\circ}$ C (unless otherwise stated)


SYMBOL	CHARACTERISTIC	LS3550A		LS3550B		LS3550C		UNIT	CONDITIONS
		MIN	MAX	MIN	MAX	MIN	MAX		
$ V_{BE1} - V_{BE2} $	Base to Emitter Voltage Differential		2		5		10	mV	$I_C = -100\mu A, V_{CE} = -5V$
$\frac{ V_{BE1} - V_{BE2} }{\Delta T}$	Base to Emitter Voltage Differential Change with Temperature		3		5		15	$\mu V/^{\circ}C$	$I_C = -100\mu A, V_{CE} = -5V$ $T_A = -40^{\circ}C$ to $+85^{\circ}C$
$ I_{B1} - I_{B2} $	Base Current Differential		10		10		10	nA	$I_C = -10\mu A, V_{CE} = -5V$
$\frac{ I_{B1} - I_{B2} }{\Delta T}$	Base Current Differential Change with Temperature		0.5		0.5		1.0	nA/ $^{\circ}C$	$I_C = -10\mu A, V_{CE} = -5V$ $T_A = -40^{\circ}C$ to $+85^{\circ}C$
$\frac{h_{FE1}}{h_{FE2}}$	Current Gain Differential		10		10		15	%	$I_C = -1mA, V_{CE} = -5V$

ELECTRICAL CHARACTERISTICS @25 $^{\circ}$ C (unless otherwise stated)

SYMBOL	CHARACTERISTIC	LS3550A		LS3550B		LS3550C		UNIT	CONDITIONS
		MIN	MAX	MIN	MAX	MIN	MAX		
BV_{CBO}	Collector to Base Breakdown Voltage	-45		-40		-20		15	$I_C = -10\mu A, I_E = 0A$
BV_{CEO}	Collector to Emitter Breakdown Voltage	-45		-40		-20		16	$I_C = -5mA, I_B = 0A$
BV_{CCO}	Collector to Collector Breakdown Voltage	± 60		± 60		± 60		V	$I_{CC} = \pm 1\mu A, I_B = I_C = 0A$
BV_{EBO}	Emitter to Base Breakdown Voltage ³	-6.0		-6.0		-6.0			$I_E = -10\mu A, I_C = 0A$
$V_{CE(SAT)}$	Collector to Emitter Saturation Voltage		-0.50		-0.50		-1.2		$I_C = -10mA$ $I_B = -1mA$

ELECTRICAL CHARACTERISTICS CONT. @25 °C (unless otherwise stated)

SYMBOL	CHARACTERISTIC	LS3550A		LS3550B		LS3550C		UNIT	CONDITIONS
		MIN	MAX	MIN	MAX	MIN	MAX		
h _{FE}	DC Current Gain	150		100		50			I _C = -1mA, V _{CE} = -5V
		120		80		40			I _C = -10mA, V _{CE} = -5V
		100		60		30			I _C = -35mA, V _{CE} = -5V
I _{CBO}	Collector Cutoff Current		-0.35		-0.35			nA	I _E = 0A, V _{CB} = -30V
I _{EBO}	Emitter Cutoff Current		-0.35		-0.35		-0.35		I _E = 0A, V _{CB} = -20V
									I _E = 0A, V _{CB} = -3V
I _{C1C2}	Collector to Collector Leakage Current		±1		±1		±1	µA	V _{CC} = ±60V, I _B =I _C =0A
C _{OBO}	Output Capacitance		2		2		2	pF	I _E = 0A, V _{CB} = -10V
f _T	Gain Bandwidth Product (Current)		600		600		600	MHz	I _C = -1mA, V _{CE} = -5V
NF	Noise Figure (Narrow Band)		3		3		3	dB	I _C = -100µA, V _{CE} = -5V BW = 200Hz R _B = 10Ω, f = 1kHz

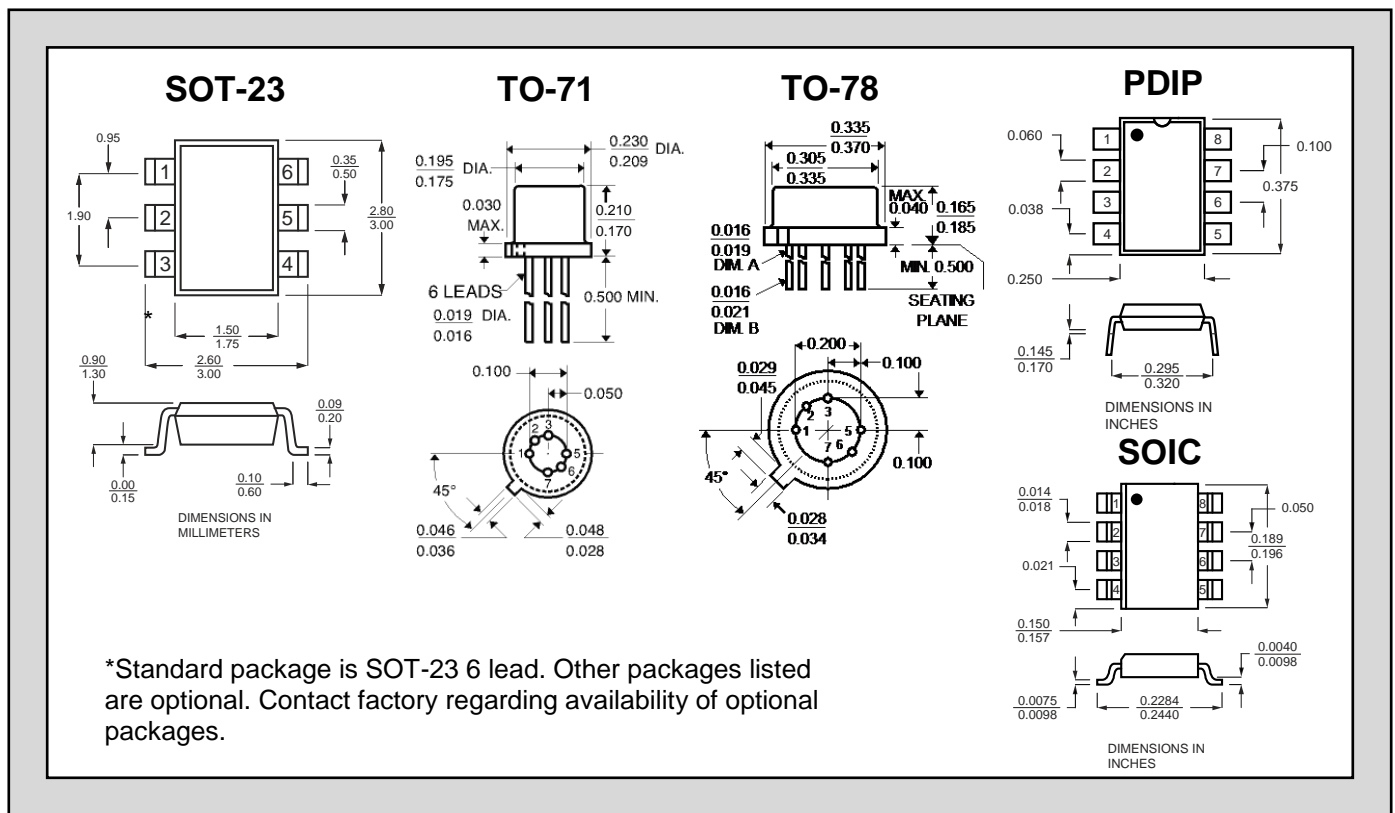

NOTES

1. Maximum rating for LS3550A, SOT23-6.
2. Absolute maximum ratings are limiting values above which serviceability may be impaired.
3. The reverse Base-to-Emitter voltage must never exceed -6.0 Volts. The reverse Base-to-Emitter current must never exceed -10µA.

Information furnished by Linear Integrated Systems is believed to be accurate and reliable. However, no responsibility is assumed for its use; nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Linear Integrated Systems.

Linear Integrated Systems (LIS) is a 25-year-old, third-generation precision semiconductor company providing high-quality discrete components. Expertise brought to LIS is based on processes and products developed at Amelco, Union Carbide, Intersil and Micro Power Systems by company President John H. Hall. Hall, a protégé of Silicon Valley legend Dr. Jean Hoerni, was the director of IC Development at Union Carbide, Co-Founder and Vice President of R&D at Intersil, and Founder/President of Micro Power Systems.