



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司

SPECIFICATION

CUSTOMER :

MODULE NO.: TST0004R3H4111XXXX03

General Specification

Construction:

Construction	Materials	Comment
Cover lens	glass	Thickness: 0.7mm
LOCA	Adhesive	Thickness: 0.15mm
ITO Glass	ITO glass	Thickness: 0.70mm


Mechanical characteristics:

Item	Description	Unit
Outside Dimension	104.8±0.15*66.5±0.15	mm
View Area	97±0.20*56±0.20	mm
Active Area	97.4±0.20*56.4±0.20	mm
Thickness	1.55±0.10 (Without AD)	mm
Input Method	Finger	
Hardness Of Surface	Hard Surface : ≥7H	
Accuracy	+/-1mm@10mm	mm
Support Operation	Finger	5 Finger
Channel	9*15	
Interface	I2C	
Supported Operating Systems	Android2.0-4.2Windows	
Controller IC	FT5426DQ8	

Interface Pin Function

NO.	Pin Name
1	VSS
2	VDDT
3	SCL
4	NC
5	SDA
6	NC
7	RST
8	NC
9	INT
10	VSS

Contour Drawing

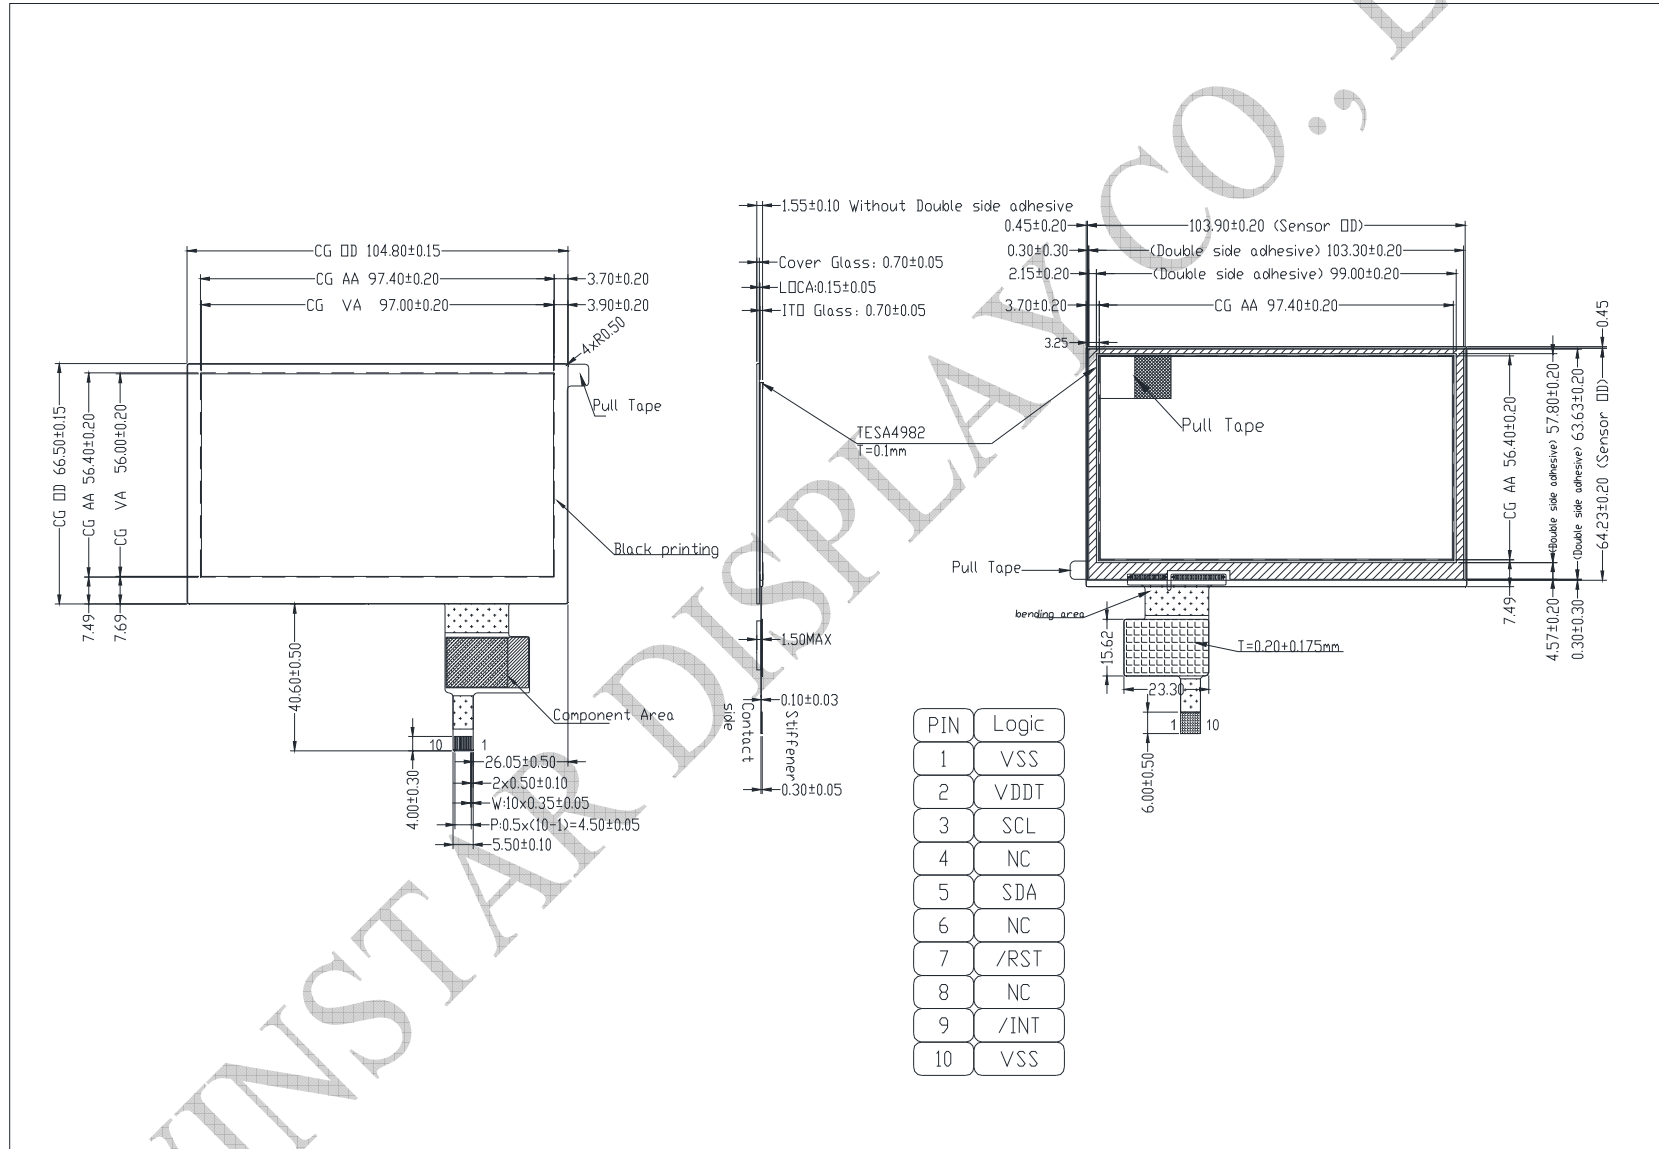

PIN	Logic
1	VSS
2	VDDT
3	SCL
4	NC
5	SDA
6	NC
7	/RST
8	NC
9	/INT
10	VSS