

## single high speed high isolation RS485 isolation transceiver module



# PART NUMBER SYSTEM TDHx01D485H

Rate
Interface signal type
Package
Serial Number
Isolation power output
Power input
Isolation voltage
 Single Type

# FEATURES

- Two-terminal isolation ( input and output are mutually isolated)
- Integrated Isolated DC/DC converter
- Bus protection
- Isolation voltage :3.75KVAC
- Operating temperature range:-40°C~+105°C
- Baud rate 115200bps
- Connect up to 32 nodes on one bus

TDH301D485H/TDH501D485H series are transceiver isolation module with integrated power isolation, electrical isolation, and RS485 interface bus protector; The traditional isolation RS485 circuits uses a piece of power isolation module, three optocouplers and RS485 transceiver chip to realize the application. Now only a RS485 transceiver module can realize the functions. Simplify the customers on the isolation requirements of the design; Products can be easily embedded in the user equipment, achieve function of RS485 network connection.

Selection Guide			
Part No.	Power Supply input (VDC)		
TDH301D485H	3.17~3.45		
TDH501D485H	4.75~5.25		

Input Spe	ecifications			
ltem	Operating Conditions		Value	
Power Input Send current	Products energized,	TDH301D485H	≤50mA	
	Sidlic culieni	no communication	TDH501D485H	≤40mA
	Condouwant	115200bps Square wave	TDH301D485H	≤100mA
	Send current	communication	TDH501D485H	≤80mA
		TD301D485H		Compatible with + 3.3 V UART interface
Single Input	Serial interface	TD501D485H		Compatible with + 5 V UART interface
Pin current				l <sub>TXD</sub> ≤2mA; l <sub>RXD</sub> ≤2mA; l <sub>CON</sub> ≤5mA

<b>Bus Inter</b>	Bus Interface				
Item		Operating Conditions	Value		
Output	RS485 bus interface		Standard interface RS485, pull-up and pull-down resistor, whose value is 5.1K, have been set to A/B line.		

Transmission Specific	ations					
Item	Operating Conditions	Value				
Data Rate		115200bps (n	nax.)			
Transceiver Switching Delay		The delay tin 30µs (min.), 1	ne from the re 00µs (max.).	eceiving data	i switch to the	ə send data:
The Number of Nodes		Connect up to 32 nodes on one bus				
Transceiver control		Contrary to common RS485 transceiver control level				
		Control Input Output				
Truth Table	Con dia a Otati a	CON	TXD	Α	В	Line state
	Sending Status	0	1	1	0	Normal
		0	0	0	1	Normal

**MORNSUN®** 

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

# Industrial Bus TDHx01D485H Series

# **MORNSUN®**

		Control	Control Input	Output
Truth Table	Deach dear Statu	CON	A-B	RXD
Truth Table	Receiving Status	1	≥0.2V	1
		1	≪-0.2V	0

General Specifications				
ltem	Operating Conditions	Value		
Electric Isolation		Two-terminal isolation (input and output are mutually isolated)		
Degree of Isolation	testing for 1 minute, leakage current <5mA, humidity <95%	3.75KVAC		
Operating Temperature		<b>-40°C∼ +85°</b> C		
Transportation and Storage Temperature		-55 ~ +105℃		
Operating Humidity		10% ~ 90%		
Max. Operating Temperature for casing	<b>Tα=25</b> ℃	25℃ (Тур.)		
Application Environment		The presence of dust, fierce vibration, impulsion and corrosive gas may cause damage to the product		

Physical Specifications	
Casing Material	Black flame-retardant heat-proof plastic
Package	DIP10
Weight	4.0g(Typ.)
Cooling Method	Free convection

EMC	Specific	ations				
EMI	CE	CISPR22/EN55022	CLASS A (see 2-2) for recomm	CLASS A (see 2-2) for recommended circuit)		
CIVII	RE	CISPR22/EN55022	CLASS A (see 2-2) for recomm	CLASS A (see 2-2) for recommended circuit)		
	ESD	IEC/EN61000-4-2	Contact ±4KV		perf. Criteria B	
	EFT	IEC/EN61000-4-4	Power supply port ±2KV	(see 2- $\!\!1\!$ for recommended circuit)	perf. Criteria B	
	CFI	IEC/EN61000-4-4	Signal port ±1KV	(see 2- $3$ for recommended circuit)	perf. Criteria B	
	EMS	urge IEC/EN61000-4-5	Power supply port ±1KV	(see 2- $\!\!1\!$ for recommended circuit)	perf. Criteria B	
EMS			Signal port ±0.25KV/±0.5KV	(see 2- $3$ for recommended circuit)	perf. Criteria B	
	Surgo		Signal port ±0.5KV/±1KV	(see 2- $3$ for recommended circuit)	perf. Criteria B	
	Suige		Signal port ±1KV/±2KV	(see 2- $3$ for recommended circuit)	perf. Criteria B	
			Signal port ±2KV/±4KV	(see 2- $3$ for recommended circuit)	perf. Criteria B	
			Signal port ±4KV/±6KV	(see 2-3) for recommended circuit)	perf. Criteria B	

### **Application Precautions**

- 1. Please read the technical manual carefully before use; contact our technical support if you have any problem.
- 2. Do not use the product in hazardous areas.
- 3. Use DC power supply for the product and 220V AC power supply is prohibited.
- 4. Do not dismount and assemble the product without permission to avoid failure or malfunction of equipment.

#### After-sales service

- 1. Ex-factory inspection and quality control have been strictly conducted for the product; if there occurs abnormal operation or possibility of failure of internal module, please contact the local representative or our technical support.
- 2. The warranty period for the product is 3 years as calculated from the date of delivery. If any quality problem occurs under normal use within the warranty period, the product can be repaired or changed for free.

#### Applied circuit

Please refer to Isolated Transmitter application notes.



MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.


2015.05.21-A/1 Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation


**MORNSUN**<sup>®</sup>

# Design Reference

1.Typical application

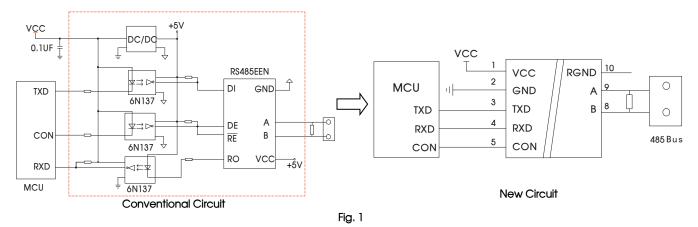

# 2. EMC solution-recommended circuit

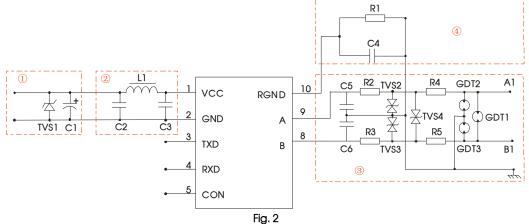

Recommended external circuit parameters:

Madal	TD301D485H/TD501D485H					
Model	±0.25KV/±0.5KV	±0.5KV/±1KV	±1KV/±2KV	±2KV/±4KV	±4KV/±6KV	
C1	220uF/10V(Electr	olytic capacitor)	220uF/1	0V(Electrolytic cap	bacitor)	
TVS1		SMCJ5.0A (TD30	1D485H) / SMCJ6.5	A(TD501D485H)		
C2/C3	luF/	50V		1uF/50V		
LI	10	μH		10µH		
C5/C6	100pF	/100V		100pF/100V		
C4	lnF/	InF/2KV		1nF/2KV		
RI	1ΜΩ			1ΜΩ		
TVS2/TVS3/TVS4	SMBJ	SMBJ15CA SMBJ15CA				
R4/R5			10Ω/2W(Wire- wound resistor)	10Ω/2W(Wire- wound resistor)	10Ω/2W(Wire wound resistor)	
R2/R3	10Ω/1W(Wire- wound resistor)	10Ω/2W(Wire- wound resistor)				
GDT1/GDT2/GDT3			G30-A90X	S30-A90X	S50-A90X	

/ ± 6KV" hierarchy, GDT4, GDT5 and GDT6 empathy, as B3D090L-C.
It is not needed the component when parameter with the symbol of "-".


## 3. For more information please find the application notes on www.mornsun-power.com

**MORNSUN**<sup>®</sup>


MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2015.05.21-A/1 Page 3 of 4

## Dimensions and Recommended Layout

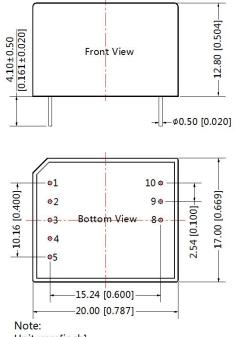

Unit :mm[inch] Pin diameter tolerances :±0.10[±0.004] General tolerances:±0.25[±0.010]

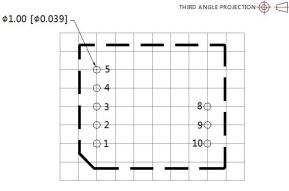

**MORNSUN®** 

Note: Grid 2.54\*2.54mm

	Pin-Out				
Pin	Designation	Function			
1	VCC	Input Power			
2	GND	GND			
3	TXD	TDH_D485H Send Pin			
4	RXD	TDH_D485H Receiving Pin			
5	CON	Send&Receiving Control Pin			
8	B	TDH_D485H B Pin			
9	A	TDH_D485H A Pin			
10	RGND	Isolation Power Output RGND			

#### Notes:

- 1. Packing information please refer to Product Packing Information which can be downloaded from <u>www.mornsun-power.com</u>. Packing bag number: 58220015;
- 2. If the customers using the product for wave soldering, recommended don't open hole on the bottom of the product coverage of PCB board, to avoid the product base thermal deformation;
- 3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% with nominal input voltage and rated output load;
- 4. All index testing methods in this datasheet are based on our Company's corporate standards;
- 5. The performance indexes of the product models listed in this datasheet are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technician for specific information;
- 6. We can provide product customization service;
- 7. Specifications of this product are subject to changes without prior notice.

# Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. ChinaTel: 86-20-38601850-8801Fax: 86-20-38601272E-mail: info@mornsun.cn



MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2015.05.21-A/1 Page 4 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation