
single high speed RS485 isolation transceiver module



PART NUMBER SYSTEM

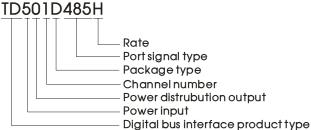

FEATURES

- Two-terminal isolation (input and output are mutually isolated)
- Integrated Isolated DC/DC converter
- Bus protection
- Isolation voltage: 2.5KVDC
- Operating temperature range:-40°C~+85°C
- Baud rate 200Kbps
- Connect up to 32 nodes on one bus

TD301D485H/TD501D485H series are transceiver isolation module with integrated duplex power isolation, electrical isolation, and RS485 interface bus protector; The isolation RS485 circuits of using a piece of power isolation module, three light couplings and RS485 transceivers and device are only need to adopt a RS485 isolation module now. Simplify the customers on the isolation requirements of the design; Products can be easily embedded in the user equipment, achieve function of RS485 network connection.

Selection Guide				
Certification	Part No.	Power Supply input (VDC)		
UL/CE	TD301D485H	3.17~3.45		
	TD501D485H	4.75~5.25		

Input Specifications					
Item		Operating Conditions	Value		
Input Power Static current Supply Send current		Products energized, no communication	≤35mA		
		200Kbps Square wave communication	≤70mA		
Serial interface	Corial interface		TD301D485H compatible with + 3.3 V UART interface		
	sendi interiace		TD501D485H compatible with + 5 V UART interface		
	Pin current		l _{TXD} ≤2mA;l _{RXD} ≤2 mA;l _{CON} ≤5mA		

Bus Interface					
Item		Operating Conditions	Value		
Output	RS485 bus interface		Standard interface RS485 ,pull-up and pull-down resistor, whose value is $5.1 \mathrm{K}\Omega$, have been set to A/B line.		

Transmission Specifications							
Item	Operating Conditions		Value				
Data Rate			200Kbps (max.)				
Transceiver Switching Delay			The delay time from the receiving data switch to the send data: 30 µs(min.), 100 µs(max.).				
The Number of Nodes			Connect up to 32 nodes on one bus				
Transceiver control			Contrary to common RS485 transceiver control level				
		Cont	rol	Input		Output	
Truth Table	Compeller or Observe	CON 0	V	TXD	Α	В	Line state
	Sending Status			1	1	0	Normal
	0			0	0	1	Normal

MORNSUN®

		Control	Input	Output
Truth Table	Doooliding Status	CON	A-B	RXD
Irum lable	Receiving Status	1	≥0.2V	1
		1	≤-0.2V	0

General Specifications				
Item	Operating Conditions	Value		
Electric Isolation		Two-terminal isolation (input and output are mutually isolated)		
Degree of Isolation	testing for 1 minute, leakage current <5mA, humidity <95%	2.5KVDC		
Operating Temperature		-40°C~+85°C		
Transportation and Storage Temperature		-50℃~+105℃		
Operating Humidity		10%~90%		
Max. Casing Temperature	Ta=25°C	≤50 ℃		
Application Environment		The presence of dust, flerce vibration, impulsion and corrosive gas may cause damage to the product		
Safety Standard		IEC60950/EN60950/UL60950		
Safety Certification		IEC60950/EN60950/UL60950		
Safety Class		CLASS III		

Physical Specifications			
Casing Material	Black flame-retardant heat-proof epoxy resin (UL94-V0)		
Package	DIP10		
Weight	4.0g(Typ.)		
Cooling Method	Free air convection		

EMC	C Specifications				
EMI	Conducted Disturbance	CISPR22/EN55022	CLASS A (see 2-@ for recommended circuit)		
EIVII	Radiated Emission	CISPR22/EN55022	CLASS A (see 2-2) for recommended circuit)		
	Electrostatic Discharge	IEC/EN61000-4-2	Contact ±4KV		perf. Criteria B
	EFT	IEC/EN61000-4-4	Power supply port ±2KV	(see 2-① for recommended circuit)	perf. Criteria B
		IEC/EN61000-4-4	Signal port ±1KV	(see 2-3) for recommended circuit)	perf. Criteria B
			Power supply port ±1KV	(see 2-① for recommended circuit)	perf. Criteria B
EMS			Signal port ±0.25KV/±0.5KV	(see 2-3) for recommended circuit)	perf. Criteria B
		0 IFO (FN/ 1000 4 F	Signal port ±0.5KV/±1KV	(see 2-3) for recommended circuit)	perf. Criteria B
	Surge immunity	S	Signal port ±1KV/±2KV	(see 2-3) for recommended circuit)	perf. Criteria B
			Signal port ±2KV/±4KV	(see 2-3) for recommended circuit)	perf. Criteria B
			Signal port ±4KV/±6KV	(see 2-3) for recommended circuit)	perf. Criteria B

Application Precautions

- 1. Please read the technical manual carefully before use; contact our technical support if you have any problem.
- 2. Do not use the product in hazardous areas.
- 3. Use DC power supply for the product and 220V AC power supply is prohibited.
- 4. Do not dismount and assemble the product without permission to avoid failure or malfunction of equipment.

After-sales service

- 1. Ex-factory inspection and quality control have been strictly conducted for the product; if there occurs abnormal operation or possibility of failure of internal module, please contact the local representative or our technical support.
- 2. The warranty period for the product is 3 years as calculated from the date of delivery. If any quality problem occurs under normal use within the warranty period, the product can be repaired or changed for free.


Applied circuit

See Application Notes for Isolated Transmitter for details.


MORNSUN®

Design Reference

1. Typical application

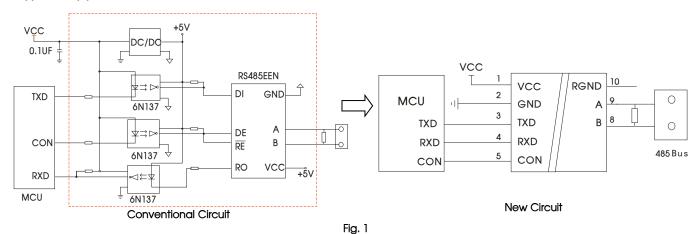

2.Recommended EMC circuit

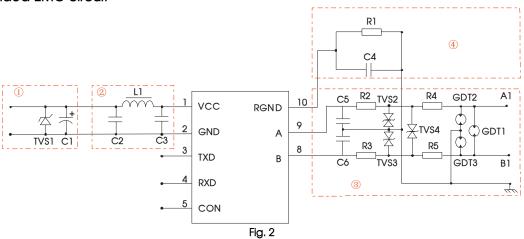

Recommended external circuit parameters:

Madal	TD301D485H/TD501D485H					
Model	±0.25KV/±0.5KV	±0.5KV/±1KV	±1KV/±2KV	±2KV/±4KV	±4KV/±6KV	
C1	220uF/10V(Electrolytic capacitor)		220uF/1	220uF/10V(Electrolytic capacitor)		
TVS1		SMCJ5.0A (TD30	1D485H) / SMCJ6.5	5A(TD501D485H)		
C2/C3	1uF/	50V		1uF/50V		
L1	10	μH		10µH		
C5/C6	100pF/100V		100pF/100V			
C4	lnF/	2KV	1nF/2KV			
R1	1ΜΩ		1ΜΩ			
TVS2/TVS3/TVS4	SMBJ	15CA	SMBJ15CA			
R4/R5	-		10Ω/2W(Wire- wound resistor)	10Ω/2W(Wire- wound resistor)	10Ω/2W(Wire wound resistor)	
R2/R3	10Ω/1W(Wire- wound resistor)	10Ω/2W(Wire- wound resistor)				
GDT1/GDT2/GDT3	_		G30-A90X	S30-A90X	S50-A90X	


Notes:


- GDT1, GDT2 and GDT3 be used instead of a three terminal gas discharge tube, GDT4, GDT5 and GDT6 empathy. Such
 as GDT1, GDT2 and GDT3 three two-terminal device available gas discharge tube instead of a three-terminal at "± 4KV
 / ± 6KV" hierarchy, GDT4, GDT5 and GDT6 empathy, as B3D090L-C.
- 2. It is not needed the component when parameter with the symbol of "--".
- 3. For more information please find the application notes on www.mornsun-power.com

MORNSUN®

Dimensions and Recommended Layout




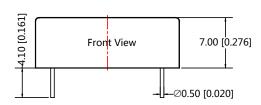



Note: Unit:mm[inch]

Pin diameter tolerances :±0.10[±0.004] General tolerances:±0.25[±0.010]



Note: Grid 2.54*2.54mm

	Pin-Out				
Pin	Designation	Function			
1	VCC	Input Power			
2	GND	GND			
3	TXD	TD_D485H Send Pin			
4	RXD	TD_D485H Receiving Pin			
5	CON	Send&Receiving Control Pin			
8	В	TD_D485H B Pin			
9	Α	TD_D485H A Pin			
10	RGND	Isolation Power Output RGND			

Notes:

- 1. Packing Information please refer to 'Product Packing Information'. Packing bag number: 58040012;
- 2. Unless otherwise specified, data in this datasheet should be tested under the conditions of Ta=25°C, humidity<75% when inputting nominal voltage and outputting rated load;
- 3. All index testing methods in this datasheet are based on our Company's corporate standards;
- 4. The performance indexes of the product models listed in this datasheet are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technician for specific information;
- 5. We can provide product customization service;
- 6. Specifications of this product are subject to changes without prior notice.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn

MORNSUN®