DC/DC Converter

IB05_XT-W75R3 series



0.75W isolated DC-DC converter

Fixed input voltage and regulated single output



CE Patent Protection RoHS

FEATURES

- Continuous short-circuit protection
- No-load input current as low as 5mA
- Operating ambient temperature range: -40°C ~ +85°C
- High efficiency up to 74%
- Compact SMD package
- I/O isolation test voltage 1.5k VDC
- Industry standard pin-out
- Meet UL62368 standard
- EN62368 approved

IB05_XT-W75R3 series is especially designed for distributed power supply systems where an isolated voltage is required. They are particularly suitable for applications of : pure digital circuits, general low frequency analog circuits, relay-driven circuits and data switching circuits.

| Selection (| Guide | | | | | |
|---------------|----------------|----------------------------|------------------|---------------------------|----------------------------|------------------------------|
| | | Input Voltage (VDC) Output | | utput | Full Load | Canacitive Load |
| Certification | Part No. | Nominal (Range) | Voltage (VDC) | Current (mA) Max./Min. | Efficiency(%) Min./Typ. | Capacitive Load (µF) Max. |
| | IB0503XT-W75R3 | | 3.3 | 200/20 | 64/68 | 2400 |
| | IB0505XT-W75R3 | | 5 | 150/15 | 68/72 | 2400 |
| CE | IB0509XT-W75R3 | 5 (4.75-5.25) | 9 | 83/9 | 68/72 | 1000 |
| | IB0512XT-W75R3 | (-17 0 0120) | 12 | 62/7 | 69/73 | 560 |
| | IB0515XT-W75R3 | | 15 | 50/5 | 70/74 | 560 |

| Operating Conditi | Min. | Typ. | Max. | Unit | | |
|-------------------|--------------------|------------------------------|--|--|---|--|
| 5VDC input | 3.3VDC/5VDC output | | 221/5 | 234/10 | | |
| | 9VDC/12VDC output | | 208/12 | 221/20 | mA | |
| | 15VDC output | | 202/18 | 215/30 | | |
| | | | 15 | | mA | |
| | Capacitance Filter | | | | | |
| | Unavailable | | | | | |
| | | 5VDC input 9VDC/12VDC output | 3.3VDC/5VDC output 5VDC input 9VDC/12VDC output | 5VDC input 3.3VDC/5VDC output 221/5 9VDC/12VDC output 208/12 15VDC output 202/18 15 Capacito | SVDC input 3.3VDC/5VDC output 221/5 234/10 5VDC input 9VDC/12VDC output 208/12 221/20 15VDC output 202/18 215/30 15 Capacitance Filter | |

Note: * Refer to DC-DC Converter Application Notes for detailed description of reflected ripple current test method.

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|--------------------------|----------------------|---------------------------|------|------|---------------|-------------|
| Voltage Accuracy | | Input voltage change: ±1% | | | ±3 | |
| Linear Regulation | Input voltage change | | | | ±0.25 | o/ |
| Load Regulation | 10% 100% logged | 3.3VDC output | | | ±3 | ~ % |
| | 10%-100% load | Others | | | ±2 | |
| Ripple & Noise* | 20MHz bandwidth | 20MHz bandwidth | | | 75 | mVp-p |
| Temperature Coefficient | 100% load | 100% load | | | | %/ ℃ |
| Short-circuit Protection | | | | | self-recovery | |

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.04.16-A/3 Page 1 of 5

DC/DC Converter

IB05_XT-W75R3 series


MORNSUN®

| General Specifications | | | | | | |
|--|---------------------------------------|---|--------------------------|----------------------|--------------|-------------|
| Item | Operating Condi | tions | Min. | Тур. | Max. | Unit |
| Isolation | Input-output Elec with a leakage c | 1500 | | | | |
| Isolation | | tric Strength Test for 1 second urrent of 1mA max. | 3000 | VDC | | |
| Insulation Resistance | Input-output resis | 1000 | | | MΩ | |
| Isolation Capacitance | Input-output cap | | 20 | | pF | |
| Operating Temperature | Derating when o (see Fig. 1) | -40 | | 85 | ĉ | |
| Storage Temperature | | -55 | | 125 | | |
| | | 3.3VDC output | | 30 | | |
| Case Temperature Rise | Ta =25℃ | Others | | 25 | | |
| Reflow Soldering Temperature* | | I | Peak temp. over 217°C | ≪ 245 ℃, maxi | imum duratic | on time≤60s |
| Storage Humidity | Non-condensing | | | | 95 | %RH |
| Switching Frequency | 100% load, nomir | nal input voltage | | 270 | | KHz |
| MTBF | MIL-HDBK-217F@2 | 3500 | | | K hours | |
| Moisture Sensitivity Level (MSL) | IPC/JEDEC J-STD- | | Lev | vel 1 | | |
| Note: * Please also refer to IPC/JEDEC | J-STD-020D.1 for additio | nal information. | | | | |

| Mechanical Specifications | | | | | | |
|---------------------------|--|--|--|--|--|--|
| Case Material | Black plastic; flame-retardant and heat-resistant (UL94 V-0) | | | | | |
| Dimensions | 20 x 11.40 x 7.25mm | | | | | |
| Weight | 1.4g(īyp.) | | | | | |
| Cooling Method | Free air convection | | | | | |

| Electromagnetic Compatibility (EMC) | | | | | | | | |
|-------------------------------------|-----|-----------------|--|--|--|--|--|--|
| Emissions | CE | CISPR32/EN55032 | CLASS B (see Fig. 3 for recommended circuit) | | | | | |
| | RE | CISPR32/EN55032 | CLASS B (see Fig. 3 for recommended circuit) | | | | | |
| Immunity | ESD | IEC/EN61000-4-2 | Air ±8kV, Contact ±4kV perf. Criteria B | | | | | |

Typical Characteristic Curves

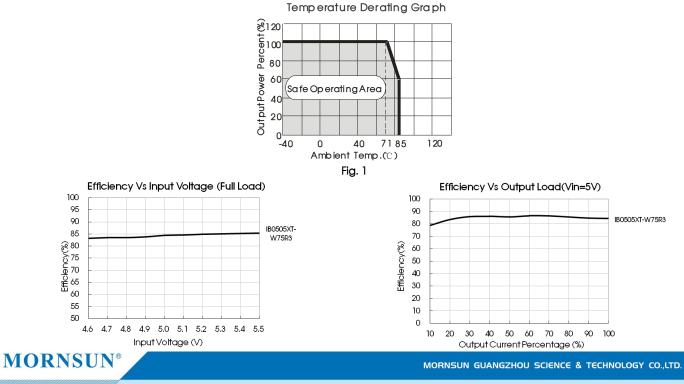

2019.04.16-A/3 Page 2 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation




Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig.2.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1. Table 1:Recommended input and output capacitor values



| Vin(VDC) | Cin(µF) | Vo (VDC) | Cout(µF) | | | | | |
|----------|---------|----------|----------|--|--|--|--|--|
| | | 3.3/5 | 10 | | | | | |
| 5 | 4.7 | 9/12 | 2.2 | | | | | |
| | | 15 | 1 | | | | | |

2. EMC compliance circuit

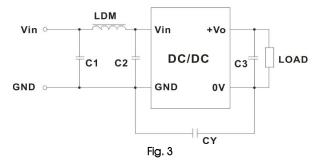


Table 2: Recommended EMC filter values

| | Output vol | tage(VDC) | 3.3/5/9 | 12/15 |
|---------|------------------------------------|-----------|------------|--|
| | Input voltage 5VDC Emissions | C1/C2 | 4.7µF /25V | 4.7µF /25V |
| voltage | | СҮ | | 1nF/2KVDC HEC C1206X102K202T JOHANSON 202R18W102KV4E |
| | | C3 | Refer | to the Cout in table 1 |
| | | | 6.8µH | 6.8µH |

Note: We recommend the use of a Y-capacitor CY with a value of 1nF/4kV to help even further reduce emissions.

3. For additional information please refer to DC-DC converter application notes on <u>www.mornsun-power.com</u>





MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.


MORNSUN®

Dimensions and Recommended Layout











0.40 [0.016]


Note: Unit: mm[inch] Pin section tolerances: ±0.10[±0.004] General tolerances: ±0.25[±0.010]




| Pin-Out | | | | | | |
|---------|----------|--|--|--|--|--|
| Pin | Function | | | | | |
| 1 | GND | | | | | |
| 2 | Vin | | | | | |
| 4 | 0V | | | | | |
| 5 | +Vo | | | | | |
| 8 | NC | | | | | |

NC: Pin to be isolated from circuitry

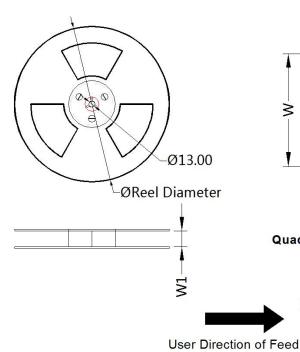

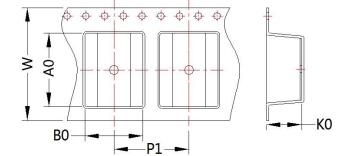

Quadrant assignments for PIN 1 orientation in tape



Pocket Quadrants

| Device | Package Type | Pin | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|-----------------|-----|-----|--------------------------|--------------------------|------------|------------|------------|------------|-----------|------------------|
| IB05_XT-W75R3 | SMD | 5 | 500 | 330.0 | 24.5 | 13.4 | 11.7 | 7.5 | 16.0 | 24.0 | Q1 |

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.04.16-A/3 Page 4 of 5

Sprocket holes

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation



Notes:

- 1. For additional information on Product Packaging please refer to <u>www.mornsun-power.com</u>. Tube Packaging bag number: 58210024, Roll Packaging bag number: 58200054;
- 2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- 3. The maximum capacitive load offered were tested at input voltage range and full load;
- 4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- 5. All index testing methods in this datasheet are based on our company corporate standards;
- 6. We can provide product customization service, please contact our technicians directly for specific information;
- 7. Products are related to laws and regulations: see "Features" and "EMC";
- 8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. ChinaTel: 86-20-38601850Fax: 86-20-38601272E-mail: info@mornsun.cnwww.mornsun-power.com

MORNSUN[®]

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.04.16-A/3 Page 5 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation